


AURA 2x4

RECESSED

QuickShip+

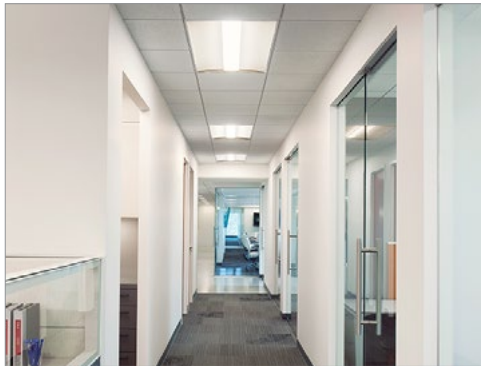

The perfect blend of lighting performance and timeless aesthetic. Aura features a triple lens design with a ribbed center optical diffuser that provides balanced brightness and visual comfort. High-performance LED technology combined with the flexibility of optional integral controls deliver considerable energy savings. Aura is ideal for a variety of indoor applications including offices, institutions and commercial spaces. Installation and maintenance are made easy with toolless lens installation and access to all components from below.



Depletion Policy - 50 units

14 calendar days or less

Ordering Guide

PRODUCT ID		SIZE		NOMINAL LUMENS		CRI		COLOUR TEMP.		SHIELDING		FINISH	
AULED	Aura	24	2'X4'	3100	3100 lm	80	80 CRI	30	3000 K	SO	spotless optics	W	white
				4500	4500 lm			35	3500 K				
				5000	5000 lm								
				7000	7000 lm								
				9000	9000 lm								

VOLTAGE		DRIVER		CIRCUITS		MOUNTING		BATTERY (OPTIONAL)		OTHER (OPTIONAL)	
120	120 V	DP	dimming (0-10V) 1%	1	1 circuit	TB9	t-bar 9/16"	B#	battery pack	F	fuse ⁽⁴⁾
277	277 V	D	dimming (0-10V) 5% 347V standard ⁽²⁾			TB15	t-bar 15/16"			FW(#)	flex whip (6' std)
347	347 V ⁽¹⁾	LT	Lutron ⁽³⁾			ST	screw slot t-bar			CP	Chicago plenum
UNV	universal					TG9	tegular 9/16"				
						TG15	tegular 15/16"				
						DF	drywall flange				
(1) D dimming (0-10V) 5% standard		(2) For 347V only (3) Hi-Lume A Series L3D						Please consult factory		(4) Requires 120V or 277V	

Refer to specification sheets for complete details. Note that only options shown above qualify for QuickShip+.



Product design and development is an ongoing process at Axis Lighting. We reserve the right to change specifications. Contact Axis for the latest product information.