


PROJECT INFORMATION

Project:


Type:

IMPORTANT – all corner patterns must be submitted with drawings indicating dimensions and angles degree.

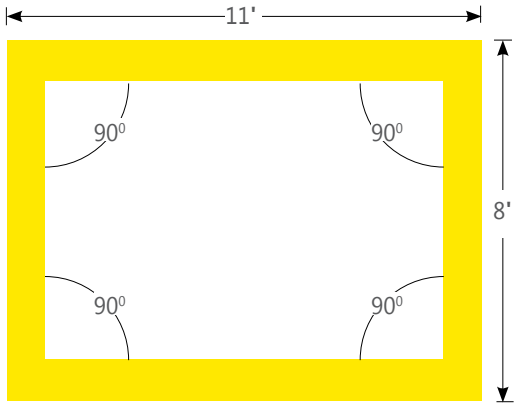


BMWDPAT	REC	90+90+90+90	38'
1	2	3	5

TOP VIEW - Rectangle Corner Patterns

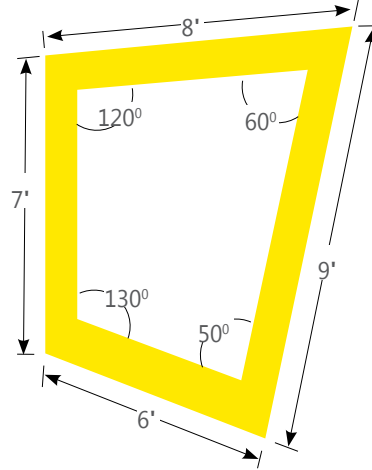

BWDPAT	ASO	120+60+50+130	30'
1	2	3	5

TOP VIEW - Corner Patterns

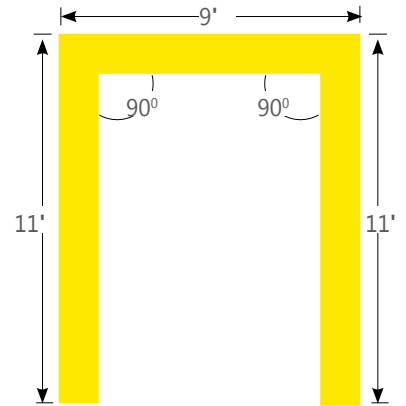

BBWDPAT	OPR	90+90	31'
1	2	3	9

TOP VIEW - Open Shape Corner Pattern

NOTE: Pattern length is determined by lamp length

ORDERING CODE

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----

PRODUCT SPECIFICATIONS

1	PRODUCT ID	2	PATTERNS	3	CORNER DEGREES	4	OPTICS DIRECT	5	LENGTH/FT	6	SPECIFY LENGTH
BWDPAT	beam2 wall direct	SQ	square regular lit corners	90	90 degrees	S	satin lens	#	total pattern length	NL	nominal (3' & 4' lamps)
BWIPAT	beam2 wall indirect	REC	rectangle regular lit corners	#	other degree	F	frosted lens ⁽¹⁾			NL4	nominal (4' lamps only)
TBWDPAT	twinbeam wall direct/indirect	ASO	other shape regular lit corners							EX	exact (3' & 4' lamps)
TBWIPAT	twinbeam wall indirect	OPR	open shape regular lit corners							EX4	exact (4' lamps only)
BMWDPAT	beam3 wall direct										
BMWIPAT	beam3 wall indirect										
BBWDPAT	beam4 wall direct/indirect										
BBWIPAT	beam4 wall indirect										
B6WDPAT	beam6 wall direct/indirect										
B6WIPAT	beam6 wall indirect										
						(1) not recommended with staggered lamping					

7	LAMP	8	DOWN LAMP	9	UP LAMP	10	FINISH	11	VOLTAGE	12	BALLAST
T5	T5	0	0 lamp	0	0 lamp	AP	aluminum paint	120	120V	D	dimming
T5HO	T5HO	1	1 lamp	1	1 lamp	W	white	277	277V	E	instant start
T8	T8 ⁽²⁾	2	2 lamps ⁽³⁾	2	2 lamps ⁽⁵⁾	C	custom	347	347V ⁽⁵⁾	ERS	rapid start
		+S	staggered ⁽⁴⁾	+S	staggered ⁽⁶⁾			UNV	universal	BI	bi-level dimming
(2) not available for beam2 and beam3 staggered		(3) not available for beam2 and beam3 (4) available with 1 lamp only		(5) not available for beam2 and beam3 (6) available with 1 lamp only				(7) Please consult factory			

13	CIRCUITS	14	BATTERY	15	OTHER	16	CUSTOM
1	1 regular	B#	battery pack 4' sections	F	fuse	C	custom
2	2 regular			D	dust cover		
2A/B	2 alternating						
+E(#)	emergency section						
+NL(#)	night light section						
+GTD(#)	generator transfer device						
Please specify							

● **LIT CORNER FEATURES**


The Lit Corner system allows continuous illumination all the way through the corner section

To optimize corner illumination, lit corners are created as integral components of the linear sections. Linear sections have mitered ends that connect to corresponding mitered ends of neighboring linear sections.

Illuminated Corners are more complex. Because the corner is fully illuminated, the corner is not independent of the straight sections, but integrated into the straight segment's housing. The corner is mitered, allowing a seamless line of light.

Regular Illuminated Corner - A fully illuminated corner that lies on the same plane. There are two corner options available for Regular Lit Corners: **Open Shape Corner** and **Closed Shape Corner**

TIP: Provide sketches illustrating corner types and locations required.

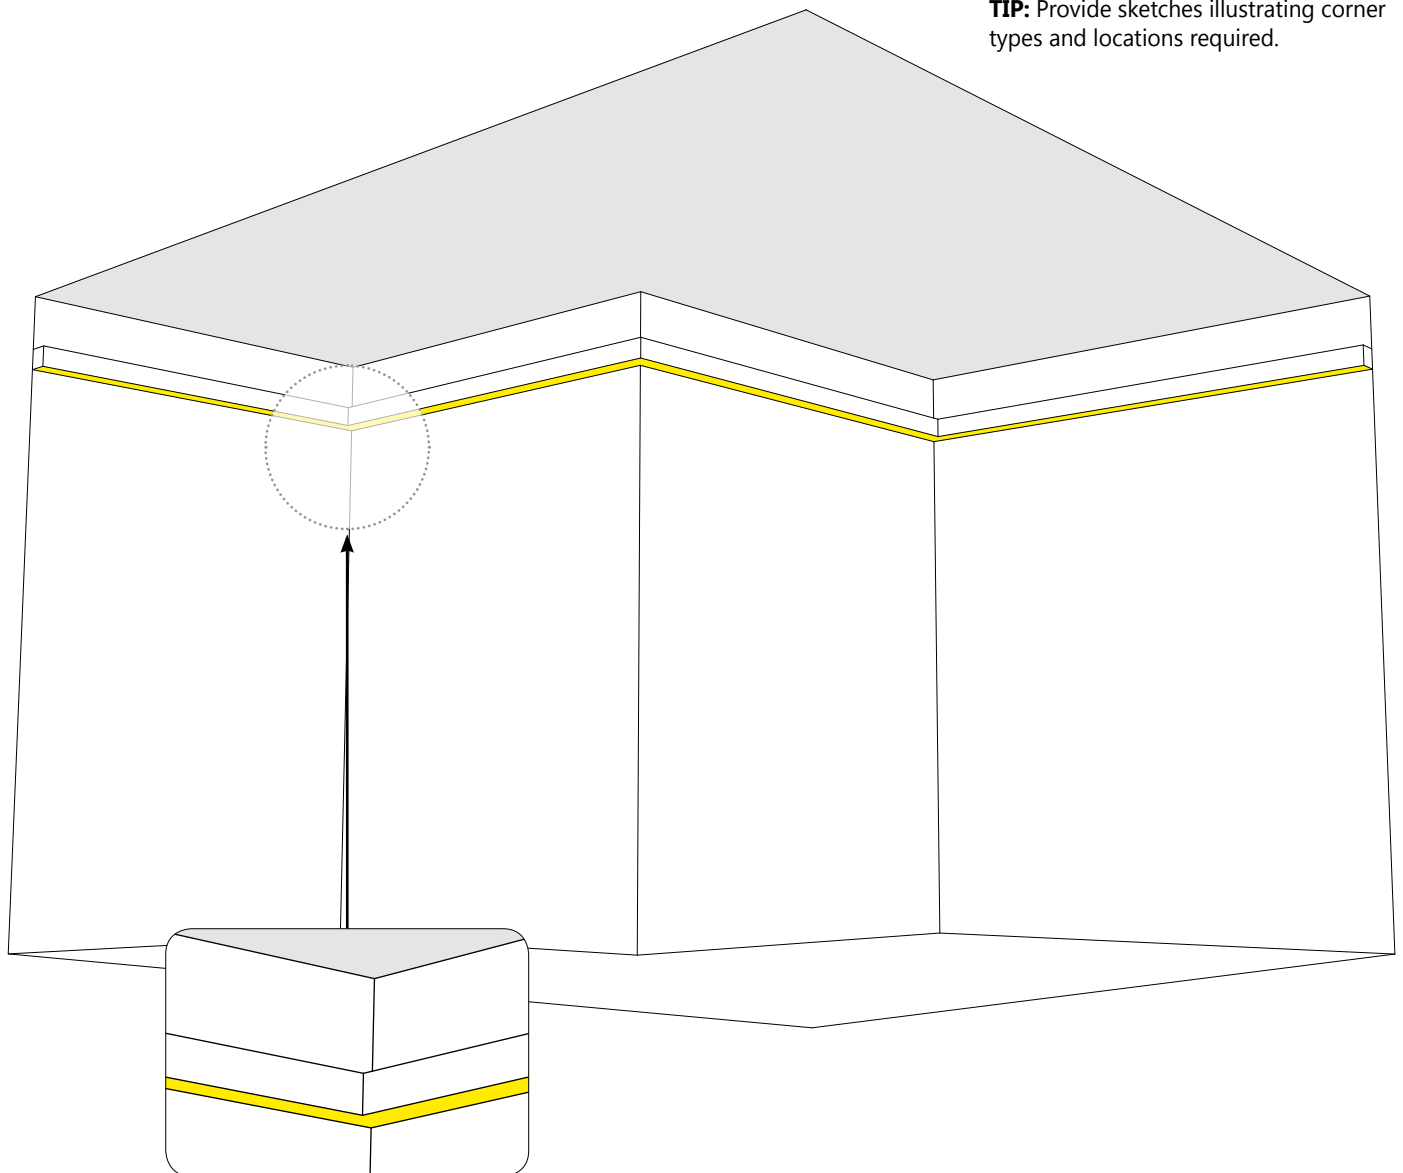

Open Shape Corner

IMPORTANT – all corner patterns must be submitted with drawings indicating dimensions and angles degree.

