


*** Please see page 2 for example on how to specify various right angle patterns.**

Project _____


Type _____

Notes _____

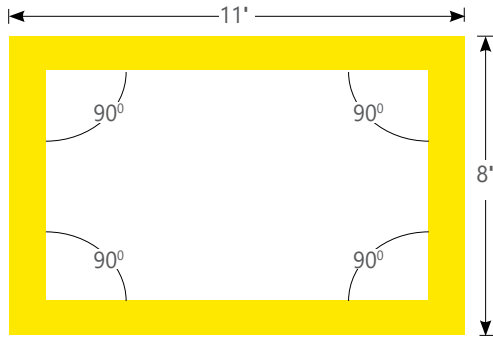

B2SQRLEDPAT	R (11'X8')
PRODUCT ID	PATTERNS AND LENGTH

TOP VIEW - Rectangle Corner Pattern

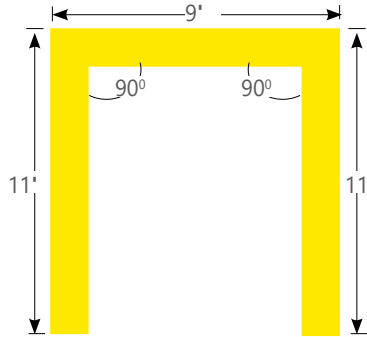

B2SQRLEDPAT	U (11'X 9' X11')
PRODUCT ID	PATTERNS AND LENGTH

TOP VIEW - Open Shape Corner Pattern

IMPORTANT! – all corner patterns must be submitted with drawings indicating dimensions and angles degree.

Refer to axislighting.com for complete fixture details, IES files, and installation instructions



Ordering Guide

B2SQRLEDPAT																			
PRODUCT ID				PATTERNS (SELECT ONE)				LUMENS/FT				CRI		COLOUR TEMP.		SHIELDING		SPECIFY LENGTH	
B2SQRLEDPAT	Beam 2 Square Recessed LED	S(L)*	square shape (length)	300	300 lm/ft - min			80	80 CRI	30	3000 K	SO	spotless lens		NL	nominal			
		R(LxL)*	rectangular shape (length)	750	750 lm/ft - max for GZ, NW, WW, ASO.*					35	3500 K	ASO	asymmetric, flush only				EX	exact	
		U(LxLxL)*	U shape (length)	1000	1000 lm/ft - max					40	4000 K	BW	batwing, flush only						
		L(LxL)*	L shape (length)									NW	narrow, flush only						
											GZ	graze, flush only							
												WW	wallwash, flush only						
				*Comes in 90 degree only.				Outputs between listed min and max are available. * 750 lm/ft max. only for GZ, NW, WW and ASO.											


FINISH		VOLTAGE		DRIVER		CIRCUITS		MOUNTING		BATTERY (OPT.)		OTHER (OPT.)		QUICKSHIP + QS
W	white	120	120V	DP	dimming (0-10V) 1%	1	1 circuit	TB9	t-bar 9/16"	B#	battery pack	EF	end feed	
BLK	black*	277	277V			2	2 circuits	TB15	t-bar 15/16"		4' sections	FW	flex whip (6' std)*	
AP	aluminum paint*	347	347V			+E(#)	emergency circuit*	ST	screw slot t-bar			CP	Chicago plenum	
		UNV	universal					TG9	tegular 9/16"					
								TG15	tegular 15/16"					
								DF	drywall flange					
								D	drywall flangeless					
								DS	drywall spackle flange					
* Additional 5 workdays required.						*Specify quantity				Requires 120V or 277V Please consult factory		* Other lengths available; please consult factory.		

Refer to specification sheets for complete details. Note that only options shown above qualify for QuickShip+.


How to Specify 90 degree Corners and Patterns

Example

Defining R - Rectangular shape

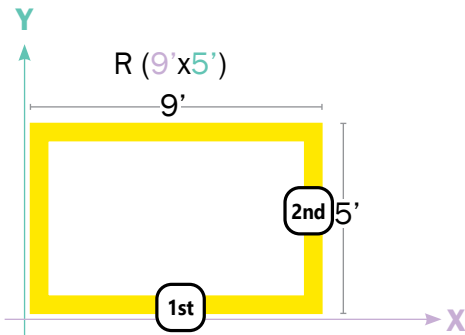


Defining L shape

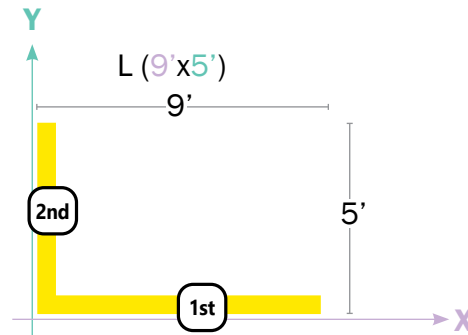


Note: The first number will always define the width, the second - the length.

Defining U shape

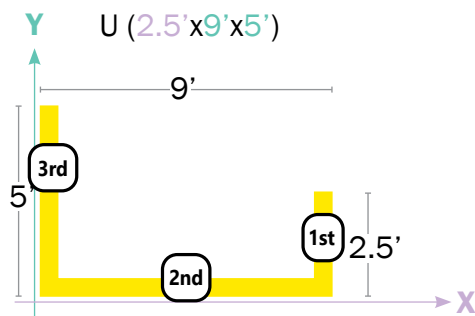

Note: The first number will always define the right arm length, the second - the width, and the third - the left arm length.

Defining S - Square shape

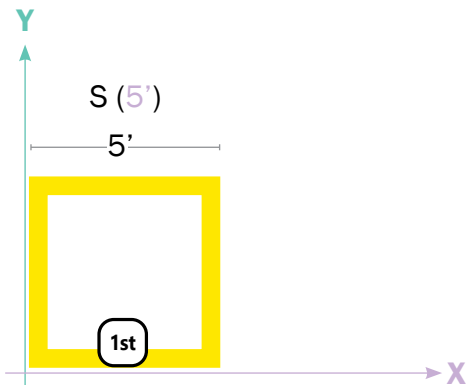

Note: The number will define the width. (All sides are the same length).



A large grid of squares, intended for drawing corner patterns. The grid is composed of 30 columns and 30 rows of squares, providing a space for technical drawings.