


● **PROJECT INFORMATION**

Project:


Type:

**IMPORTANT – all corner patterns must be submitted with drawings indicating dimensions and angles degree.**

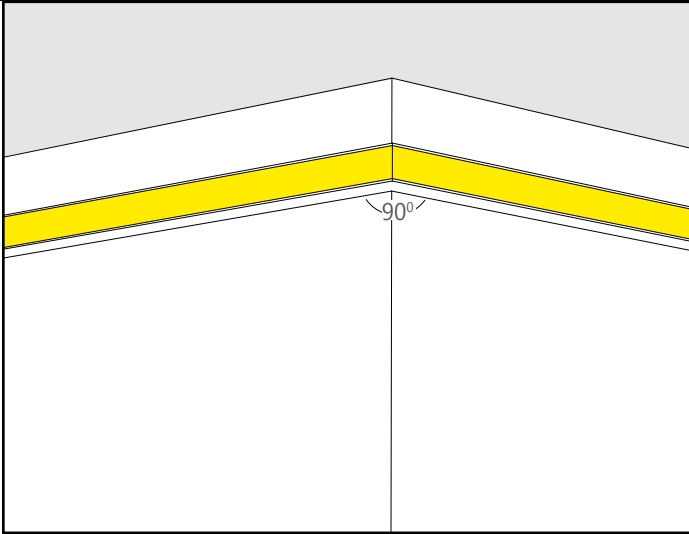

BBWPAT	OPO	90	16'
<b>1</b>	<b>2</b>	<b>3</b>	<b>5</b>

3D VIEW - Outside Corner Pattern

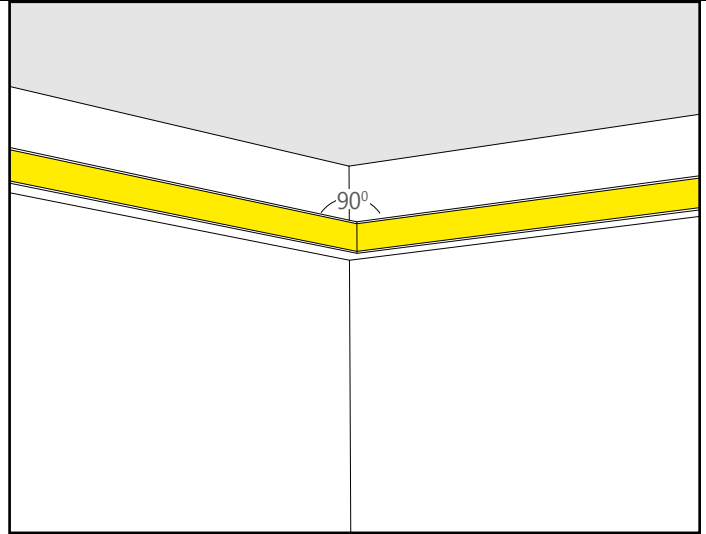

BBWPAT	OPI	90	16'
<b>1</b>	<b>2</b>	<b>3</b>	<b>5</b>

3D VIEW - Inside Corner Pattern

**NOTE: Pattern length is determined by lamp length**

● **ORDERING CODE**

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----

● **PRODUCT SPECIFICATIONS**

1 PRODUCT ID	2 PATTERNS	3 CORNER DEGREES	4 OPTICS DIRECT	5 LENGTH/FT	6 SPECIFY LENGTH
<b>BWPAT</b> beam2 wall <b>BMWPAT</b> beam3 wall <b>BBWPAT</b> beam4 wall <b>B6WPAT</b> beam6 wall	<b>SQ</b> square regular lit corners <b>REC</b> rectangle regular lit corners <b>ASO</b> other shape regular lit corners <b>OPR</b> open shape regular lit corners	<b>90</b> 90 degrees <b>#</b> other degree	<b>S</b> satin lens <b>F</b> frosted lens <sup>(1)</sup>	<b>#</b> total pattern length	<b>NL</b> nominal (3' & 4' lamps) <b>NL4</b> nominal (4' lamps only) <b>EX</b> exact (3' & 4' lamps) <b>EX4</b> exact (4' lamps only)
			(1) not recommended with staggered lamping		
7 LAMP	8 LAMP	9 FINISH	10 VOLTAGE	11 BALLAST	
<b>T5</b> T5 <b>T5HO</b> T5HO <b>T8</b> T8	<b>0</b> 0 lamp <b>1</b> 1 lamp <b>2</b> 2 lamps <sup>(2)</sup> <b>+S</b> staggered <sup>(3)</sup>	<b>AP</b> aluminum paint <b>W</b> white <b>C</b> custom	<b>120</b> 120V <b>277</b> 277V <b>347</b> 347V <sup>(5)</sup> <b>UNV</b> universal	<b>D</b> dimming <b>E</b> instant start <b>ERS</b> rapid start <b>T</b> step dimming <sup>(6)</sup>	
(2) not available for beam2 and beam3 (3) only T5/T5HO 1 lamp staggered for beam2 and beam3 Staggered lamping and configurations must be the same up and down.		(5) Please consult factory		Use ballast guide for ballast specification (6) In T5HO, only available for 2x4' lamp configuration	

12 CIRCUITS	13 BATTERY	14 OTHER	15 CUSTOM
<b>1</b> 1 regular <b>2</b> 2 regular <b>2A/B</b> 2 alternating <b>+E#</b> emergency section <b>+NL#</b> night light section <b>+GTD#</b> generator transfer device	<b>B#</b> battery pack 4' sections	<b>F</b> fuse <b>D</b> dust cover	<b>C</b> custom
Please specify			

Ballast, Battery Pack and Integrated Control Details and Custom Description:



**LIT CORNER FEATURES**

The Lit Corner system allows continuous illumination all the way through the corner section


To optimize corner illumination, lit corners are created as integral components of the linear sections. Linear sections have mitered ends that connect to corresponding mitered ends of neighboring linear sections.

Illuminated Corners are more complex. Because the corner is fully illuminated, the corner is not independent of the straight sections, but integrated into the straight segment's housing. The corner is mitered, allowing a seamless line of light.

**Inside Illuminated Corner.** A fully lit corner on the inside planes.

**Outside Illuminated Corner** - A fully lit corner on the outside planes.

**TIP:** Provide sketches illustrating corner types and locations required.

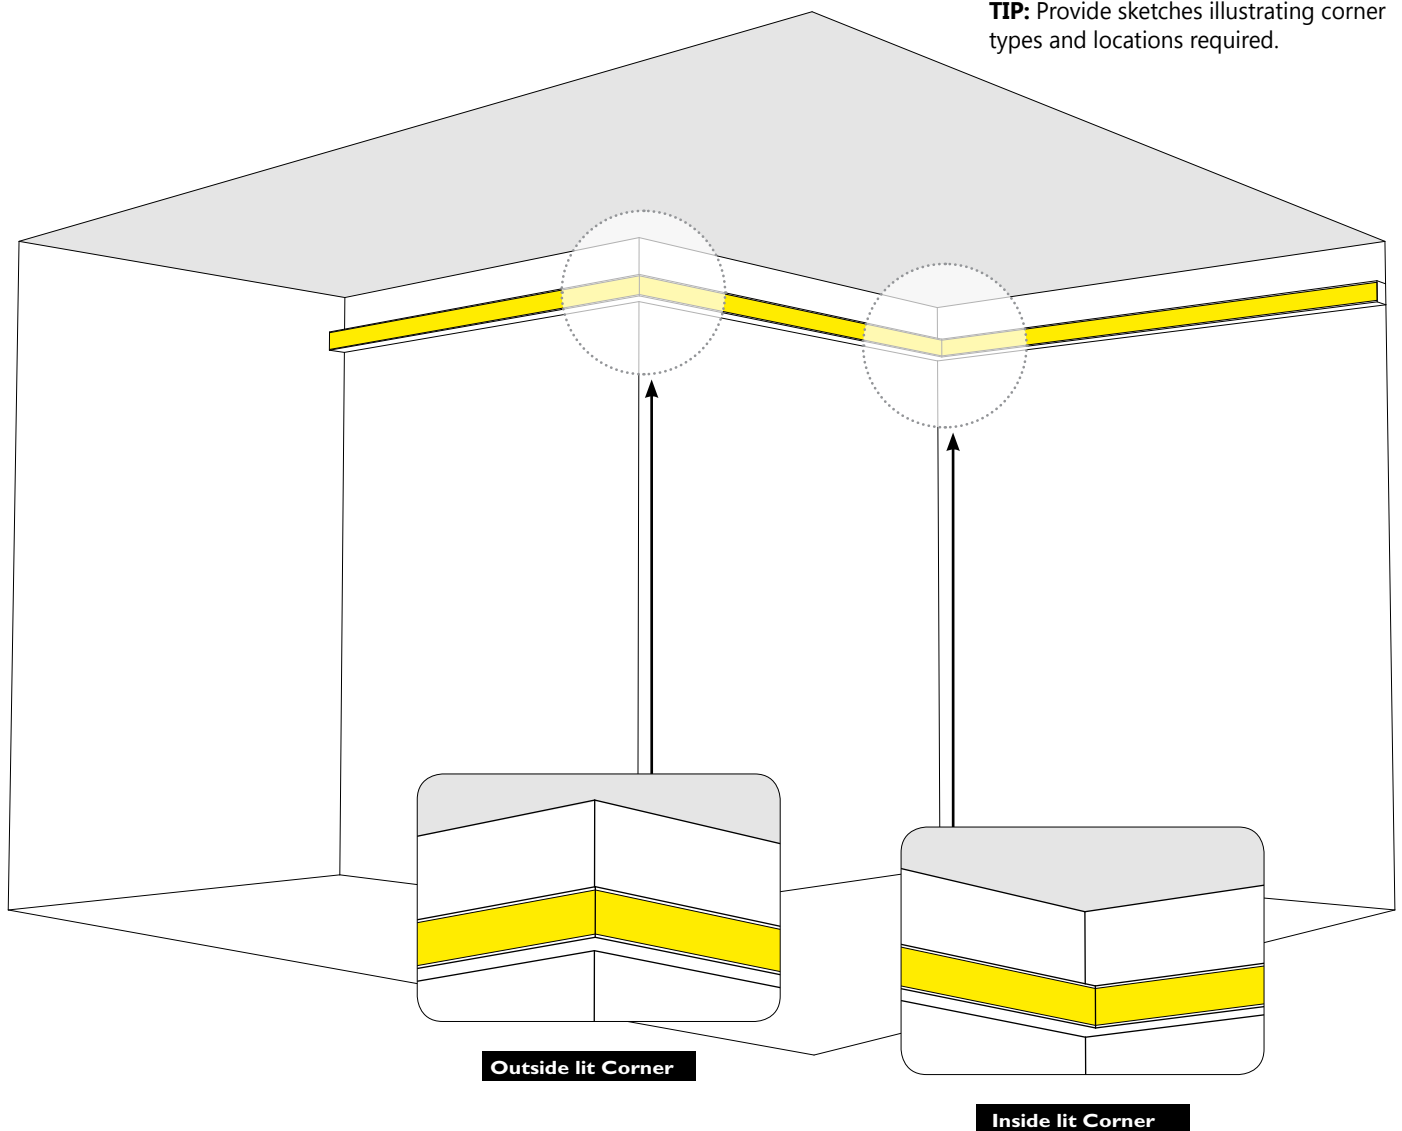

**IMPORTANT – all corner patterns must be submitted with drawings indicating dimensions and angles degree.**

