


**\* Please see page 2 for example on how to specify various right angle patterns.**

Project \_\_\_\_\_


Type \_\_\_\_\_

Notes \_\_\_\_\_

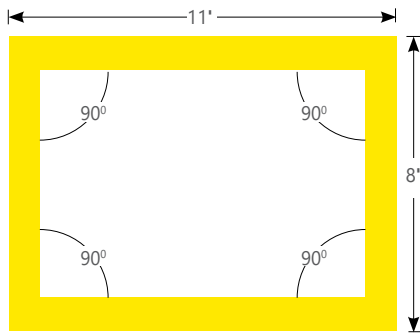

TB4DLEDPAT	R (11'X8')
PRODUCT ID	PATTERNS AND LENGTH

TOP VIEW - Rectangle Corner Pattern

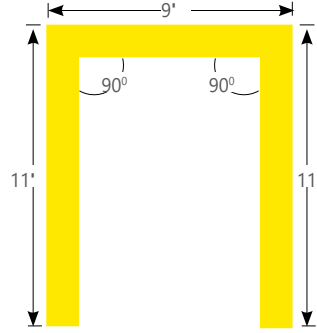

TB4DLEDPAT	U (9'X11'X11')
PRODUCT ID	PATTERNS AND LENGTH

TOP VIEW - Open Shape Corner Pattern

**IMPORTANT! – all corner patterns must be submitted with drawings indicating dimensions and angles degree.**

Refer to [axislighting.com](http://axislighting.com) for complete fixture details, IES files, and installation instructions



## Ordering Guide

TB4DLEDPAT	PRODUCT ID	PATTERNS AND LENGTH (SELECT ONE)	LUMENS/FT DIRECT	CRI	COLOUR TEMP.	SHIELDING DIRECT	SPECIFY LENGTH
TB4DLEDPAT	Beam 4 Direct	<b>S(L)</b> square shape (length) <b>R(LxL)</b> rectangular shape (length) <b>U(LxLxL)</b> U shape (length) <b>L(LxL)</b> L shape (length)	<b>400</b> 400 lm/ft - Minimum <b>1000</b> 1000 lm/ft - max for GZ, NW, WW, ASO.* <b>1200</b> 1200 lm/ft - Maximum	<b>80</b> 80 CRI	<b>35</b> 3500 K <b>30</b> 3000 K <b>40</b> 4000 K	<b>SO</b> spotless lens <b>ASO</b> asymmetric, <b>BW</b> batwing <b>NW</b> narrow <b>GZ</b> graze <b>WW</b> wallwash	<b>NL</b> nominal <b>EX</b> exact
		Comes in 90 degree only.	Outputs between listed min and max are available. * 1000 lm/ft max. only for GZ, NW, WW and ASO.				


FINISH	VOLTAGE	DRIVER	CIRCUITS	MOUNTING/SUSPENSION	BATTERY (OPT.)
<b>W</b> white <b>BLK</b> black* <b>AP</b> aluminum paint*	<b>120</b> 120V <b>277</b> 277V <b>347</b> 347V <b>UNV</b> universal	<b>DP</b> dimming (0-10V) 1%	<b>1</b> 1 circuit <b>2</b> 2 circuits <b>+E(#)</b> emergency circuit*	<b>CA(#)</b> drywall+cable length (36"std) <b>CT9(#)</b> TB/TG 9/16+cable length (36" std.) <b>CT15(#)</b> TB/TG15/16+cable length (36" std.) <b>CTS(#)</b> screw slot+cable length (36" std.) <b>SA(#)</b> drywall+stem length>48 (18"std) <b>CASL(#)</b> drywall cable sloped ceiling <b>SASL(#)</b> drywall stem sloped ceiling	<b>B(#)</b> battery pack 4' sections
*Additional 5 working days required.			*Specify quantity	<a href="#">See Mounting kit guide for full specification code.</a>	Requires 120V or 277V Please consult factory

**Refer to specification sheets for complete details. Note that only options shown above qualify for QuickShip+.**


## How to Specify 90 degree Corners and Patterns

### Example

#### Defining R - Rectangular shape

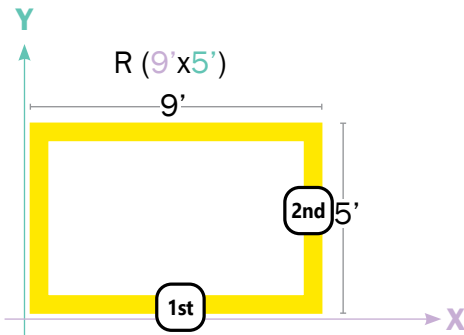


#### Defining L shape

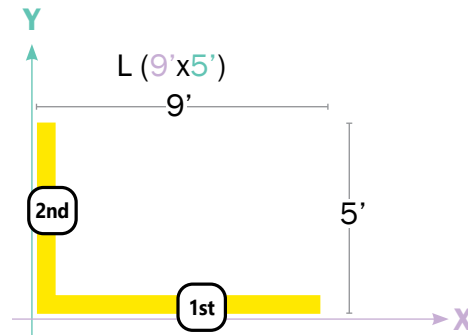


**Note:** The first number will always define the width, the second - the length.

#### Defining U shape

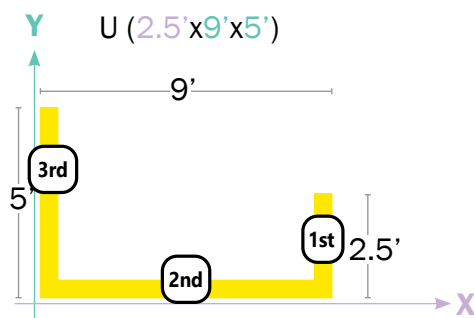

**Note:** The first number will always define the right arm length, the second - the width, and the third - the left arm length.

#### Defining S - Square shape

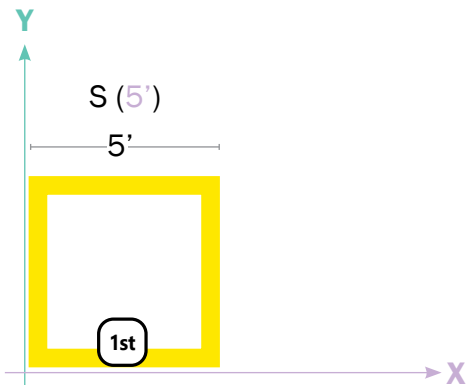

**Note:** The number will define the width. (All sides are the same length).

**IMPORTANT – all corner patterns must be submitted with drawings indicating dimensions and angles degree.**



A large grid of squares, intended for drawing corner patterns. The grid consists of 30 columns and 30 rows of squares, providing a space for technical drawings.