







Project \_\_\_\_\_  
 Type \_\_\_\_\_  
 Notes \_\_\_\_\_

### INSPIRATION LAYOUT

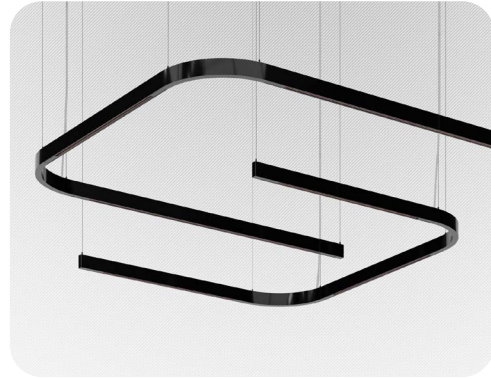


#### 5ft x 6ft x 5ft U-shape:

- 1 x Framework: 4ft segments (3) + LC90 Hub (2) + EC Hub (2)
- 3 x Direct AxisTrak™ Inserts (4ft)




#### 5ft x 7ft x 5ft U-shape:

- 1 x Framework: 4ft segments (2) + 5ft segments (1) + LC90 Hub (2) + EC Hub (2)
- 2 x Direct AxisTrak™ Inserts (4ft)
- 1 x Direct AxisTrak™ Inserts (5ft)




#### 5ft x 8ft x 5ft U-shape:

- 1 x Framework: 4ft segments (2) + 6ft segments (1) + LC90 Hub (2) + EC Hub (2)
- 2 x Direct AxisTrak™ Inserts (4ft)
- 1 x Direct AxisTrak™ Inserts (6ft)




#### 6ft x 6ft x 6ft U-shape:

- 1 x Framework: 5ft segments (2) + 4ft segments (1) + LC90 Hub (2) + EC Hub (2)
- 2 x Direct AxisTrak™ Inserts (5ft)
- 1 x Direct AxisTrak™ Inserts (4ft)
- 2 x Indirect Surroundlite Inserts (5ft)




#### 6ft x 7ft x 6ft U-shape:

- 1 x Framework: 5ft segments (3) + LC90 Hub (2) + EC Hub (2)
- 3 x Direct AxisTrak™ Inserts (5ft)
- 3 x Indirect Surroundlite Inserts (5ft)




#### 6ft x 8ft x 6ft U-shape:

- 1 x Framework: 5ft segments (2) + 6ft segments (1) + LC90 Hub (2) + EC Hub (2)
- 2 x Direct AxisTrak™ Inserts (5ft)
- 1 x Direct AxisTrak™ Inserts (6ft)
- 2 x Indirect Surroundlite Inserts (5ft)
- 1 x Indirect Surroundlite Inserts (6ft)




#### 7ft x 6ft x 7ft U-shape:

- 1 x Framework: 6ft segments (2) + 4ft segments (1) + LC90 Hub (2) + EC Hub (2)
- 2 x Direct AxisTrak™ Inserts (6ft)
- 1 x Direct AxisTrak™ Inserts (4ft)
- 2 x Indirect Surroundlite Inserts (6ft)



#### 7ft x 7ft x 7ft U-shape:

- 1 x Framework: 6ft segments (2) + 5ft segments (1) + LC90 Hub (2) + EC Hub (2)
- 2 x Direct AxisTrak™ Inserts (6ft)
- 1 x Direct AxisTrak™ Inserts (5ft)
- 2 x Indirect Surroundlite Inserts (6ft)
- 1 x Indirect Surroundlite Inserts (5ft)



#### 7ft x 8ft x 7ft U-shape:

- 1 x Framework: 6ft segments (3) + LC90 Hub (2) + EC Hub (2)
- 3 x Direct AxisTrak™ Inserts (6ft)
- 3 x Indirect Surroundlite Inserts (6ft)

### Patented Design

Product design and development is an ongoing process at Axis Lighting. We reserve the right to change specifications. Contact Axis for the latest product information.

1 / 2  
 February 28, 2024

FILE NAME: Stencil-Flex-AXT-U-SHAPE-KITS.SPEC

© 2016 Axis Lighting Inc.  
 1.800.263.2947  
 [T] 514.948.6272



Project \_\_\_\_\_

Type \_\_\_\_\_

Notes \_\_\_\_\_

AxisTrak™ decoratives must be ordered separately. Please follow the link:



## Ordering Guide Framework

PRODUCT ID	FINISH	UNV VOLTAGE	CONTROLS	CIRCUITS	MOUNTING/SUSPENSION	CANOPY
5x6x5ft U-form Pendant 5x7x5ft U-form Pendant 5x8x5ft U-form Pendant 6x6x6ft U-form Pendant 6x7x6ft U-form Pendant 6x8x6ft U-form Pendant 7x6x7ft U-form Pendant 7x7x7ft U-form Pendant 7x8x7ft U-form Pendant	BLK black W white AP aluminum paint C(#) custom	UNV universal	IMW Integral Modular Wiring for 0-10V dimming (1%) with DP integral driver IMWD Integral Modular Wiring for DALI 2.0 with DALIDT6 integral driver	Number of circuits will depend on the ordered kit, and matches lighting zone count	CA(#) drywall+cable length (36" std.)* SLV(#) drywall+stem length <48" (18" std.) leveling	RC round canopy SC square canopy
					Specify suspension length * See <a href="#">Mounting kit guide for full specification code.</a> White canopy standard. Other canopies are available. Please visit the link above.	Not available with (SLV) stem mounting.

## Ordering Guide Linear Lighting Inserts

SFLDAXT PRODUCT ID	TOTAL LENGTH	UNV VOLTAGE	CONTROLS	HOUSING FINISH
SFLDAXT StencilFlex® AxisTrak™ Insert	4 4' 5 5' 6 6'	UNV universal	DPCV integral 48V driver 60W max. 0-10V dimming through two added contacts on AxisTrak™* DALIDT6CV integral 48V driver 60W max. DALI dimming through two added contacts on AxisTrak™*	BLK black W white
		Wired for 120V to determine power drops.	* Available with multicircuit wiring.	! Please be mindful of your Framework Color Selection when selecting your insert housing finish.

PRODUCT ID	TOTAL LENGTH	TOTAL LUMENS/FT	CRI	COLOR TEMP.	VOLTAGE	CONTROLS
SFLISL StencilFlex® Indirect SurroundLite Insert	5 5'* 6 6'	175 175 lm/ft 250 250 lm/ft 350 350 lm/ft 500 500 lm/ft 700 700 lm/ft 1000 1000 lm/ft	80 80 CRI 90 90 CRI	27 2700 K 30 3000 K 35 3500 K 40 4000 K	UNV universal	DP integral driver 0-10V dimming (1%) - wired DALIDT6 integral driver DALI 2.0 Type 6 - wired
		*2 feet lit segment.				

### Patented Design

Product design and development is an ongoing process at Axis Lighting. We reserve the right to change specifications. Contact Axis for the latest product information.