




Project _____

Type _____


Notes _____

TOP VIEW SHOWN

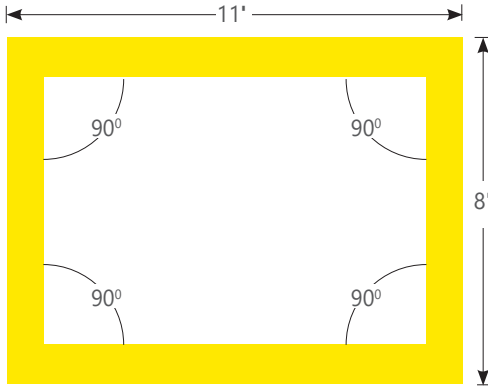


SCWPAT	REC	90+90+90+90	38'
PRODUCT ID	PATTERNS	CORNER ANGLE	LENGTH/FT

TOP VIEW - Rectangle Corner Pattern

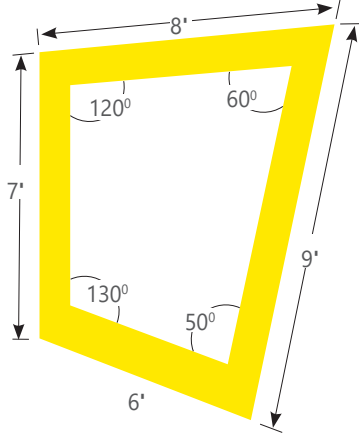

SCWPAT	ASO	120+60+50+130	30'
PRODUCT ID	PATTERNS	CORNER ANGLE	LENGTH/FT

TOP VIEW - Corner Pattern

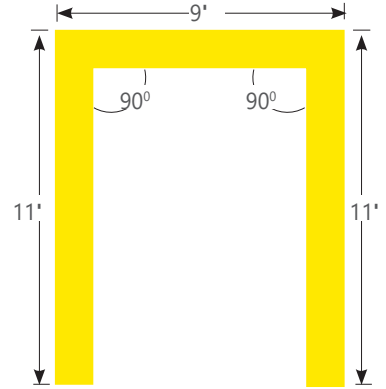

SCWPAT	OPR	90+90	31'
PRODUCT ID	PATTERNS	CORNER ANGLE	LENGTH/FT

TOP VIEW - Open Shape Corner Pattern

Ordering Guide

SCRPAT		PRODUCT ID	PATTERNS	CORNER ANGLE	NOM. LUMENS/FT UP (OPT.)	NOM. LUMENS/FT DOWN (OPT.)	CRI
SCWDPAT	Sculpt Wall Direct Patterns	SQ	square regular lit corners	90	300	300	80
SCWIPAT	Sculpt Wall Indirect Patterns	REC	rectangle regular lit corners	#	750	500	90
SCWDIPAT	Sculpt Wall Direct/Indirect Patterns	ASO	other shape regular lit corners				
		OPR	open shape regular lit corners				
		OPO	open shape outside lit corner				
		OPI	open shape inside lit corner				
		OPOI	open shape outside/inside lit corner				

Outputs between listed min and max are available. Consult factory for outputs outside of the listed range.

COLOR TEMP.	SHIELDING UP	SHIELDING DOWN	LENGTH/FT	SPECIFY LENGTH	FINISH	VOLTAGE
27 2700 K	NO No shielding *	FL flush	(L) total pattern length	NL nominal	AP aluminum paint	120 120 V
30 3000 K	SO spotless lens	0.5M 0.5" StepLens, lum. end cap		EX exact	W white	277 277 V
35 3500 K	BW batwing lens	0.5P 0.5" StepLens, opaque end cap			BLK black	347 347 V*
40 4000 K		2M 2" StepLens, lum. end cap*			C custom	UNV universal
		2P 2" StepLens, opaque end cap*				DC low voltage**
	* For Direct only	+BL(#) Blank (for flush option only)				
		All lens options use spotless lens				* D dimming (0-10V) 5% standard
		* Is not available with OPO, OPI and OPOI corner patterns.				** Only available with POE drivers.

DRIVER	CIRCUITS	BATTERY - REMOTE (OPT.)	OTHER (OPT.)	IC CONTROL (OPTIONAL)	CUSTOM
DP dimming (0-10V) 1%	1 1 circuit	B(#) remote battery pack	F fuse *	DS(#) daylight sensor *	C custom
D dimming (0-10V) 5% 347V standard*	2 2 circuits		FW(#) flex whip (6' std)	OS(#) occupancy sensor *	
LT lutron **	+E(#) emergency section*		CP Chicago plenum	DOS(#) daylight & occupancy sensor *	
BI bi-level dimming	+NL(#) night light section*			EN(#) Enlighted integral *	
O other ***	+GTD(#) generator transfer device*			ENR(#) Enlighted remote **	
POE(#) POE drivers**					
* For 347V only	* Specify quantity	Remote only; Please consult factory	* Requires 120V or 277V	* For flush option only; Please consult factory	Please specify
** Specify system				** Please consult factory	
*** Please consult factory; see page 2				For StepLens, please consult factory. Specify quantity. Requires 7" blank See pages 4-5 for more details	

● LIT CORNER FEATURES

The Lit Corner system allows continuous illumination all the way through the corner section



To optimize corner illumination, lit corners are created as integral components of the linear sections. Linear sections have mitered ends that connect to corresponding mitered ends of neighboring linear sections.

Illuminated Corners are more complex. Because the corner is fully illuminated, the corner is not independent of the straight sections, but integrated into the straight segment's housing. The corner is mitered, allowing a seamless line of light.



There are three types of illuminated corner available:

1. **Regular Illuminated Corner** - This is a fully illuminated 90 degree corner that lies in the same plane, for example, the ceiling or wall.
2. **Inside Illuminated Corner.** This corner runs up the wall, then across the ceiling. (Please use the "Inside & Outside lit corner patterns spec sheet" to specify and Inside lit corner).
3. **Outside Illuminated Corner** - This corner would run across a ceiling then up a bulkhead. (Please use the "Inside & Outside lit corner patterns spec sheet" to specify and Outside lit corner).


TIP: Provide sketches illustrating corner types and locations required.

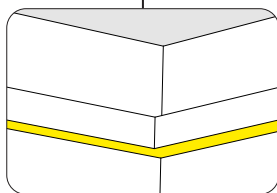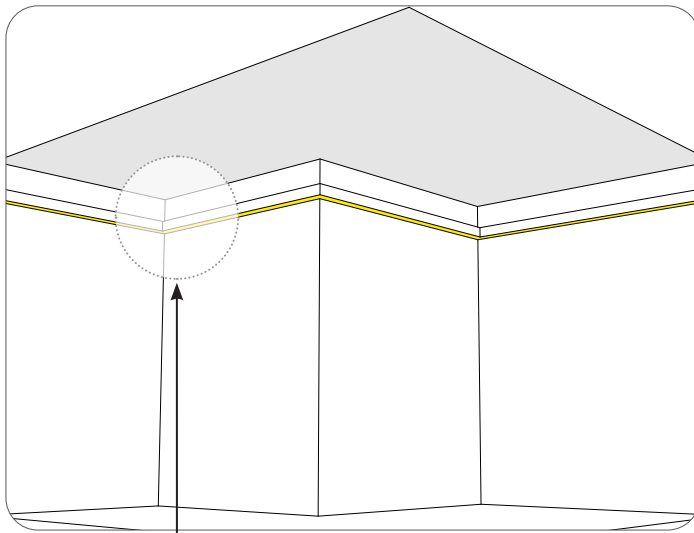

Open Shape Corner (OPR)

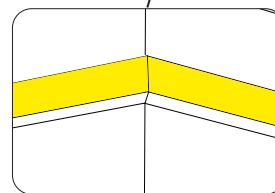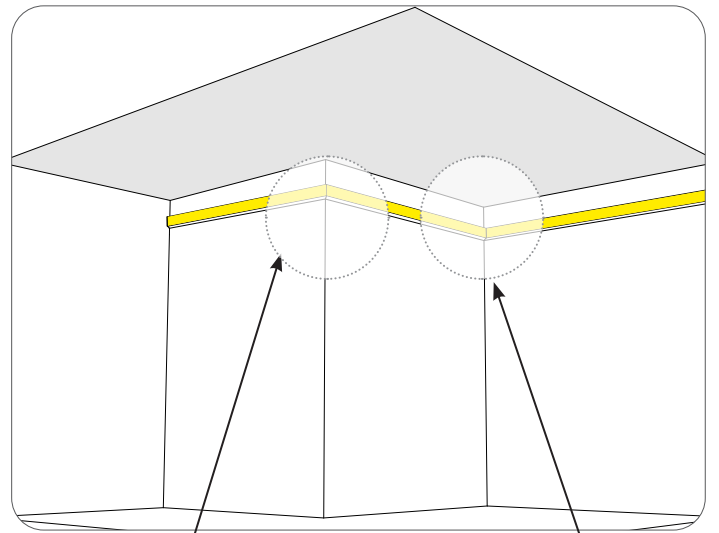

Outside lit Corner (OPO)

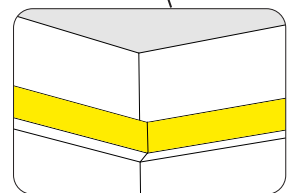

Inside lit Corner (OPI)