


Project _____

Type _____


Notes _____

*** Please see page 2 for example on how to specify various right angle patterns.**

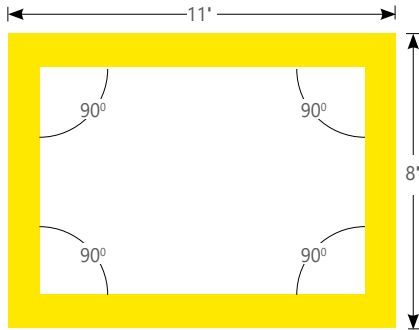


| | |
|------------|---------------------|
| TB2ILEDPAT | R (11'X8') |
| PRODUCT ID | PATTERNS AND LENGTH |

TOP VIEW - Rectangle Corner Pattern

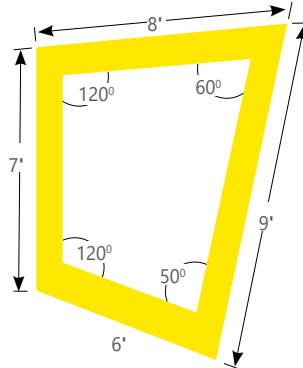

| | | |
|------------|---------------------|--------------------|
| TB2ILEDPAT | FF(30) | OPR(120+60+50+120) |
| PRODUCT ID | PATTERNS AND LENGTH | CORNER DEGREES |

TOP VIEW - Corner Pattern

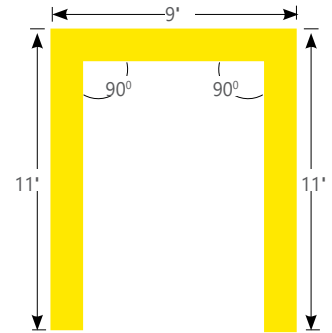

| | |
|------------|---------------------|
| TB2ILEDPAT | U (9'X11'X11') |
| PRODUCT ID | PATTERNS AND LENGTH |

TOP VIEW - Open Shape Corner Pattern

IMPORTANT! – all corner patterns must be submitted with drawings indicating dimensions and angles degree.

Ordering Guide

| PRODUCT ID | PATTERNS AND LENGTH (SELECT ONE) | CORNER DEGREES (OPT.) | LUMENS/FT INDIRECT | CRI | |
|------------|---|--|--|--|--------------------------------------|
| TB2ILEDPAT | Beam 2 Indirect | | | | |
| | S(L)* square shape (length) R(LxL)* rectangular shape (length) U(LxL)* U shape (length) L(LxL)* L shape (length) T(LxL)* T shape (length) X(LxLxL)* X shape (length) | FF(L) total pattern length FREE FORM for various angles. Minimum 2'. | OPR(#) regular lit corner degrees Specify for FF option only. Please confirm corner degrees. Min 30° | 300 300 lm/ft-Min 1100 1100 lm/ft-Max Outputs between listed min and max are available. Consult factory for outputs outside of the listed range. | 80 80 CRI 90 90 CRI |
| | *Comes in 90 degree only. | | | | |


| COLOUR TEMP. | SHIELDING INDIRECT | SPECIFY LENGTH | FINISH | VOLTAGE | DRIVER |
|--------------|-----------------------------|----------------|-------------------|------------------------------------|--|
| 27 2700 K | SO spotless lens | NL nominal | AP aluminum paint | 120 120V | DP dimming (0-10V) 1% |
| 35 3500 K | SL surroundlite | EX exact | W white | 277 277V | LT(#) Lutron * |
| 30 3000 K | SLA surroundlite asymmetric | | BLK black | 347 347V | BI bi-level dimming |
| 40 4000 K | 0.25G 0.25" Glo lens | | C custom | UNV universal | O(#) other ** |
| | BW batwing, flush only | | | DC low voltage* | POE(#) POE drivers* |
| | | | | * Only available with POE drivers. | * Specify system, see page 3. **Please consult factory; see page 3. |

| CIRCUITS | MOUNTING/SUSPENSION | BATTERY | OTHER | IC CONTROLS (OPTIONAL) | CUSTOM (OPTIONAL) |
|-------------------------------------|--|---|-------------------------|---|-------------------|
| 1 1 circuit | CA(#) drywall+cable length (36" std) | B(#) battery pack | F fuse * | DS(#) daylight sensor | C custom |
| 2 2 circuits | CT9(#) TB/TG 9/16+cable length (36" std.) | 4' sections | D dust cover | OS(#) occupancy sensor | |
| +E(#) emergency circuit * | CT15(#) TB/TG15/16+cable length (36" std.) | | | DOS(#) daylight & occupancy sensor | |
| +NL(#) night light circuit * | CTS(#) screw slot+cable length (36" std.) | | | EN(#) Enlighted integral * | |
| +GTD(#) generator transfer device * | SA(#) drywall+stem length>48 (18" std) | | | ENR(#) Enlighted remote * | |
| | CASL(#) drywall cable sloped ceiling | | | WC(#) wireless control dimming | |
| | SASL(#) drywall stem sloped ceiling | | | | |
| * Specify quantity | See Mounting kit guide for full specification code. Specify quantity | Requires 120V or 277V. Please consult factory | * Requires 120V or 277V | * Please consult factory. See integrated controls guide for more details. | Please specify |


How to Specify 90 degree Corners and Patterns

Example

Defining R - Rectangular shape

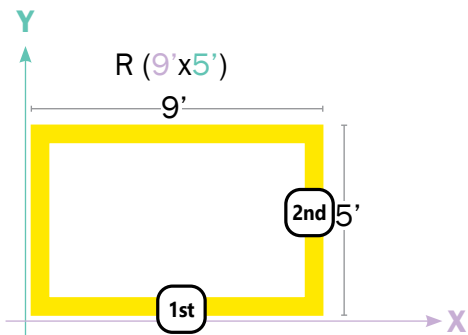


Defining L shape

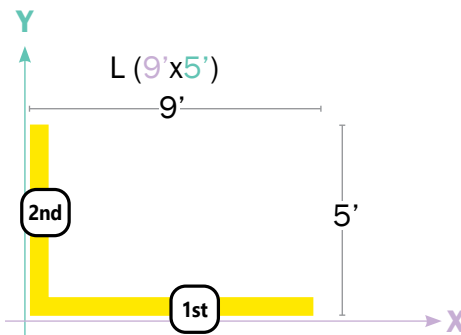


Note: The first number will always define the width, the second - the length.

Defining U shape

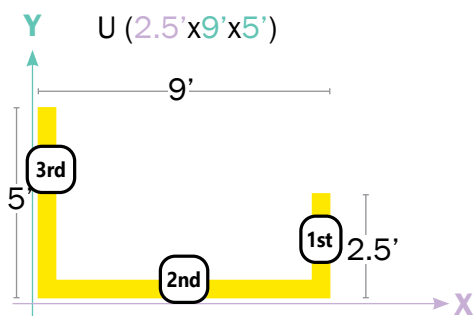


Note: The first number will always define the right arm length, the second - the width, and the third - the left arm length.

Defining T shape

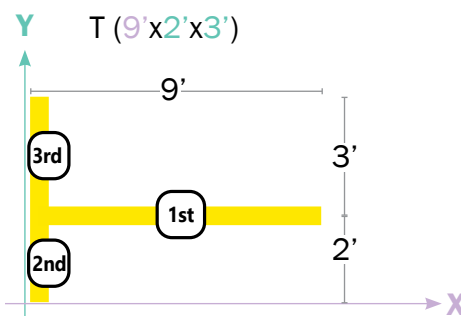


Note: The first number will always define the width, the second - the bottom arm length, and the third - the top arm length.

Defining S - Square shape

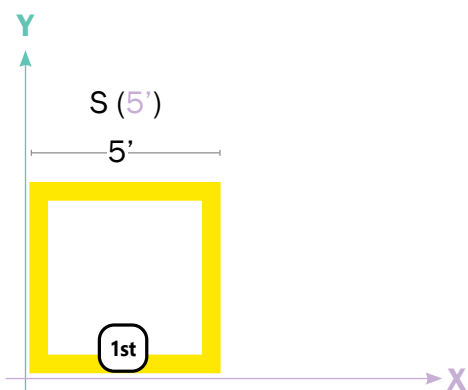

Note: The number will define the width. (All sides are the same length).

Defining X shape

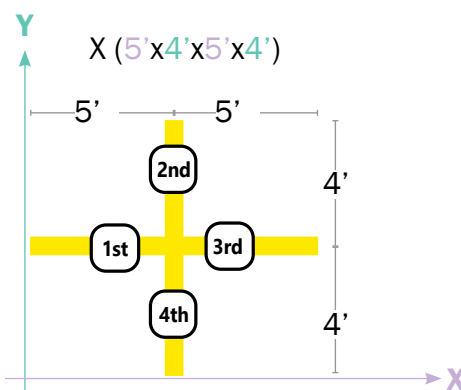

Note: The first number will define length of the left arm, the second - the arm length to the right from the first, and so on until the 4th arm.

● LIT CORNER FEATURES


The Lit Corner system allows continuous illumination all the way through the corner section

To optimize corner illumination, lit corners are created as integral components of the linear sections. Linear sections have mitered ends that connect to corresponding mitered ends of neighboring linear sections.

Illuminated Corners are more complex. Because the corner is fully illuminated, the corner is not independent of the straight sections, but integrated into the straight segment's housing. The corner is mitered, allowing a seamless line of light.

Regular Illuminated Corner - A fully illuminated corner that lies on the same plane, for example, the ceiling. There are two corner options available for Regular Lit Corners: **Open Shape Corner** and **Closed Shape Corner**

TIP: Provide sketches illustrating corner types and locations required.

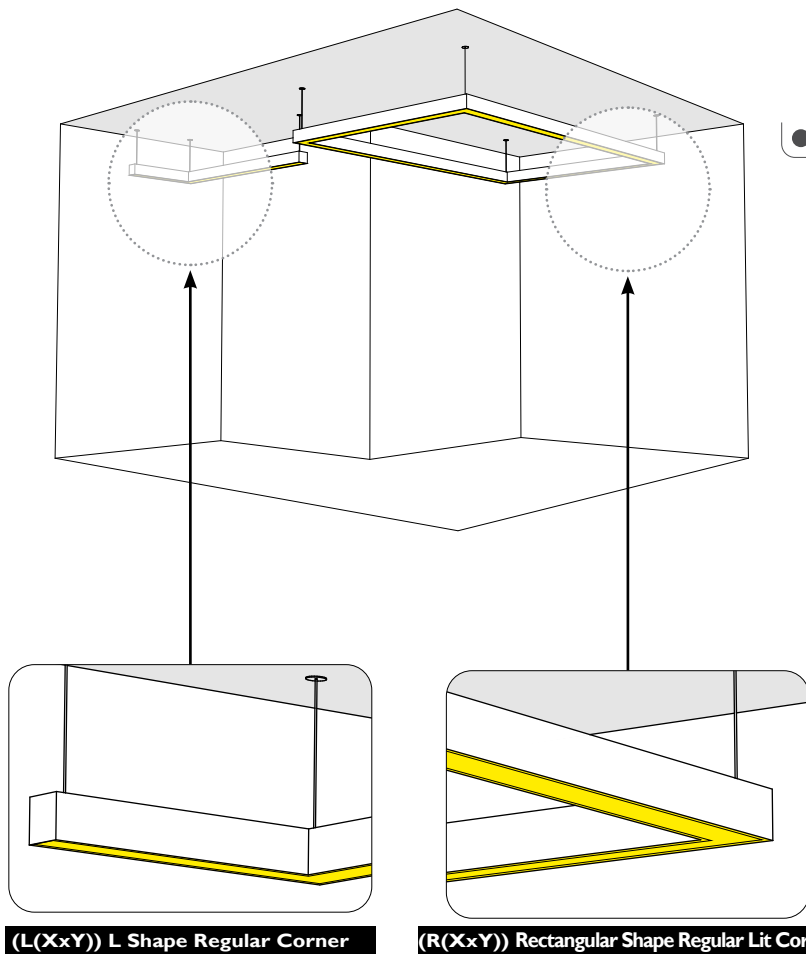

(L(XxY)) L Shape Regular Corner

(R(XxY)) Rectangular Shape Regular Lit Corner

● ELECTRICAL

Lutron driver* LDE1 - Hi-lume 1% EcoSystem with Soft-on, Fade-to-Black
LTEA - Hi-lume 1% 2-wire (120V forward phase only)
*Consult factory

Other drivers DALI - Digital Addressable Lighting Interface
DMX - Digital Multiplex
Xitanium SR - For wireless sensor

Power over Ethernet MOLEX
POE drivers* IGOR
(consult factory for more information) SMARTENGINE
O - Other (Consult factory)

UL2108 certified for integral or remote driver
Emergency Integral emergency battery pack or emergency circuit optional.

Input Voltage 120V, 277V, 347V, UNV.

i Incorporating these components may have limitations or affect the length of the luminaire. Please contact factory for more details.

● LED SYSTEM

CRI Minimum 80 or 90 color rendering index.

CCT Choice of 2700K, 3000K, 3500K and 4000K color temperature with a great color consistency (within 3-step MacAdam ellipse). Both within fixture and fixture to fixture.

LED life Minimum 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements.

Thermal Management Aluminum housing acting as the heat sink to maximize life.

Environment Dry and damp rated in operating ambient temperatures of 0-40°C (32-104F).

● WARRANTY

Axis Lighting will warrant defective LEDs, boards, and drivers for 5 years from date of purchase. Warranty is valid if luminaire is installed and used according to specifications. If defective, Axis will send replacement boards or drivers at no cost along with detailed replacement instructions and instructions on how to return defective components to Axis.

IMPORTANT – all corner patterns must be submitted with drawings indicating dimensions and angles degree.

