



(F) Flat - (OC) Outside Corner



Outside Corner  
(OC)




Inside Corner  
(IC)



(F) Flat - (IC) Inside Corner

**NOTE:** See page 3 for more orientation information.

### Ordering Example

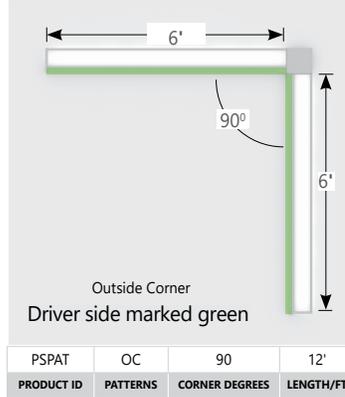

Outside Corner  
Driver side marked green

TOP VIEW - Square Corner Pattern

**NOTE:** See page 2 for more ordering examples

Project \_\_\_\_\_

Type \_\_\_\_\_

Notes \_\_\_\_\_

**Please provide sketch  
See page 3 for orientation options**

**IMPORTANT – Must submit sketches to illustrate the pattern, mounting location, and luminaire lengths..**




### Ordering Guide

PSPAT					SF						
PRODUCT ID	MOUNTING SIDE	CORNER TYPE		CORNER ANGLE	OPTIC-STEP SIDE	OPTIC-FLAT SIDE					
PSPAT	Pose corners wall	F	flat	OC	outside corner	90	90 degree	AS	asymmetric - step side	SF	solid - flat side
		IC	inside corner			LS			lambertian - step side		
For wall mount, open pattern, only on one plane						See light distribution options on page 3.					

NOM. LUMENS/FT	CRI	COLOR TEMP.	LENGTH	FINISH	VOLTAGE	DRIVER							
250	250 lm/ft - Min	80	80 CRI	27	2700 K	2	2'	AP	aluminum paint	120	120 V	DP	dimming (0-10V) 1% - integral
1000	1000 lm/ft - Max	90	90 CRI	30	3000 K	3	3'	W	white	277	277 V	POE(#)	POE drivers*
				35	3500 K	4	4'	BLK	black	347	347 V*		
				40	4000 K	5	5'	UNV	universal				
						6	6'	DC	low voltage**				
						7	7'						
						8	8'						
						S(L)	system run*						
Outputs between listed min and max are available. Consult factory for outputs outside of the listed range.		Consult factory for other color temperatures		2 ft min, 1 ft increment, 8 ft max stand alone. *System runs contain joiners - see page 3 For all other lengths and related outputs, please consult factory.						* Remote driver only. ** Only available with POE drivers.		Integral driver * Please consult factory; see page 2	


CIRCUITS	MOUNTING	ORIENTATION	REMOTE BATTERY (OPTIONAL)	OTHER (OPTIONAL)	CUSTOM (OPTIONAL)
1 1 circuit 2 2 circuits* +E(#) emergency circuit*	MT mounting track* DF drywall flange DS drywall spackle flange	FWOC flat wall outside corner FWIC flat wall inside corner	BR(#) remote battery pack	EF end feed	C custom
* Specify quantity * Can not control up/down separately.	*For drywall and solid ceiling mounting. Please consult factory for power feed options available for your ceiling type and application.	*See page 3 for orientation options	Remote only	Not available with flex whip wiring.	Please specify

● **ORDERING EXAMPLES**

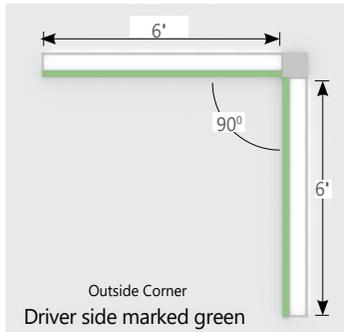

PSPAT	OC	90	12'
PRODUCT ID	PATTERNS	CORNER DEGREES	LENGTH/FT

FRONT VIEW - L Corner Pattern

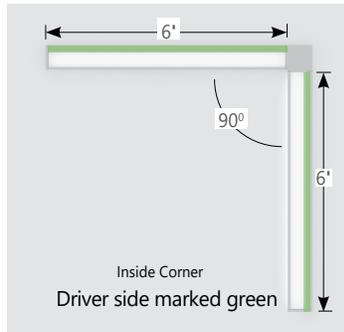

PSPAT	IC	90	12'
PRODUCT ID	PATTERNS	CORNER DEGREES	LENGTH/FT

FRONT VIEW - L Corner Pattern

● **CORNER FEATURES**


The corner system allows Pose™ to be built into L-shaped patterns.

A non-illuminated corner element easily joins individual lengths of Pose™ luminaires for a seamless look.

Choose the Wall Right Angle mount to connect luminaires from wall to wall, with either an inside or outside corner. Or build L-shaped patterns on a single wall surface with Wall Flat mount or Wall Step mount.


**IMPORTANT:** Provide sketches to illustrate the pattern, mounting location, and luminaire lengths.

Step - Wall mount shown

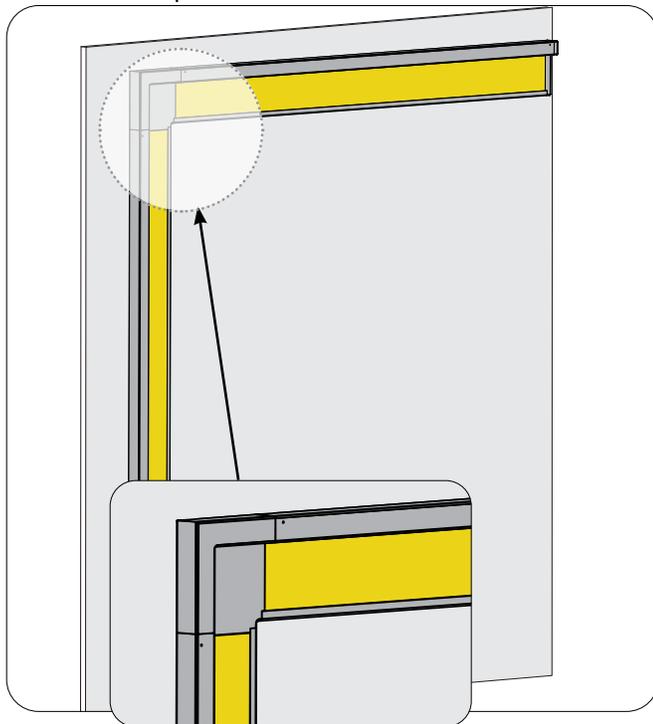

**Inside Corner (IC)**


Step - Wall mount shown

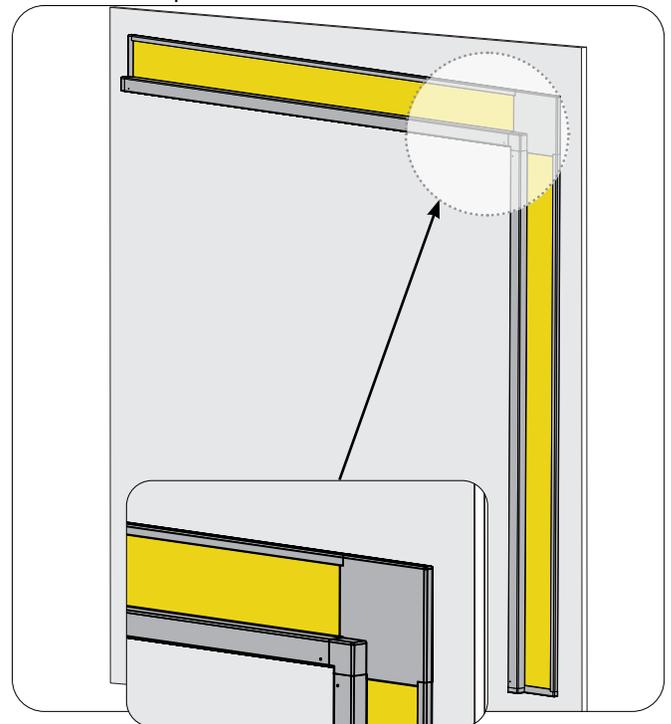



**Outside Corner (OC)**

### ● ORIENTATION OPTIONS

#### MOUNTING SIDE

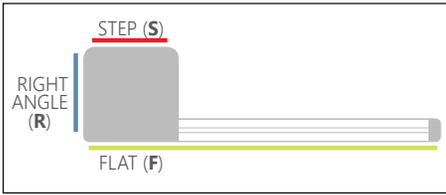

Pose™ is available for installation on all three of its sides. See interactive table below for quick access to CORNER - STEP, and RIGHT ANGLE MOUNTS specification sheets, also available at [axislighting.com](http://axislighting.com)

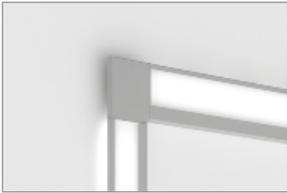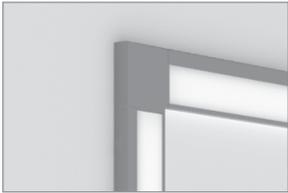	WALL			
	OUTSIDE CORNERS		INSIDE CORNERS	
<b>FLAT MOUNT (F)</b> (solid (SF) always on the flat side)  <b>NOTE:</b> Applicable only for same plane patterns	 Flat Wall Outside Corner <b>FWOC</b>		 Flat Wall Inside Corner <b>FWIC</b>	
<b>RIGHT ANGLE MOUNT (R)</b>  <b>NOTE:</b> Not applicable for same plane patterns	 Right Angle Wall Outside Corner Up <b>RWOCU</b>	 Right Angle Wall Outside Corner Down <b>RWOCD</b>	 Right Angle Wall Inside Corner Up <b>RWICU</b>	 Right Angle Wall Inside Corner Down <b>RWICD</b>
<b>STEP MOUNT (S)</b> (recommend lambertian (LS) on the step side)  <b>NOTE:</b> Applicable only for same plane patterns	 Step Wall Outside Corner <b>SWOC</b>		 Step Wall Inside Corner <b>SWIC</b>	

#### LIGHT DISTRIBUTION

		lambertian on step side <b>LUMENS % 100%</b>  solid on flat side <b>0%</b>		asymmetric on step side <b>LUMENS % 100%</b>  solid on flat side <b>0%</b>

**IMPORTANT – Must submit sketches to illustrate the pattern, mounting location, and luminaire lengths..**

