




Project _____

Type _____


Notes _____

*** Please see page 2 for example on how to specify various right angle patterns.**

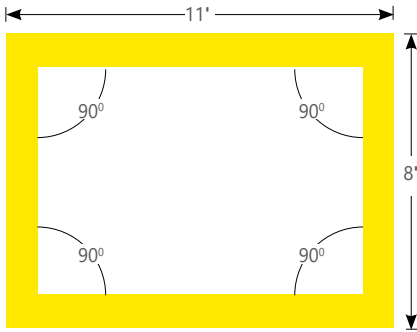


SCDIPAT	R (11'X8')
PRODUCT ID	PATTERNS AND LENGTH

TOP VIEW - Rectangle Corner Pattern

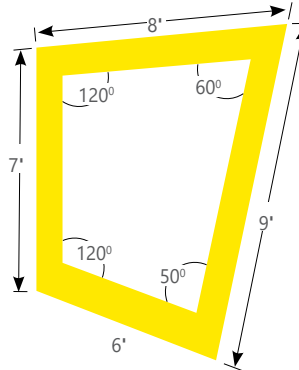

SCDIPAT	FF(30)	OPR(120+60+50+120)
PRODUCT ID	PATTERNS AND LENGTH	CORNER DEGREES

TOP VIEW - Corner Pattern



SCDIPAT	U (11'X9'X11')
PRODUCT ID	PATTERNS AND LENGTH

TOP VIEW - Open Shape Corner Pattern

IMPORTANT! – all corner patterns must be submitted with drawings indicating dimensions and angles degree.

Ordering Guide

SCDIPAT	PRODUCT ID	PATTERNS (SELECT ONE)	CORNER DEGREES(OPT.)	NOM. LUMENS/FT UP	NOM. LUMENS/FT DOWN
SCDIPAT	Sculpt Pendant Direct/Indirect Patterns	S(L)* square shape (length) R(LxL)* rectangular shape (length) U(LxLxL)* U shape (length) L(LxL)* L shape (length) T(LxLxL)* T shape (length) X(LxLxLxL)* X shape (length)	FF(L) total pattern length OPR(#) regular lit corner degrees	300 300 lm/ft - Min. 1000 1000 lm/ft - Max.	300 300 lm/ft - Min. 500 500 lm/ft - Max.
		*Comes in 90 degree only OPR corners.	FREE FORM for various angles. Minimum 2"	Specify for FF option only. Please confirm corner degrees. 45° minimum.	Outputs between listed min and max are available. Consult factory for outputs outside of the listed range.


CRI	COLOR TEMP.	SHIELDING UP	SHIELDING DOWN	SPECIFY LENGTH	FINISH	VOLTAGE	DRIVER
80 80 CRI	27 2700 K	SO spotless lens	FL flush	NL nominal	AP aluminum paint	120 120 V	DP dimming (0-10V) 1%
90 90 CRI	30 3000 K	BW batwing lens	RG 0.5" regressed	EX exact	W white	277 277 V	LT lutron
	35 3500 K		0.5M 0.5" StepLens, lum. end cap		BLK black	347 347 V	BI bi-level dimming
	40 4000 K		0.5P 0.5" StepLens, opaque end cap		C custom	UNV universal	O(#) other **
			2M 2" StepLens, lum. end cap			DC low voltage*	POE(#) POE drivers*
			2P 2" StepLens, opaque end cap				
			ASO asymmetric flush lens				
			+BL(#) Blank (for flush option only)				
			All lens options use spotless lens			* Only available with POE drivers.	* Specify system ** Please consult factory; see page 3

CIRCUITS	MOUNTING	BATTERY (OPTIONAL)	IC CONTROL (OPTIONAL)	CUSTOM
1 1 circuit 2 2 circuits +E(#) emergency section * +NL(#) night light section * +GTD(#) generator transfer device *	CA(#) drywall+cable length (36" std.) CT9(#) TB/TG 9/16+cable length (36" std.) CT15(#) TB/TG15/16+cable length (36" std.) CTS(#) screw slot+cable length (36" std.) SA(#) drywall+stem length >48" (18" std.) CASL(#) drywall cable sloped ceiling SASL(#) drywall stem sloped ceiling +SM seismic kit	B(#) battery pack Remote, 5 feet linear length minimum required for integral battery; Please consult factory	DS(#) daylight sensor * OS(#) occupancy sensor * DOS(#) daylight & occupancy sensor * EN(#) Enlighted integral * ENR(#) Enlighted remote **	C custom Please specify
* Specify quantity	See Mounting kit guide for full specification code. Specify length		* For flush option only; Please consult factory * Please consult factory For StepLens, please consult factory Specify quantity. Requires 7" blank See IC controls guide for more details.	

How to Specify 90 degree Corners and Patterns


Example

Defining R - Rectangular shape

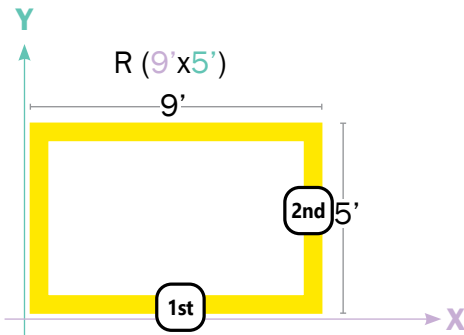


Note: The first number will always define the width, the second - the length.

Defining L shape

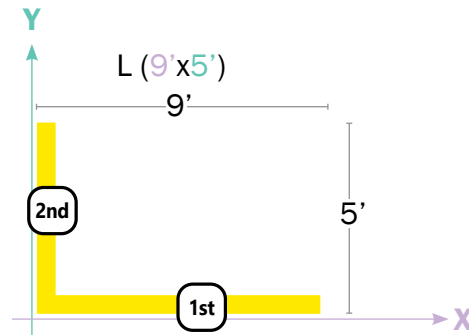


Defining U shape

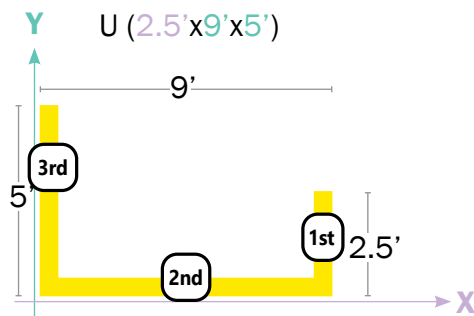


Note: The first number will always define the right arm length, the second - the width, and the third - the left arm length.

Defining T shape

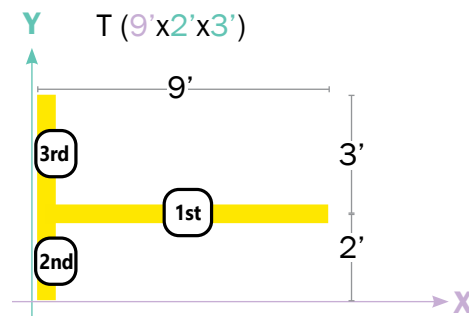


Note: The first number will always define the width, the second - the bottom arm length, and the third - the top arm length.

Defining S - Square shape

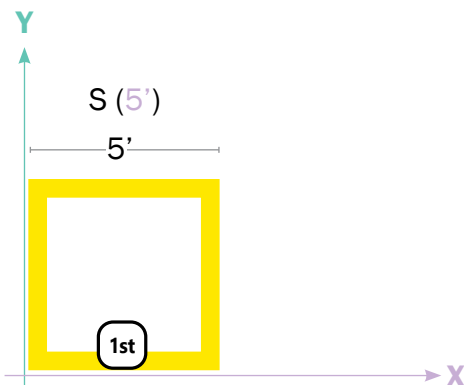

Note: The number will define the width. (All sides are the same length).

Defining X shape

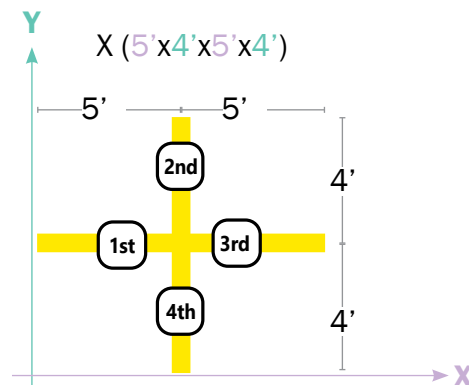

Note: The first number will define length of the left arm, the second - the arm length to the right from the first, and so on until the 4th arm.

LIT CORNER FEATURES

The Lit Corner system allows continuous illumination all the way through the corner section


To optimize corner illumination, lit corners are created as integral components of the linear sections. Linear sections have mitered ends that connect to corresponding mitered ends of neighboring linear sections.

Illuminated Corners are more complex. Because the corner is fully illuminated, the corner is not independent of the straight sections, but integrated into the straight segment's housing. The corner is mitered, allowing a seamless line of light.

There are three types of illuminated corner available:

Regular Illuminated Corner - This is a fully illuminated 90 degree corner that lies in the same plane, for example, the ceiling or wall.

TIP: Provide sketches illustrating corner types and locations required.

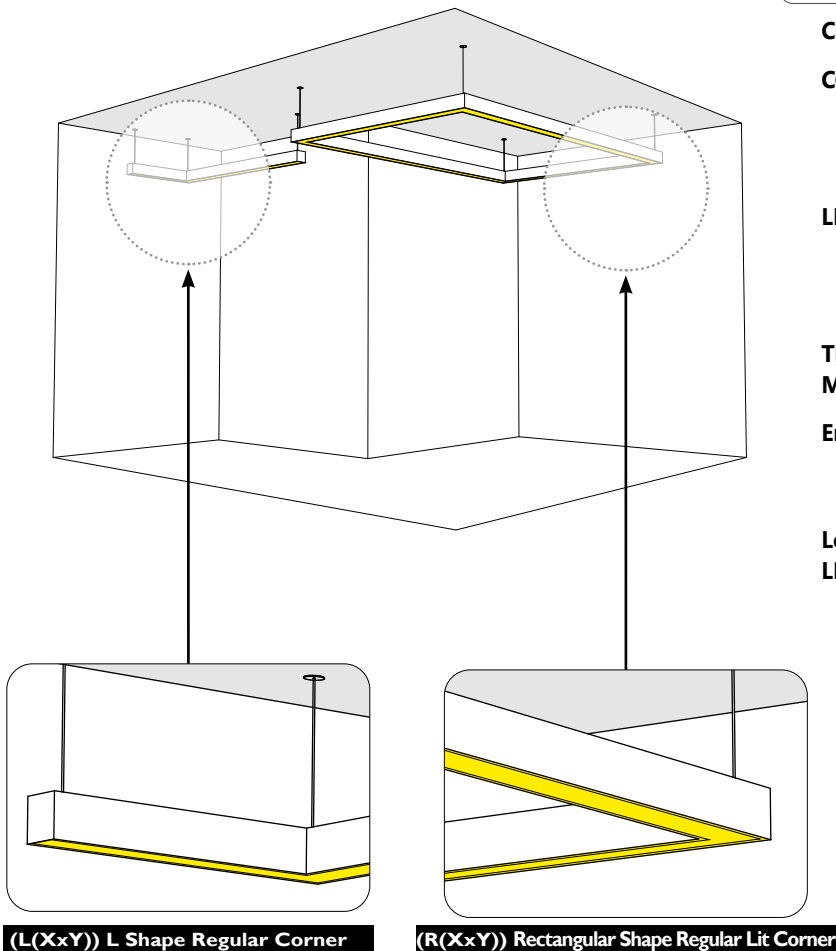

(L(XxY)) L Shape Regular Corner

(R(XxY)) Rectangular Shape Regular Lit Corner

ELECTRICAL

Lutron driver LDE1 - Hi-lume 1% EcoSystem with Soft-on, Fade-to-Black

Other drivers DALI - Digital Addressable Lighting Interface
DMX - Digital Multiplex
Xitanium SR - For wireless sensor

Power over Ethernet POE drivers* (consult factory for more information)
MOLEX
IGOR
SMARTENGINE
O - Other (Consult factory)

UL2108 certified for integral or remote driver
Emergency

Integral emergency battery pack or emergency circuit optional.

Input Voltage 120V, 277V, 347V, UNV.

i Incorporating these components may have limitations or affect the length of the luminaire. Please contact factory for more details.

LED SYSTEM

CRI Minimum 80 or 90 color rendering index.

CCT Choice of 2700K, 3000K, 3500K and 4000K color temperature with a great color consistency (within 3-step MacAdam ellipse). Both within fixture and fixture to fixture.

LED life Minimum 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements.

Thermal Management Aluminum housing acting as the heat sink to maximize life.

Environment Dry and damp rated for indoor use only in operating ambient temperatures of 0-40°C (32-104°F).

Louver LED Individual LED cluster in each louver cell.

WARRANTY

Limited 5-year warranty is available. Warranty is valid provided luminaires are installed and used according to specifications. For full terms and conditions, please consult warranty section at axislighting.com.