

Project \_\_\_\_\_

Type \_\_\_\_\_

Notes \_\_\_\_\_

**A configuration drawing is required**

Factory is available for assistance



\* See page 3 for more information.



### Ordering Guide

\* 8" height shown. Other heights available, see details on page 2.

SSZU									
PRODUCT ID	TOTAL LENGTH	HEIGHT	FINISH	MOUNTING/SUSPENSION	CANOPY	CUSTOM (OPT.)			
SSZU Spatial SoftZone Unlit Linear	2' 2 feet - MIN 7' 7 feet - MAX S(L) system run	8" 8 inches 12" 12 inches 18" 18 inches 24" 24 inches 36" 36 inches	AP aluminum paint W white BLK black C(#) custom*	CA(#) drywall+cable length (36" std.) CT9(#) TB/TG 9/16+cable length (36" std.) CT15(#) TB/TG15/16+cable length (36" std.) CTS(#) screw slot+cable length (36" std.) CASL(#) drywall cable sloped ceiling	RC round canopy SC square canopy	C custom			
2' minimum length, up to 7'. Inch increments possible, please consult factory		* To match your housing finish with selected standard panel colors see suggested codes on page 3.		See Mounting kit guide for full specification code. Specify length	White canopy standard	Please specify			

SOFTZONE PANEL COLOR ID			
STANDARD PALETTE		EXTENDED CUSTOM PALETTE *	
COT	cotton	CUSFRO	frost
TIN	tin	CUSDEN	denim
CON	concrete	CUSNAV	navy
SLA	slate	CUSPEB	pebble
CAR	carbon	CUSSMO	smoke
SAN	sand	CUSAPP	apple green
COR	cork	CUSOLI	olive
COP	copper	CUSEME	emerald
BAR	bark	CUSANC	anchor
EAR	earth	CUSSHA	shadow
PUR	purple	CUSWHE	wheat
OCE	ocean	CUSSAC	sand castle
LEM	lemon	CUSLEA	leather
LIM	lime	CUSPER	peru
BRI	brick	CUSMOS	moss
		CUSMAR	marble
		CUSMOC	moccasin
		CUSGIN	ginger ale
		CUSASP	asphalt
		CUSFOS	fossil
		CUSCRI	crimson
		CUSMAN	maroon
		CUSFIR	fire brick
		CUSIND	indigo
		CUSBUR	burnt orange

See page 3 for more details.

\* Extended custom color palette panels available per request. Consult factory for details.

### Spatial SofZone® linear heights and segment lengths






36" Height

24" Height

18" Height

12" Height





8" Height

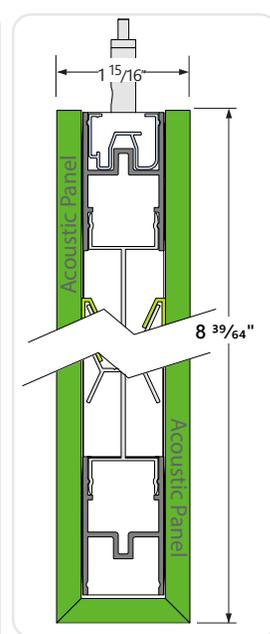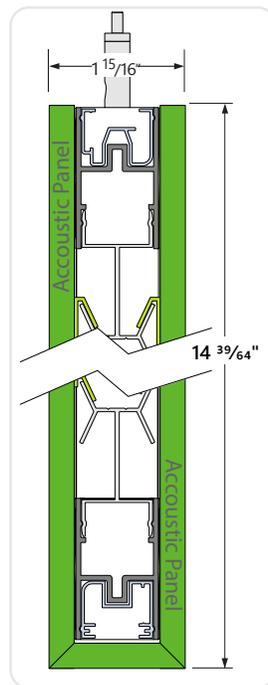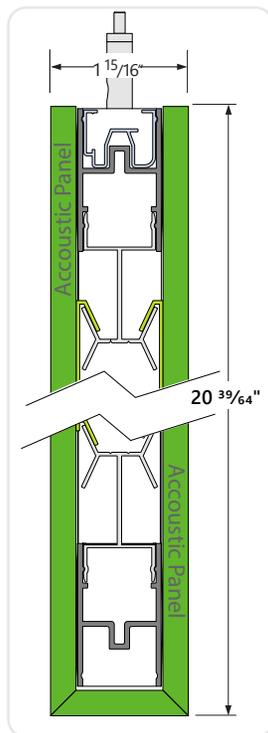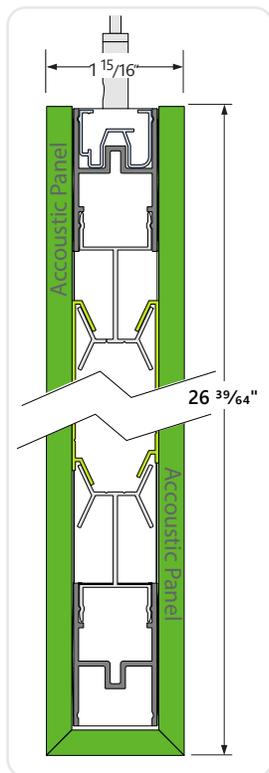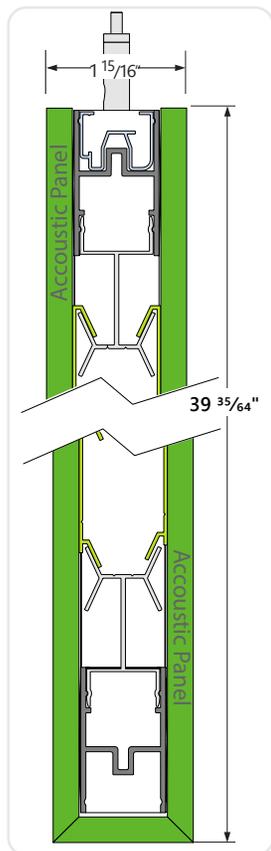

**\*For lit options, please consult SSZ Spec Sheet.**


### SOFTZONE PANEL COLOR PALETTE

#### WITH MATCHING HOUSING COLORS

 Cotton (COT)	 Tin (TIN)	 Concrete (CON)	 Slate (SLA)	 Carbon (CAR)
 C(RAL9003) Matte	 C(RAL7047) Glossy	 C(RAL7042) Matte	 C(RAL7043) Matte	 C(RAL9005) Matte
 Sand (SAN)	 Cork (COR)	 Copper (COP)	 Bark (BAR)	 Earth (EAR)
 C(HS512H1107 1872-L)	 C(RAL1011) Glossy	 C(RAL8001) Glossy	 C(RAL8003) Glossy	 C(RAL7006) Glossy
 Purple (PUR)	 Ocean (OCE)	 Lemon (LEM)	 Lime (LIM)	 Brick (BRI)
 C(RAL4005) Glossy	 C(RAL5023) Glossy	 C(RAL1023) Matte	 C(PMS369C/ KD1139 -u/ P5541G868)	 C(RAL4002) Glossy

### EXTENDED SOFTZONE PANEL COLOR PALETTE

Available per request. Consult factory for details.

 Frost (CUSFRO)	 Denim (CUSDEN)	 Navy (CUSNAV)	 Pebble (CUSPEB)	 Smoke (CUSSMO)
 Apple Green (CUSAPP)	 Olive (CUSOLI)	 Emerald (CUSEME)	 Anchor (CUSANC)	 Shadow (CUSSHA)
 Wheat (CUSWHE)	 Sand Castle (CUSSAC)	 Leather (CUSLEA)	 Peru (CUSPER)	 Moss (CUSMOS)
 Marble (CUSMAR)	 Moccasin (CUSMOC)	 Ginger Ale (CUSGIN)	 Asphalt (CUSASP)	 Fossil (CUSFOS)
 Crimson (CUSCRI)	 Maroon (CUSMAN)	 Fire Brick (CUSFIR)	 Indigo (CUSIND)	 Burnt Orange (CUSBUR)

#### ● CLEANING PROTOCOL



**NOTE:** Easy to clean. Made from polyester fill with natural anti-microbial properties.



Periodic dusting with vacuum or dry cloth recommended.



For stain removal, use a small amount of soap or detergent on a wet cloth.



For added disinfection, use bleach solution (5 tablespoons per Gallon of water), spray onto surface and gently wipe to spread all over.

#### ● CONSTRUCTION

<b>Housing</b>	Extruded aluminum (0.070" nominal)
<b>End Cap+Joiner</b>	Die cast aluminum
<b>Suspension</b>	1 mm Aircraft cable
<b>Cable Grips</b>	Quick Connecting / Release

#### ● FIXTURE FINISH

Powder coated and custom finishes are also available.

#### ● APPROVALS



Certified to UL and CSA standards.   
Suitable for damp locations.

**FIRE SAFETY:** Class A Fire Rated as per ASTM E84.  
Flame Spread Index: 5  
Smoke Development Index: 110

#### ● WARRANTY

Limited 5-year warranty is available. Warranty is valid provided luminaires are installed and used according to specifications. For full terms and conditions, please consult warranty section at [axislighting.com](http://axislighting.com).

#### ● SOFTZONE® WARRANTY

All SoftZone® Acoustic panels are guaranteed for 1 year (warranty period) from date of shipment from our factory. Defective products will be repaired or replaced at the discretion of Axis Lighting provided a written claim is made within the warranty period.

##### **Exclusions of SoftZone® Warranty:**

- Normal wear and tear (scratches, direct sunlight, etc.).
- Products that have been modified, improperly installed, used in conditions or for purposes other than which they were intended.