

* 8" height shown. Other heights available, see details on page 2.

Project _____

Type _____

Notes _____



* See page 4 for more information.



Ordering Guide


SSZUSF									
PRODUCT ID	SHAPE	SEGMENT LENGTH	HEIGHT	FINISH	MOUNTING/SUSPENSION	CANOPY	CUSTOM (OPT.)		
SSZUSF Spatial SoftZone Unlit Standard Forms	L90 "L" shape 90 degrees	2' 2 feet	8" 8 inches*	AP aluminum paint	CA(#) drywall+ cable length (36" std.)	RC round canopy	C custom		
	SQ90 square shape	3' 3 feet	12" 12 inches*	W white	CT9(#) TB/TG 9/16+ cable length (36" std.)	SC square canopy			
	X90 "X" shape 90 degrees		18" 18 inches*	BLK black	CT15(#) TB/TG15/16+ cable length (36" std.)				
	T90 "T" shape 90 degrees		24" 24 inches	C(#) custom*	CTS(#) screw slot+ cable length (36" std.)				
	Y120 "Y" shape 120 degrees		36" 36 inches		CASL(#) drywall cable sloped ceiling				
	Y135 "Y" shape 135 degrees								
	V120 "V" shape 120 degrees								
	V135 "V" shape 135 degrees								
	Z120 "Z" shape 120 degrees								
	Z135 "Z" shape 135 degrees								
	X120 "X" shape 120 degrees								
				* To match your housing finish with selected standard panel colors see suggested codes on page 4.	See Mounting kit guide for full specification code. Specify length	White canopy standard	Please specify		

SOFTZONE PANEL COLOR ID			
STANDARD PALETTE		EXTENDED CUSTOM PALETTE *	
COT cotton		CUSFRO frost	
TIN tin		CUSDEN denim	
CON concrete		CUSNAV navy	
SLA slate		CUSPEB pebble	
CAR carbon		CUSSMO smoke	
SAN sand		CUSAPP apple green	
COR cork		CUSOLI olive	
COP copper		CUSEME emerald	
BAR bark		CUSANC anchor	
EAR earth		CUSSHA shadow	
PUR purple		CUSWHE wheat	
OCE ocean		CUSSAC sand castle	
LEM lemon		CUSLEA leather	
LIM lime		CUSPER peru	
BRI brick		CUSMOS moss	
		CUSMAR marble	
		CUSMOC moccasin	
		CUSGIN ginger ale	
		CUSASP asphalt	
		CUSFOS fossil	
		CUSCRI crimson	
		CUSMAN maroon	
		CUSFIR fire brick	
		CUSIND indigo	
		CUSBUR burnt orange	

See page 4 for more details.


* Extended custom color palette panels available per request. Consult factory for details.

Spatial SofZone® standard forms heights and segment lengths

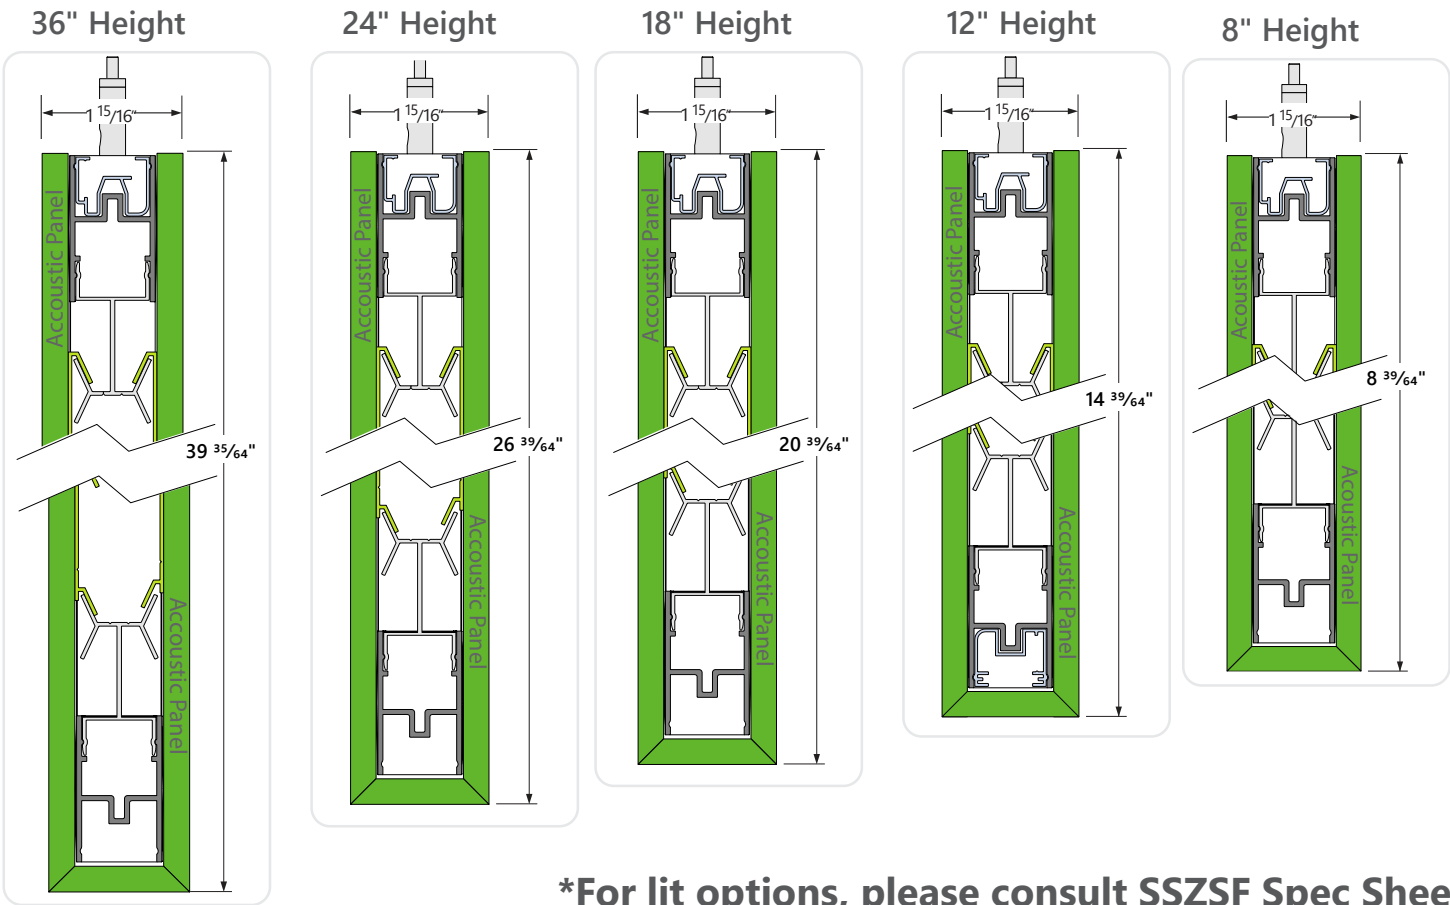


Available standard Spatial Forms with Dimensions (2 ft segments shown)


Bottom views




L90 - L Shape 90°




SQ90 - Square shape 90°

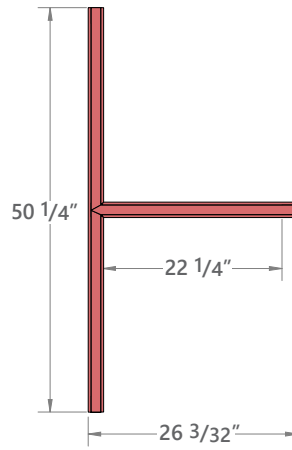


T90 - T shape 90°

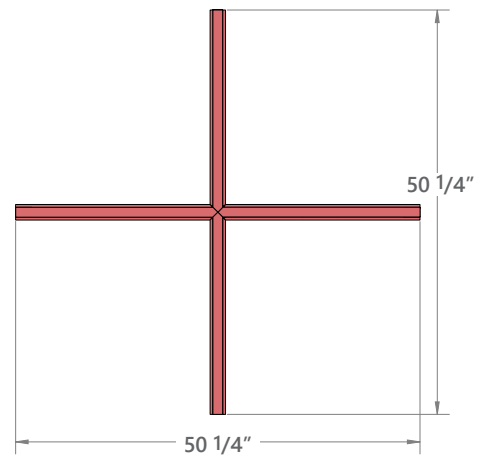


X90 - X shape 90°

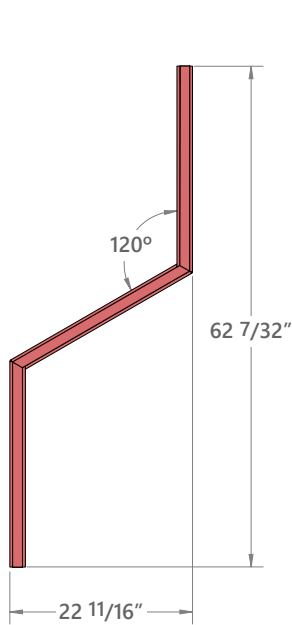


Z120 - Z shape 120°

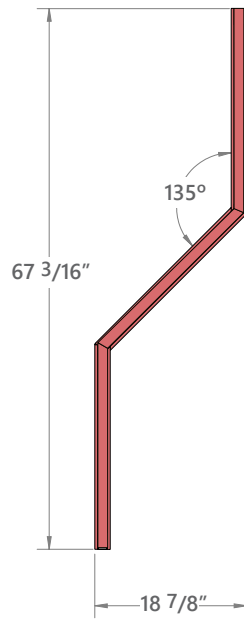


Z135 - Z shape 135°

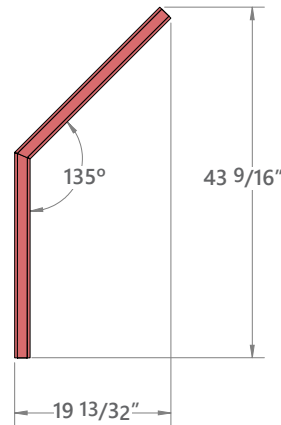


V135 - V shape 135°

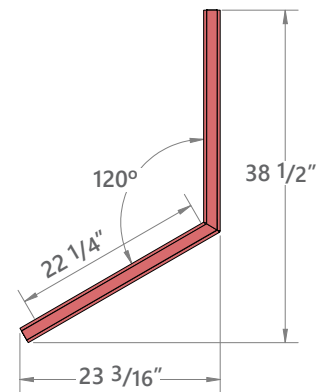


V120 - V shape 120°

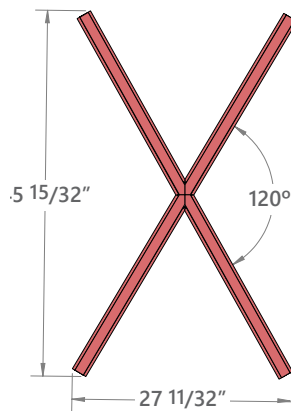

X120 - X shape 120°

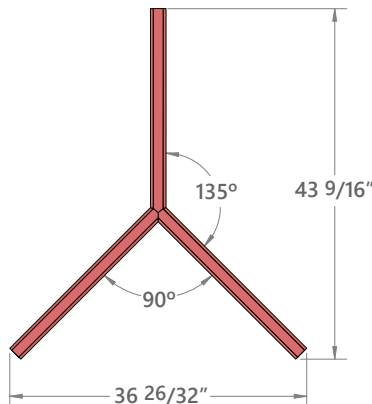








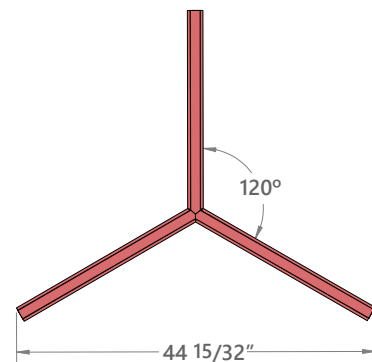







Y135 - Y shape 135°



Y120 - Y shape 120°

SOFTZONE PANEL COLOR PALETTE

WITH MATCHING HOUSING COLORS

Cotton (COT)	Tin (TIN)	Concrete (CON)	Slate (SLA)	Carbon (CAR)
				
C(RAL9003) Matte	C(RAL7047) Glossy	C(RAL7042) Matte	C(RAL7043) Matte	C(RAL9005) Matte
Sand (SAN)	Cork (COR)	Copper (COP)	Bark (BAR)	Earth (EAR)
				
C(HS512H1107 1872-L)	C(RAL1011) Glossy	C(RAL8001) Glossy	C(RAL8003) Glossy	C(RAL7006) Glossy
Purple (PUR)	Ocean (OCE)	Lemon (LEM)	Lime (LIM)	Brick (BRI)
				
C(RAL4005) Glossy	C(RAL5023) Glossy	C(RAL1023) Matte	C(PMS369C/ KD1139 -u/ PS541G868)	C(RAL4002) Glossy

EXTENDED SOFTZONE PANEL COLOR PALETTE

Available per request. Consult factory for details.

				
Frost (CUSFRO)	Denim (CUSDEN)	Navy (CUSNAV)	Pebble (CUSPEB)	Smoke (CUSSMO)
				
Apple Green (CUSAPP)	Olive (CUSOLI)	Emerald (CUSEME)	Anchor (CUSANC)	Shadow (CUSSHA)
				
Wheat (CUSWHE)	Sand Castle (CUSSAC)	Leather (CUSLEA)	Peru (CUSPER)	Moss (CUSMOS)
				
Marble (CUSMAR)	Moccasin (CUSMOC)	Ginger Ale (CUSGIN)	Asphalt (CUSASP)	Fossil (CUSFOS)
				
Crimson (CUSCRI)	Maroon (CUSMAN)	Fire Brick (CUSFIR)	Indigo (CUSIND)	Burnt Orange (CUSBUR)

CLEANING PROTOCOL



NOTE: Easy to clean. Made from polyester fill with natural anti-microbial properties.



Periodic dusting with vacuum or dry cloth recommended.



For stain removal, use a small amount of soap or detergent on a wet cloth.



For added disinfection, use bleach solution (5 tablespoons per Gallon of water), spray onto surface and gently wipe to spread all over.

CONSTRUCTION


Housing	Extruded aluminum (0.070" nominal)
End Cap+Joiner	Die cast aluminum
Suspension	1 mm Aircraft cable
Cable Grips	Quick Connecting / Release

FIXTURE FINISH

Powder coated and custom finishes are also available.

APPROVALS



Certified to UL and CSA standards. 
Suitable for damp locations.

FIRE SAFETY: Class A Fire Rated as per ASTM E84.
Flame Spread Index: 5
Smoke Development Index: 110

WARRANTY

Limited 5-year warranty is available. Warranty is valid provided luminaires are installed and used according to specifications. For full terms and conditions, please consult warranty section at axislighting.com.

SOFTZONE® WARRANTY

All SoftZone® Acoustic panels are guaranteed for 1 year (warranty period) from date of shipment from our factory. Defective products will be repaired or replaced at the discretion of Axis Lighting provided a written claim is made within the warranty period.

Exclusions of SoftZone® Warranty:

- Normal wear and tear (scratches, direct sunlight, etc.).
- Products that have been modified, improperly installed, used in conditions or for purposes other than which they were intended.