

Project _____

Type _____

Notes _____

A configuration drawing is required

Factory is available for assistance



* See page 3 for more information.



Ordering Guide

* 8" height shown. Other heights available, see details on page 2.


SSZUCF																	
PRODUCT ID		SHAPE		SEGMENT LENGTH		TOTAL LENGTH		HEIGHT		FINISH		MOUNTING/SUSPENSION		CANOPY		CUSTOM (OPT.)	
SSZUCF	Spatial SoftZone Unlit Continuous Forms	ZZ120	zigzag shape 120 degrees	2'	2 feet - MIN	L	total length	8"	8 inches	AP	aluminum paint	CA(#)	drywall+cable length (36" std.)	RC	round canopy	C	custom
		ZZ135	zigzag shape 135 degrees	7'	7 feet - MAX			12"	12 inches	W	white	CT9(#)	TB/TG 9/16+cable length (36" std.)	SC	square canopy		
		SWT90	saw tooth shape 90 degrees					18"	18 inches	BLK	black	CT15(#)	TB/TG15/16+cable length (36" std.)				
								24"	24 inches	C(#)	custom*	CTS(#)	screw slot+cable length (36" std.)				
								36"	36 inches			CASL(#)	drywall cable sloped ceiling				
		See page 2 for more information.		2' minimum length, up to 7'. Inch increments possible, please consult factory						* To match your housing finish with selected standard panel colors see suggested codes on page 3.		See Mounting kit guide for full specification code . Specify length		White canopy standard		Please specify	

SOFTZONE PANEL COLOR ID					
STANDARD PALETTE			EXTENDED CUSTOM PALETTE *		
COT	cotton		CUSFRO	frost	
TIN	tin		CUSDEN	denim	
CON	concrete		CUSNAV	navy	
SLA	slate		CUSPEB	pebble	
CAR	carbon		CUSSMO	smoke	
SAN	sand		CUSAPP	apple green	
COR	cork		CUSOLI	olive	
COP	copper		CUSEME	emerald	
BAR	bark		CUSANC	anchor	
EAR	earth		CUSSHA	shadow	
PUR	purple		CUSWHE	wheat	
OCE	ocean		CUSSAC	sand castle	
LEM	lemon		CUSLEA	leather	
LIM	lime		CUSPER	peru	
BRI	brick		CUSMOS	moss	
			CUSMAR	marble	
			CUSMOC	moccasin	
			CUSGIN	ginger ale	
			CUSASP	asphalt	
			CUSFOS	fossil	
			CUSCRI	crimson	
			CUSMAN	maroon	
			CUSFIR	fire brick	
			CUSIND	indigo	
			CUSBUR	burnt orange	

See page 3 for more details.


* Extended custom color palette panels available per request. Consult factory for details.

Spatial SofZone® standard heights and segment lengths

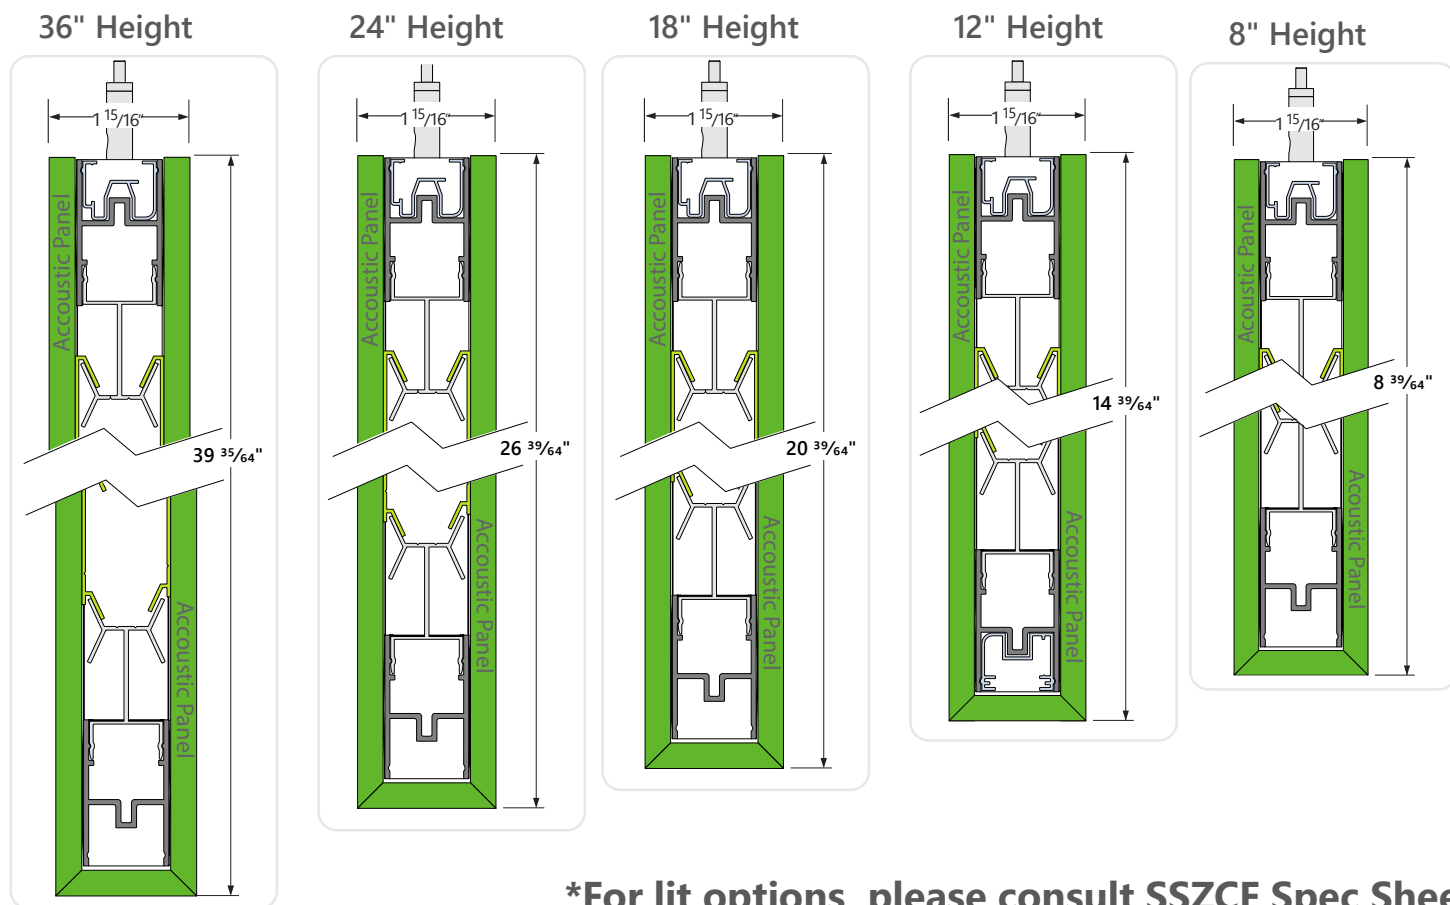


● SHAPES

Zigzag

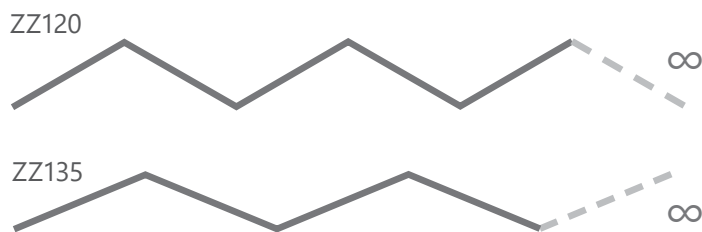








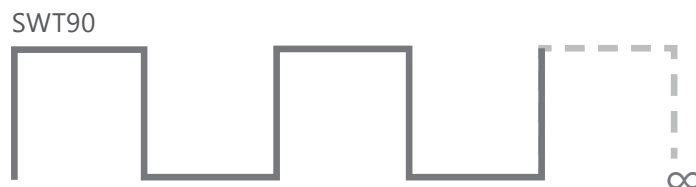







Sawtooth



SOFTZONE PANEL COLOR PALETTE

WITH MATCHING HOUSING COLORS

Cotton (COT)	Tin (TIN)	Concrete (CON)	Slate (SLA)	Carbon (CAR)
				
C(RAL9003) Matte	C(RAL7047) Glossy	C(RAL7042) Matte	C(RAL7043) Matte	C(RAL9005) Matte
Sand (SAN)	Cork (COR)	Copper (COP)	Bark (BAR)	Earth (EAR)
				
C(HS512H1107 1872-L)	C(RAL1011) Glossy	C(RAL8001) Glossy	C(RAL8003) Glossy	C(RAL7006) Glossy
Purple (PUR)	Ocean (OCE)	Lemon (LEM)	Lime (LIM)	Brick (BRI)
				
C(RAL4005) Glossy	C(RAL5023) Glossy	C(RAL1023) Matte	C(PMS369C/ KD1139 -u/ PS541G868)	C(RAL4002) Glossy

EXTENDED SOFTZONE PANEL COLOR PALETTE

Available per request. Consult factory for details.

				
Frost (CUSFRO)	Denim (CUSDEN)	Navy (CUSNAV)	Pebble (CUSPEB)	Smoke (CUSSMO)
				
Apple Green (CUSAPP)	Olive (CUSOLI)	Emerald (CUSEME)	Anchor (CUSANC)	Shadow (CUSSHA)
				
Wheat (CUSWHE)	Sand Castle (CUSSAC)	Leather (CUSLEA)	Peru (CUSPER)	Moss (CUSMOS)
				
Marble (CUSMAR)	Moccasin (CUSMOC)	Ginger Ale (CUSGIN)	Asphalt (CUSASP)	Fossil (CUSFOS)
				
Crimson (CUSCRI)	Maroon (CUSMAN)	Fire Brick (CUSFIR)	Indigo (CUSIND)	Burnt Orange (CUSBUR)

● CLEANING PROTOCOL

NOTE: Easy to clean. Made from polyester fill with natural anti-microbial properties.



Periodic dusting with vacuum or dry cloth recommended.



For stain removal, use a small amount of soap or detergent on a wet cloth.



For added disinfection, use bleach solution (5 tablespoons per Gallon of water), spray onto surface and gently wipe to spread all over.


● CONSTRUCTION

Housing	Extruded aluminum (0.070" nominal)
End Cap+Joiner	Die cast aluminum
Suspension	1 mm Aircraft cable
Cable Grips	Quick Connecting / Release

● FIXTURE FINISH

Powder coated and custom finishes are also available.

● APPROVALS

Certified to UL and CSA standards. 
Suitable for damp locations.

FIRE SAFETY: Class A Fire Rated as per ASTM E84.
Flame Spread Index: 5
Smoke Development Index: 110

● WARRANTY

Limited 5-year warranty is available. Warranty is valid provided luminaires are installed and used according to specifications. For full terms and conditions, please consult warranty section at axislighting.com.

● SOFTZONE® WARRANTY

All SoftZone® Acoustic panels are guaranteed for 1 year (warranty period) from date of shipment from our factory. Defective products will be repaired or replaced at the discretion of Axis Lighting provided a written claim is made within the warranty period.

Exclusions of SoftZone® Warranty:

- Normal wear and tear (scratches, direct sunlight, etc.).
- Products that have been modified, improperly installed, used in conditions or for purposes other than which they were intended.