



Flush





2" Regressed

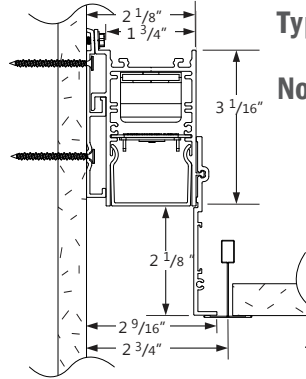

Project _____

Type _____

Notes _____

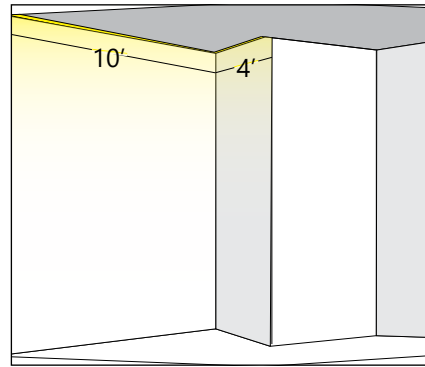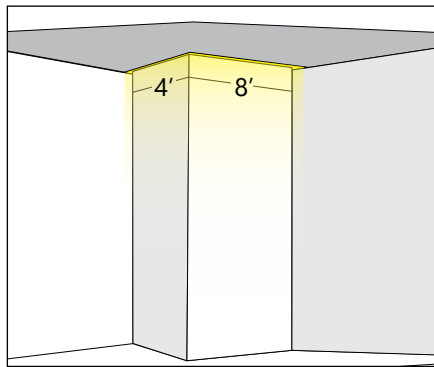

SCPLEDPAT	OPRO(1)	12'
PRODUCT ID	LINEAR OR CORNER QTY	TOTAL LENGTH

3D VIEW - Outside Corner Pattern

SCPLEDPAT	OPRI(1)	14'
PRODUCT ID	LINEAR OR CORNER QTY	TOTAL LENGTH

3D VIEW - Inside Corner Pattern



Ordering Guide

SCPLEDPAT	PRODUCT ID	CORNER QUANTITY	NOM. LUMENS/FT	CRI	COLOR TEMP. (choose one)	SHIELDING
SCPLEDPAT	Sculpt Perimeter LED Pattern	OPRO(1) open shape recessed outside lit corner +OPRI(1) open shape recessed inside lit corner	300 300 lm/ft - Minimum 1000 1000 lm/ft - Maximum	80 80 CRI 90 90 CRI	27 2700 K 30 3000 K 35 3500 K 40 4000 K	FL flush RG2 regressed 2"
			Outputs between listed min and max are available. Consult factory for outputs outside of the listed range.			

LINEAR LENGTH	FINISH	VOLTAGE	DRIVER	CIRCUITS	MOUNTING
# 2 ft - 12 ft continuous length S(L) System Run	W white C custom	120 120 V 277 277 V 347 347 V UNV universal	DP dimming (0-10V) 1% LT Lutron BI bi-level dimming O(1) other **	1 1 circuit 2 2 circuits +E(1) emergency circuit * +NL(1) night light section * +GTD(1) generator transfer device *	TB9 t-bar 9/16" TB15 t-bar 15/16" ST screw slot t-bar TG9 tegular 9/16" TG15 tegular 15/16" DS drywall spackle flange DF drywall flange
SCULPT accommodates any length. Metric lengths also available, please consult factory.			* Specify system ** Please consult factory; see page 2	* Specify quantity	

BATTERY (OPTIONAL)	POWER FEED (OPTIONAL)	OTHER (OPTIONAL)	CUSTOM (OPTIONAL)
B# battery pack 4' sections	EF end feed	+FW flex whip (6' std)* +CP Chicago plenum	C custom
Not available with 347V Please consult factory	See page 2 for more details	* Other lengths available; please consult factory.	Please specify

LED SYSTEM

CRI	Minimum 80 or 90 color rendering index
CCT	Choice of 2700K, 3000K, 3500K and 4000K color temperature with a great color consistency (within 3.0-step MacAdam ellipse).
LED life	Minimum 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements.
Thermal Management	Aluminum housing acting as the heat sink to maximize life.

CONSTRUCTION

Housing	Extruded aluminum (0.080" nominal) up to
End Cap	Die cast aluminum
Interior Brackets	Die formed sheet steel (20 gauge)
Lenses	Extruded acrylic (0.060" nominal) - injection moulded
Hanger	Die cast aluminum
Suspension	Sliding aircraft cable along product length
Cable Grips	Quick connecting / release

ELECTRICAL


Lutron driver	LDE1 - EcoSystem H-Series (1%)
Other drivers	DALI - Digital Addressable Lighting Interface DMX - Digital Multiplex Xitanium SR - For wireless sensor
Emergency	remote emergency battery pack or emergency circuit optional.
Input Voltage	120V, 277V, 347V, UNV.

i Incorporating these components may have limitations or affect the length of the luminaire. Please contact factory for more details.

WARRANTY

Limited 5-year warranty is available. Warranty is valid provided luminaires are installed and used according to specifications. For full terms and conditions, please consult warranty section at axislighting.com.

SHIELDING - Frosted acrylic Spotless lens



FL flush




RG2 regressed 2"

FINISH


Powder coated and custom finishes are also available.

FIXED SECTION




FS FIXED SECTIONS

POWER FEED



TF TOP FEED
standard



EF END FEED
optional


WEIGHT

Recessed 4 ft	8 lbs / 3.6 kg
Recessed 8 ft	16 lbs / 7.3 kg
Recessed 12 ft	24 lbs / 10.9 kg

JOINERS


In order to allow very long runs of SCULPT luminaires, Axis has developed an effective joining system. Special care has been taken to maximize the performance of the joiner for each SCULPT option.

NOTE: Mount each system segment individually. Do not assemble system prior to mounting.




i Allow a minimum of 6" between end of long runs and vertical wall


APPROVALS

Certified to UL and CUL standards 
Meets CCEC requirements (Chicago plenum)
Suitable for damp locations.
IC Rated (Insulated ceiling)


● TB CEILING MOUNTING OPTIONS

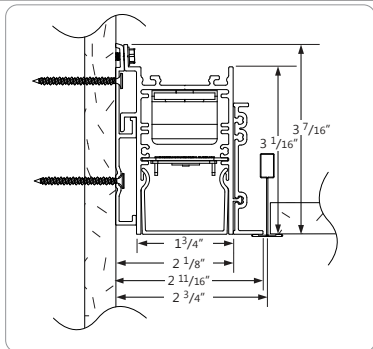


TB9 9/16" T-BAR

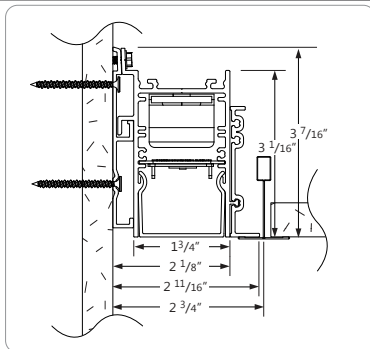

TB15 15/16" T-BAR

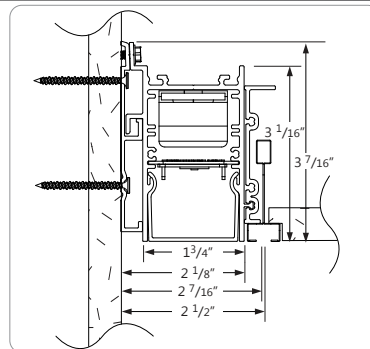


ST SCREW SLOT T-BAR

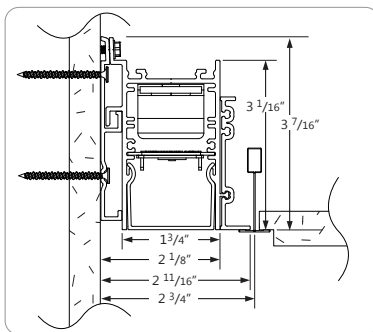


TG9 TEGULAR 9/16"

i Shown with flush shielding

● DRYWALL CEILING MOUNTING OPTIONS

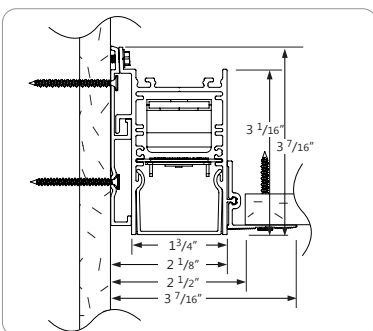


DS SPACKLE FLANGES

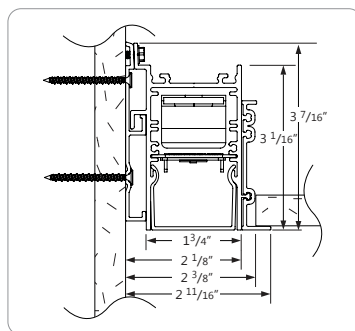


**DF VISIBLE FLANGES
WALL MOUNTING**

i Shown with flush shielding


● INSTALLATION GUIDE

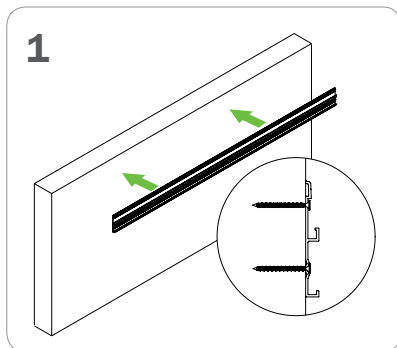

Install wall track level and secure to structure at small grooves in extrusion.

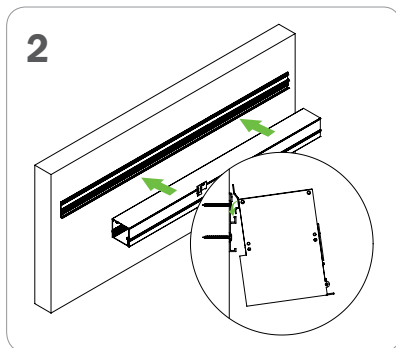

Hook Perimeter luminaire onto wall track.

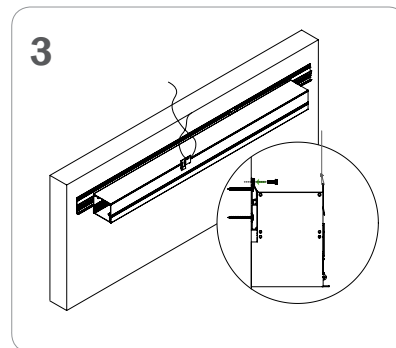


Secure to wall track, secure to structure.

● PHOTOMETRIC DATA (ADDITIONAL IES FILES AVAILABLE ON WEBSITE)

500 lm/ft linear with Flush lens



PHOTOMETRIC CURVE

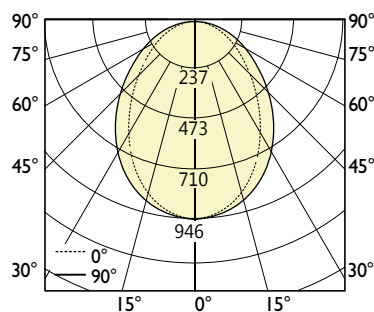

Lumen/ft down: 501 lm/ft
Total Lumens: 2004 lm (for 4ft)
Input Watts: 22.2 W
Efficacy: 90 lm/W

80 CRI shown. For 90 CRI, divide wattage by 0.8 and multiply efficacy by 0.8.

IES FILE:SCR-500-80-35-F-4-W-UNV-D-1.IES

TESTED ACCORDING TO IES LM-79-2008

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles				
	0	22.5	45	67.5	90
0	943	943	943	943	943
5	932	938	934	938	940
15	884	887	872	860	859
25	788	780	750	723	715
35	656	641	599	559	544
45	508	491	446	408	392
55	361	346	310	279	266
65	227	216	193	174	167
75	110	105	96	88	86
85	21	21	23	24	23
90	0	1	3	4	4

ZONAL LUMENS

Zone	Lumens
0	
0-10	89
10-20	245
20-30	345
30-40	375
40-50	346
50-60	280
60-70	194
70-80	103
80-90	27
90	1

LUMINANCE DATA (cd/m²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	14871	13045	11453
55	13026	11161	9585
65	11088	9429	8163
75	8767	7698	6843
85	4868	5504	5504

i All IES files are available for download at: www.axislighting.com