
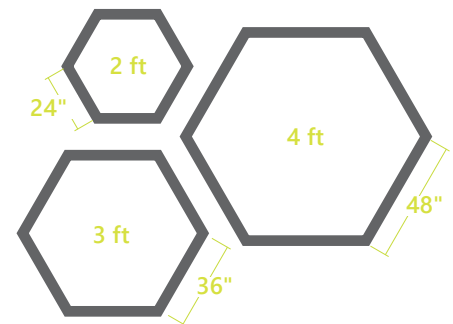


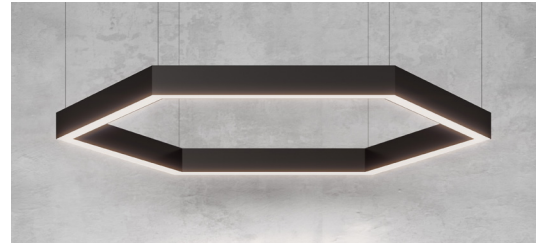

## Ordering Guide (fill out green boxes to complete code)

| SCDPAT     |                               |                       | OPR(120,6)                |                                                        |                                                                                                               |                          |    |        |
|------------|-------------------------------|-----------------------|---------------------------|--------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|--------------------------|----|--------|
| PRODUCT ID |                               | PATTERNS (SELECT ONE) | CORNER ID (degrees, qty.) |                                                        | NOM. LUMENS/FT                                                                                                | CRI                      |    |        |
| SCDPAT     | Sculpt Hexagon Pendant Direct | H2                    | 2 feet segments           | OPR(120,6)<br>regular lit corner degrees<br>quantity 6 | 300                                                                                                           | 300 lm/ft - Min.         | 80 | 80 CRI |
|            |                               | H3                    | 3 feet segments           |                                                        | 900                                                                                                           | 900 lm/ft - 90 CRI Max.  | 90 | 90 CRI |
|            |                               | H4                    | 4 feet segments           |                                                        | 1000                                                                                                          | 1000 lm/ft - 80 CRI Max. |    |        |
|            |                               |                       |                           |                                                        | Outputs between listed min and max are available.<br>Consult factory for outputs outside of the listed range. |                          |    |        |

| COLOR TEMP. |        | SHIELDING                          |                | NL |         | FINISH         |                | VOLTAGE                            |              | DRIVER           |                                        |
|-------------|--------|------------------------------------|----------------|----|---------|----------------|----------------|------------------------------------|--------------|------------------|----------------------------------------|
| 27          | 2700 K | FL                                 | flush          | NL | nominal | W              | white          | 120                                | 120 V        | DP               | dimming (0-10V) 1%                     |
| 30          | 3000 K | RG                                 | 0.5" regressed |    |         | BLK            | black          | 277                                | 277 V        | BI               | bi-level dimming                       |
| 35          | 3500 K |                                    |                |    |         | RAL(#)         | pick your RAL* | 347                                | 347 V        | O(DALI)          | Digital Addressable Lighting Interface |
| 40          | 4000 K |                                    |                |    |         | C(#)           | custom         | UNV                                | universal    | O(DMX)           | Digital Multiplex                      |
|             |        |                                    |                |    |         |                |                | DC                                 | low voltage* | O(XSR)           | Xitanium SR for wireless sensor        |
|             |        |                                    |                |    |         |                |                |                                    |              | POE(MOLEX)       | POE Molex driver                       |
|             |        |                                    |                |    |         |                |                |                                    |              | POE(IGOR)        | POE IGOR driver                        |
|             |        |                                    |                |    |         |                |                |                                    |              | POE(SMARTENGINE) | POE Smartengine driver                 |
|             |        | All lens options use spotless lens |                |    |         | * Specify RAL# |                | * Only available with POE drivers. |              | * Specify system |                                        |

| CIRCUITS           |                             | MOUNTING                                                                          |                                     | BATTERY - REMOTE (OPTIONAL)         |                     |
|--------------------|-----------------------------|-----------------------------------------------------------------------------------|-------------------------------------|-------------------------------------|---------------------|
| 1                  | 1 circuit                   | CA(L)                                                                             | drywall+cable length (36" std.)*    | B(#)                                | remote battery pack |
| 2                  | 2 circuits                  | CT9(L)                                                                            | TB/TG 9/16+cable length (36" std.)* |                                     |                     |
| +E(#)              | emergency section *         | CT15(L)                                                                           | TB/TG15/16+cable length (36" std.)* |                                     |                     |
| +NL(#)             | night light section *       | CTS(L)                                                                            | screw slot+cable length (36" std.)* |                                     |                     |
| +GTD(#)            | generator transfer device * | CASL(L)                                                                           | drywall cable sloped ceiling*       |                                     |                     |
|                    |                             | +SM                                                                               | seismic kit                         |                                     |                     |
| * Specify quantity |                             | See Mounting kit guide for full specification code.<br>*Specify length in inches. |                                     | Remote only; Please consult factory |                     |

