


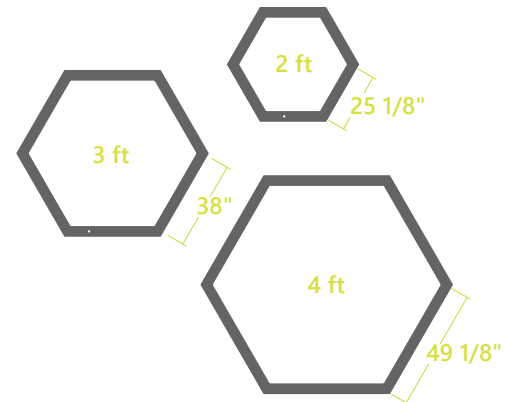

Ordering Guide (fill out green boxes to complete code)

STFDI		SLI		DSO		BH(6)	
PRODUCT ID	TOTAL LENGTH (FT)	SHIELDING UP	NOM. LUMENS/FT UP	SHIELDING DOWN	NOM. LUMENS/FT DOWN	HUB QUANTITY SERIES B	CRI
STFDI Stencil Hexagon Pendant DI	H2 2 feet segments H3 3 feet segments H4 4 feet segments	SLI SurroundLite indirect	175 175 lm/ft 250 250 lm/ft 350 350 lm/ft 500 500 lm/ft 700 700 lm/ft 1000 1000 lm/ft	DSO direct spotless lens	200 200 lm/ft 300 300 lm/ft 400 400 lm/ft	BH(#) Hex Hub (120°)	80 80 CRI 90 90 CRI
							Applies to both Up and Down

COLOR TEMP.	FINISH	VOLTAGE	REMOTE DRIVER	CIRCUITS	MOUNTING/SUSPENSION
27 2700 K * 30 3000 K 35 3500 K 40 4000 K	BLK black W white RAL(#) pick your RAL* C(#) custom	120 120 V 277 277 V UNV universal DC low voltage**	DP dimming (0-10V) 1% - remote only BI bi-level dimming O(DALI) Digital Addressable Lighting Interface O(DMX) Digital Multiplex O(XSR) Xitanium SR for wireless sensor POE(MOLEX) POE Molex driver POE(IGOR) POE IGOR driver POE(SMARTENGINE) POE Smartengine driver	1 1 circuit 2 2 circuits +E(#) emergency circuit*	CA(#) drywall+cable length (36" std.)* CT9(#) TB/TG 9/16+cable length (36" std.)* CT15(#) TB/TG15/16+cable length (36" std.)* CTS(#) screw slot+cable length (36" std.)* CASL(#) drywall cable sloped ceiling*
Applies to both Up and Down * 10% decrease in lumen output	* Specify RAL#	* Only available with POE drivers	All the drivers are remote only; Applies to both UP & DOWN.	* Specify quantity	See Mounting kit guide for full specification code. *Specify length in inches.

CANOPY	BATTERY - REMOTE (OPT.)
SC square canopy RC round canopy White canopy standard	B(#) remote battery pack Remote only

