
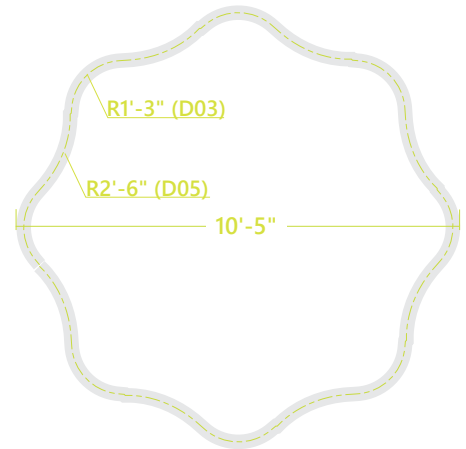


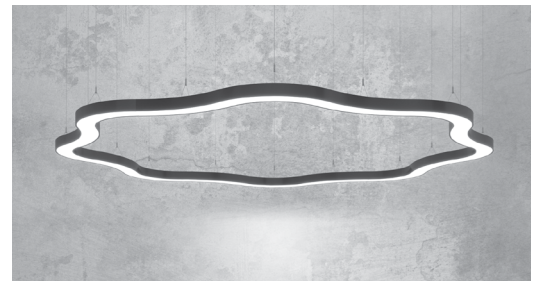

Ordering Guide (fill out green boxes to complete code)

SKPE	SW10			ASO	AL(30'-8")
PRODUCT ID	SHAPE REFERENCE #	LIGHT ENGINE		PATTERNS	LENGTH
SKPE Sketch Pendant Swirl	SW10 10 foot swirl	SL 60/40	surroundlite 60%up/40%down - direct/indirect	ASO other shapes	AL(30'-8") pattern length
		SL 0/100	surroundlite 0%up/100%down - direct		
* Nominal length					

NOM. LUMENS/FT		CRI	COLOR TEMP.	SO SHIELDING	FINISH	VOLTAGE	DRIVER
400	400 lm/ft - Minimum	80 80 CRI	27 2700 K	SO spotless lens	AP aluminum paint	120 120 V	DP dimming (0-10V) 1%
700	700 lm/ft - Maximum	90 90 CRI	30 3000 K		W white	277 277 V	
			35 3500 K		BLK black	UNV universal	
			40 4000 K		C custom		
Outputs between listed min and max are available Consult factory for outputs outside of the provided range.							

CIRCUITS	MOUNTING/SUSPENSION	CUSTOM (OPT.)
1 1 circuit	CA(#) drywall+cable length (36" std.)	C custom
+E(#) emergency circuit *	CT9(#) TB/TG 9/16+cable length (36" std.)	
+NL(#) night light circuit *	CT15(#) TB/TG15/16+cable length (36" std.)	
+GTD(#) generator transfer device *	CTS(#) screw slot+cable length (36" std.)	
	SA(#) drywall+stem length >48" (18" std.)	
	CASL(#) drywall cable sloped ceiling	
	SASL(#) drywall stem sloped ceiling	
	+SM seismic kit	
* Specify system	See Mounting kit guide for full specification code.	Please specify