
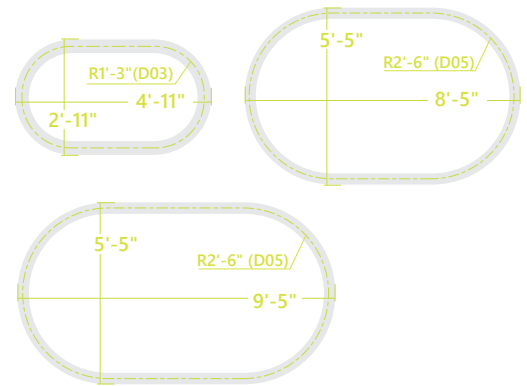


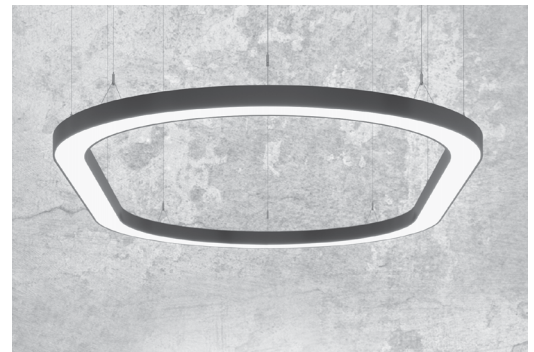

Ordering Guide (fill out green boxes to complete code)

SKPE						REC		AL ()	
PRODUCT ID		SHAPE REFERENCE #		LIGHT ENGINE		PATTERNS		LENGTH	
SKPE	Sketch Pendant Oval	OV5	5 foot oval	SL 60/40	surroundlite 60%up/40%down - direct/indirect	REC	rectangle	AL(11'-10")	OV5 pattern length
		OV8	8 foot oval	SL 0/100	surroundlite 0%up/100%down - direct			AL(21'-9")	OV8 pattern length
		OV9	9 foot oval					AL(23'-9")	OV9 pattern length
								* Nominal length	

NOM. LUMENS/FT		CRI		COLOR TEMP.		SO SHIELDING		FINISH		VOLTAGE		DRIVER	
400	400 lm/ft - Minimum	80	80 CRI	27	2700 K	SO	spotless lens	AP	aluminum paint	120	120 V	DP	dimming (0-10V) 1%
700	700 lm/ft - Maximum	90	90 CRI	30	3000 K			W	white	277	277 V		
				35	3500 K			BLK	black	UNV	universal		
				40	4000 K			C	custom				
Outputs between listed min and max are available Consult factory for outputs outside of the provided range.													

CIRCUITS		MOUNTING/SUSPENSION		CUSTOM (OPT.)	
1	1 circuit	CA(#)	drywall+cable length (36" std.)	C	custom
+E(#)	emergency circuit *	CT9(#)	TB/TG 9/16+cable length (36" std.)		
+NL(#)	night light circuit *	CT15(#)	TB/TG15/16+cable length (36" std.)		
+GTD(#)	generator transfer device *	CTS(#)	screw slot+cable length (36" std.)		
		SA(#)	drywall+stem length >48" (18" std.)		
		CASL(#)	drywall cable sloped ceiling		
		SASL(#)	drywall stem sloped ceiling		
		+SM	seismic kit		
* Specify system		See Mounting kit guide for full specification code.		Please specify	