


Project _____

Type _____

Notes _____

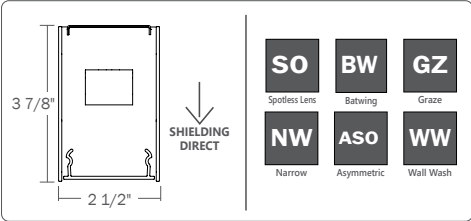

PERFORMANCE PER LINEAR FOOT AT 3500K, 80 CRI

NOMINAL LUMEN OUTPUT	INPUT WATTS*	EFFICACY	SHIELDING
1000 lm/ft	8.6 W/ft	116 lm/W	SO
1000 lm/ft	10 W/ft	103 lm/W	BW
750 lm/ft	7.6 W/ft	106 lm/W	GZ
750 lm/ft	7.6 W/ft	107 lm/W	NW
750 lm/ft	7.6 W/ft	107 lm/W	WW
750 lm/ft	7.6 W/ft	107 lm/W	ASO

Refer to axislighting.com for complete fixture details, IES files, and installation instructions



Ordering Guide

TB2SLED									
PRODUCT ID		NOM. LUM/FT DOWN		CRI		COLOR TEMP.		SHIELDING	
TB2SLED	Beam 2 - Surface LED	300	300 lm/ft - min	80	80 CRI	30	3000 K	SO	spotless lens
		750	750 lm/ft - max for GZ, NW, WW, ASO.*			35	3500 K	BW	Batwing (flush only)
						40	4000 K	GZ	Graze (flush only)
		1000	1000 lm/ft - max					NW	Narrow (flush only)
								WW	Wallwash (flush only)
								ASO	Asymmetric (flush only)
		Outputs between listed min and max are available. * 750 lm/ft max. only for GZ, NW and ASO.						Choose only one of the options above.	
								Available in 1' increments.	
								* Additional 5 working days required.	

VOLTAGE		DRIVER		CIRCUITS		MOUNTING		BATTERY (OPTIONAL)	
120	120 V	DP	dimming (0-10V) 1%	1	1 circuit	SB9	surface TB/TG 9/16	B(#)	battery pack (integral)
277	277 V			2	2 circuits	SB15	surface TB/TG 15/16		
347	347 V			+E(#)	emergency circuit*	SBS	surface screw slot t-bar		
UNV	universal					S	surface drywall ceiling		
						SC	surface solid ceiling		
				*Specify quantity				Minimum 5ft; Not available with 347V Please consult factory	

Refer to specification sheets for complete details. Note that only options shown above qualify for QuickShip+.