


Project _____

Type _____

Notes _____

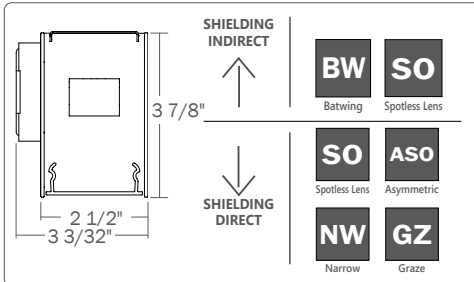

PERFORMANCE PER LINEAR FOOT AT 3500K, 80 CRI

NOMINAL LUMEN OUTPUT		INPUT WATTS*	EFFICACY	SHIELDING I/D
UPLIGHT	DOWNLIGHT			
1100 lm/ft	1000 lm/ft	16.8 W/ft	125 lm/W	SO/SO
1100 lm/ft	750 lm/ft	15.7 W/ft	128 lm/W	SO/ASO
1100 lm/ft	750 lm/ft	15.7 W/ft	122 lm/W	SO/NW
1100 lm/ft	750 lm/ft	15.7 W/ft	121 lm/W	SO/GZ
1100 lm/ft	1000 lm/ft	16.0 W/ft	131 lm/W	BW/SO
1100 lm/ft	750 lm/ft	14.9 W/ft	128 lm/W	BW/ASO
1100 lm/ft	750 lm/ft	14.9 W/ft	128 lm/W	BW/NW
1100 lm/ft	750 lm/ft	15.0 W/ft	127 lm/W	BW/GZ

Refer to axislighting.com for complete fixture details, IES files, and installation instructions

Ordering Guide

TB2WDILED								SO					
PRODUCT ID		NOM. LUM/FT UP		NOM. LUM/FT DOWN		CRI		COLOR TEMP.		SHIELDING INDIRECT		SHIELDING DIRECT	
TB2WDILED	Beam2 - Wall Direct/Indirect LED	300	300 lm/ft-Min	300	300 lm/ft - min	80	80 CRI	30	3000 K	SO	spotless lens	SO	spotless lens
		1100	1100 lm/ft-Max	750	750 lm/ft - max for			35	3500 K			ASO	Asymmetric, flush only
				GZ, NW, ASO*				40	4000 K			NW	Narrow, flush only
				1000	1000 lm/ft - max							GZ	Graze, flush only
		Outputs between listed min and max are available.		Outputs between listed min and max are available. * 750 lm/ft max. only for GZ, NW and ASO.								Choose only one of the options above.	

LENGTH (FT)	FINISH	VOLTAGE	DRIVER	CIRCUITS	BATTERY (OPT.)
4 4'	W white	120 120 V	DP dimming (0-10V) 1%	1 1 circuit	B(##) battery pack (integral)
5 5'	BLK black*	277 277 V		2 2 circuits	
8 8'	AP aluminum paint*	347 347 V		+E(##) emergency circuit*	
12 12'		UNV universal			
S(L) System Run *					
Available in 1' increments.	* Additional 5 working days required.			*Specify quantity	Minimum 5ft; Not available with 347V Please consult factory

Refer to specification sheets for complete details. Note that only options shown above qualify for QuickShip+.