


Project \_\_\_\_\_

Type \_\_\_\_\_

Notes \_\_\_\_\_

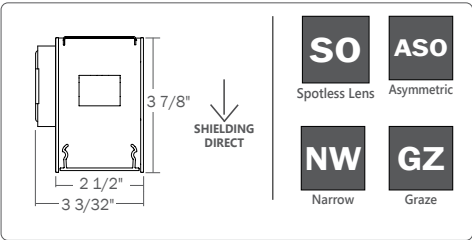

PERFORMANCE PER LINEAR FOOT AT 3500K, 80 CRI

NOMINAL LUMEN OUTPUT	INPUT WATTS*	EFFICACY	SHIELDING
1000 lm/ft	8.6 W/ft	116 lm/W	SO
750 lm/ft	7.6 W/ft	106 lm/W	GZ
750 lm/ft	7.6 W/ft	107 lm/W	NW
750 lm/ft	7.6 W/ft	107 lm/W	ASO

Refer to [axislighting.com](http://axislighting.com) for complete fixture details, IES files, and installation instructions



Ordering Guide

TB2WDLED													
PRODUCT ID		NOM. LUM/FT DOWN		CRI		COLOR TEMP.		SHIELDING		LENGTH (FT)		FINISH	
TB2WDLED	Beam2 - Wall Direct LED	300	300 lm/ft - min	80	80 CRI	30	3000 K	SO	spotless lens	4	4'	W	white
		750	750 lm/ft - max for			35	3500 K	ASO	Asymmetric , flush only	5	5'	BLK	black*
		GZ, NW, ASO*				40	4000 K	NW	Narrow , flush only	8	8'	AP	aluminum paint*
		1000	1000 lm/ft - max					GZ	Graze , flush only	12	12'		
										S(L)		System Run	
		Outputs between listed min and max are available. * 750 lm/ft max. only for GZ, NW and ASO.						Choose only one of the options above.		Available in 1' increments.		* Additional 5 working days required.	

VOLTAGE		DRIVER		CIRCUITS		BATTERY (OPT.)	
120	120 V	DP	dimming (0-10V) 1%	1	1 circuit	B(#)	battery pack (integral)
277	277 V			2	2 circuits		
347	347 V			+E(#)	emergency circuit*		
UNV	universal						
				*Specify quantity		Minimum 5ft; please consult factory. Not available with 347V.	

Refer to specification sheets for complete details. Note that only options shown above qualify for QuickShip+.