


Project _____

Type _____

Notes _____

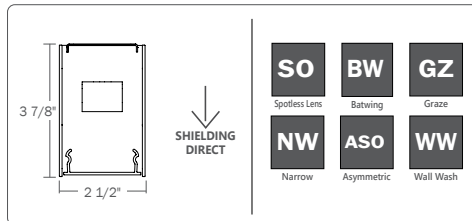

PERFORMANCE PER LINEAR FOOT AT 3500K, 80 CRI

NOMINAL LUMEN OUTPUT	INPUT WATTS*	EFFICACY	SHIELDING
1000 lm/ft	8.6 W/ft	116 lm/W	SO
1000 lm/ft	10 W/ft	103 lm/W	BW
750 lm/ft	7.6 W/ft	106 lm/W	GZ
750 lm/ft	7.6 W/ft	107 lm/W	NW
750 lm/ft	7.6 W/ft	107 lm/W	WW
750 lm/ft	7.6 W/ft	107 lm/W	ASO

Refer to axislighting.com for complete fixture details, IES files, and installation instructions

Ordering Guide

TB2DLED													
PRODUCT ID		NOM. LUM/FT DOWN		CRI		COLOR TEMP.		SHIELDING		LENGTH (FT)		FINISH	
TB2DLED	Beam2 - Pendant Direct LED	300	300 lm/ft - min	80	80 CRI	30	3000 K	SO	spotless lens	4	4'	W	white
		750	750 lm/ft - max for GZ, NW, WW, ASO.*			35	3500 K	BW	Batwing (flush only)	5	5'	BLK	black*
						40	4000 K	GZ	Graze (flush only)	8	8'	AP	aluminum paint*
		1000	1000 lm/ft - max					NW	Narrow (flush only)	12	12'		
								WW	Wallwash (flush only)	S(L) System Run			
								ASO	Asymmetric (flush only)				
		Outputs between listed min and max are available. * 750 lm/ft max. only for GZ, NW, WW and ASO.				Choose only one of the options above				Available in 1' increments.		* Additional 5 working days required.	

VOLTAGE		DRIVER		CIRCUITS		MOUNTING/SUSPENSION		BATTERY (OPT.)	
120	120 V	DP	dimming (0-10V) 1%	1	1 circuit	CA(#)	drywall+cable length (36" std.)	B(#)	battery pack (integral)
277	277 V			2	2 circuits	CT9(#)	TB/TG 9/16+cable length (36" std.)		
347	347 V			+E(#)	emergency circuit*	CT15(#)	TB/TG15/16+cable length (36" std.)		
UNV	universal					CTS(#)	screw slot+cable length (36" std.)		
						SA(#)	drywall+stem length <48" (18" std.)		
						CASL(#)	drywall cable sloped ceiling		
						SASL(#)	drywall stem sloped ceiling		
				*Specify quantity		See Mounting kit guide for full specification code. White canopy standard		Minimum 5ft; please consult factory. Not available with 347V.	

Refer to specification sheets for complete details. Note that only options shown above qualify for QuickShip+.