


Project _____

Type _____

Notes _____

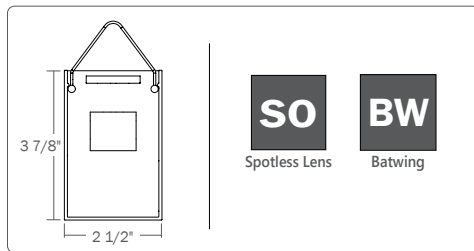

PERFORMANCE PER LINEAR FOOT AT 3500K, 80 CRI

NOMINAL LUMEN OUTPUT	INPUT WATTS*	EFFICACY	SHIELDING
1100 lm/ft	8.2 W/ft	135 lm/W	SO
1100 lm/ft	7.3 W/ft	149 lm/W	BW

Refer to axislighting.com for complete fixture details, IES files, and installation instructions

Ordering Guide

TB2ILED							
PRODUCT ID	NOM. LUM/FT UP	CRI	COLOR TEMP.	SHIELDING	LENGTH (FT)	FINISH	VOLTAGE
TB2ILED Beam2 - Pendant Indirect LED	300 300 lm/ft-Min	80 80 CRI	30 3000 K	SO spotless lens BW batwing	4 4'	W white BLK black* AP aluminum paint*	120 120 V
	1100 1100 lm/ft-Max		35 3500 K		5 5'		277 277 V
			40 4000 K		8 8'		347 347 V
					12 12' S(#) System Run		UNV universal
Outputs between listed min and max are available.				Choose only one of the options above.	Available in 1" increments.	* Additional 5 working days required.	

DRIVER	CIRCUITS	MOUNTING/SUSPENSION	BATTERY (OPT.)
DP dimming (0-10V) 1%	1 1 circuit 2 2 circuits +E(#) emergency circuit*	CA(#) drywall+cable length (36" std.) CT9(#) TB/TG 9/16+cable length (36" std.) CT15(#) TB/TG15/16+cable length (36" std.) CTS(#) screw slot+cable length (36" std.) SA(#) drywall+stem length <48" (18" std.) CASL(#) drywall cable sloped ceiling SASL(#) drywall stem sloped ceiling	B(#) battery pack (integral)
	*Specify quantity	See Mounting kit guide for full specification code. White canopy standard	Minimum 5ft; please consult factory. Not available with 347V.

Refer to specification sheets for complete details. Note that only options shown above qualify for QuickShip+.