


Beam 2 Square


SURFACE MOUNT

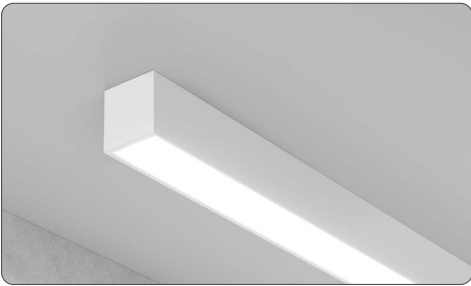

Project _____

Type _____

Notes _____

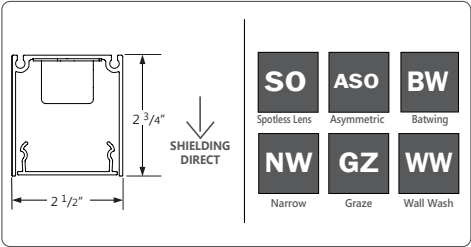

PERFORMANCE PER LINEAR FOOT AT 3500K, 80 CRI

NOMINAL LUMEN OUTPUT	INPUT WATTS*	EFFICACY	SHIELDING
1000 lm/ft	8.5 W/ft	118 lm/W	SO
750 lm/ft	7.6 W/ft	107 lm/W	ASO
1000 lm/ft	10 W/ft	100 lm/W	BW
750 lm/ft	7.5 W/ft	107 lm/W	NW
750 lm/ft	7.6 W/ft	106 lm/W	GZ
750 lm/ft	7.6 W/ft	107 lm/W	WW

Refer to axislighting.com for complete fixture details, IES files, and installation instructions



Ordering Guide

B2SQSLED													
PRODUCT ID		NOM. LUMENS/FT		CRI		COLOR TEMP.		SHIELDING		LENGTH		FINISH	
B2SQSLED	Beam 2 Square Surface LED	300	300 lm/ft - min	80	80 CRI	30	3000 K	SO	spotless lens	4	4'	W	white
		750	750 lm/ft - max for GZ, NW, WW, ASO*			35	3500 K	ASO	asymmetric, flush only	5	5'	BLK	black*
						40	4000 K	BW	batwing, flush only	6	6'	AP	aluminum paint*
		1000	1000 lm/ft - max					NW	narrow, flush only	8	8'		
								GZ	graze, flush only	12	12'		
								WW	wallwash, flush only	S(L)	system run		