


Notes _____

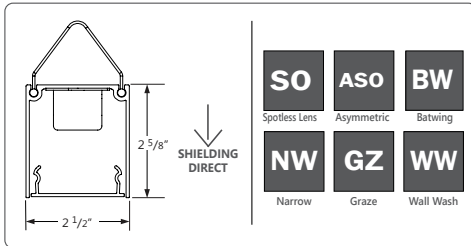

PERFORMANCE PER LINEAR FOOT AT 3500K, 80 CRI

NOMINAL LUMEN OUTPUT	INPUT WATTS*	EFFICACY	SHIELDING
1000 lm/ft	8.4 W/ft	118 lm/W	SO
750 lm/ft	7.6 W/ft	107 lm/W	ASO
1000 lm/ft	10 W/ft	100 lm/W	BW
750 lm/ft	7.5 W/ft	107 lm/W	NW
750 lm/ft	7.6 W/ft	106 lm/W	GZ
750 lm/ft	7.6 W/ft	107 lm/W	VW

Refer to axislighting.com for complete fixture details, IES files, and installation instructions



Ordering Guide

B2SQDLED															
PRODUCT ID		NOM. LUMENS/FT		CRI		COLOR TEMP.		SHIELDING		LENGTH		FINISH		VOLTAGE	
B2SQDLED	Beam 2 Square Pendant Direct	300	300 lm/ft - min	80	80 CRI	30	3000 K	SO	spotless lens	4	4'	W	white	120	120 V
		750	750 lm/ft - max for			35	3500 K	ASO	asymmetric, flush only	5	5'	BLK	black*	277	277 V
		GZ, NW, WW, ASO*				40	4000 K	BW	batwing, flush only	6	6'	AP	aluminum paint*	347	347 V
		1000	1000 lm/ft - max					NW	narrow, flush only	8	8'			UNV	universal
								GZ	graze, flush only	12	12'				
								WW	wallwash, flush only	S(L)	system run				
		Outputs between listed min and max are available. * 750 lm/ft max. only for GZ, NW, WW and ASO.								Available in 1' increments.		* Additional 5 working days required.			

DRIVER		CIRCUITS	MOUNTING/SUSPENSION	BATTERY (OPTIONAL)
DP	dimming (0-10V) 1%	1 1 circuit 2 2 circuits + E(#) emergency circuit*	CA(#) drywall+cable length (36" std.) CT9(#) TB/TG 9/16+cable length (36" std.) CT15(#) TB/TG15/16+cable length (36" std.) CTS(#) screw slot+cable length (36" std.) SA(#) drywall+stem length <48" (18" std.) CASL(#) drywall cable sloped ceiling SASL(#) drywall stem sloped ceiling	B(#) battery pack (integral)
		*Specify quantity	See Mounting kit guide for full specification code. White canopy standard	Minimum 4ft; please consult factory

i Refer to specification sheets for complete details. Note that only options shown above qualify for QuickShip+.