


Project

Type

Notes

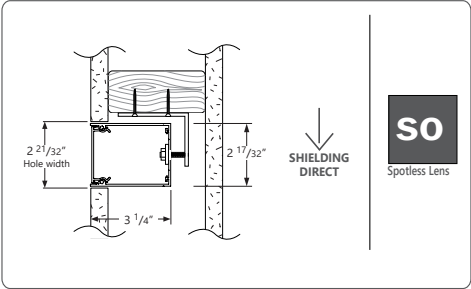

PERFORMANCE PER LINEAR FOOT AT 3500K, 80 CRI			
NOMINAL LUMEN OUTPUT	INPUT WATTS*	EFFICACY	SHIELDING
1000 lm/ft	8.5 W/ft	118 lm/W	SO

Refer to axislighting.com for complete fixture details, IES files, and installation instructions



Ordering Guide

B2SQRVLED									
PRODUCT ID		NOM. LUMENS/FT		CRI		COLOR TEMP.		SHIELDING	
B2SQRVLED	Beam 2 Square	300	300 lm/ft - min	80	80 CRI	30	3000 K	SO	spotless lens
	Recessed Vertical LED	1000	1000 lm/ft - max			35	3500 K		
			40			4000 K			
		Outputs between listed min and max are available.						Available in 1' increments.	
								* Additional 5 working days required.	

DRIVER		CIRCUITS		MOUNTING		BATTERY (OPTIONAL)		OTHER (OPTIONAL)		QS	
DP	dimming (0-10V) 1%	1	1 circuit	DF	drywall flange	B(#)	battery pack (integral)	EF	end feed	QUICKSHIP +	
		2	2 circuits	DS	drywall spackle flange			FW	flex whip (6' std) *		
		+E(#) emergency circuit*		D	drywall flangeless						
		*Specify quantity				Not available with 347V Please consult factory		* Other lengths available; please consult factory.			

Refer to specification sheets for complete details. Note that only options shown above qualify for QuickShip+.