

Project _____

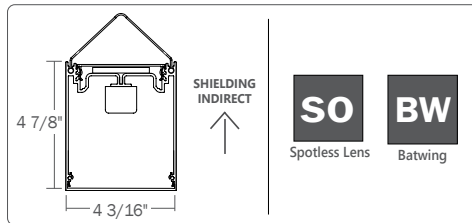
Type _____

Notes _____

PERFORMANCE PER LINEAR FOOT AT 3500K, 80 CRI

NOMINAL LUMEN OUTPUT	INPUT WATTS*	EFFICACY	SHIELDING
1200 lm/ft	8.5 W/ft	142 lm/W	SO
1200 lm/ft	8 W/ft	149 lm/W	BW

* Based on a 4 foot flush luminaire using one driver

Refer to axislighting.com for complete fixture details, IES files, and installation instructions

Ordering Guide

TB4ILED									
PRODUCT ID		NOM. LUM/FT UP		CRI		COLOR TEMP.		SHIELDING	
TB4ILED	BEAM4	400	400 lm/ft - Minimum	80	80 CRI	30	3000 K	SO	spotless lens
	Pendant Indirect LED	1200	1200 lm/ft - Maximum			35	3500 K	BW	Batwing
						40	4000 K		
		Outputs between listed min and max are available.						Available in 1' increments.	
								* Additional 5 working days required.	

VOLTAGE		DRIVER		CIRCUITS		MOUNTING		BATTERY (OPTIONAL)	
120	120 V	DP	dimming (0-10V) 1%	1	1 circuit	CA(#)	drywall+cable length (36"std)	B(#)	battery pack (integral)
277	277 V			2	2 circuits	CT9(#)	TB/TG 9/16+cable length (36" std.)		
347	347 V			+ E(#)	emergency circuit*	CT15(#)	TB/TG15/16+cable length (36" std.)		
UNV	universal					CTS(#)	screw slot+cable length (36" std.)		
						SA(#)	drywall+stem length>48 (18"std)		
						CASL(#)	drywall cable sloped ceiling		
						SASL(#)	drywall stem sloped ceiling		
				*Specify quantity		See Mounting kit guide for full specification code. White canopy standard		Minimum 5ft; Not available with 347V Please consult factory	

❗ Refer to specification sheets for complete details. Note that only options shown above qualify for QuickShip+.