

Project _____


Type _____

Notes _____

PERFORMANCE PER LINEAR FOOT AT 3500K, 80 CRI

NOMINAL LUMEN OUTPUT	INPUT WATTS*	EFFICACY	SHIELDING
1200 lm/ft	8.5 W/ft	142 lm/W	SO

* Based on a 4 foot flush luminaire using one driver

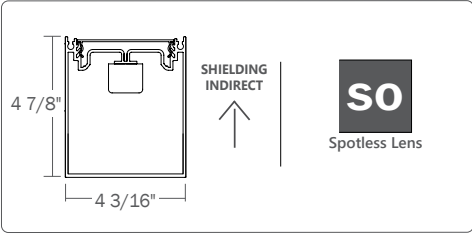

Refer to axislighting.com for complete fixture details, IES files, and installation instructions



Ordering Guide

TB4WILED									
PRODUCT ID		NOM. LUM/FT UP		CRI		COLOR TEMP.		SHIELDING INDIRECT	
TB4WILED	Beam4 - Wall	400	400 lm/ft - Minimum	80	80 CRI	30	3000 K	SO	spotless lens
	Indirect LED	1200	1200 lm/ft - Maximum			35	3500 K		
						40	4000 K		
		Outputs between listed min and max are available.						Available in 1' increments.	
								* Additional 5 working days required.	

VOLTAGE		DRIVER		CIRCUITS		BATTERY (OPT.)	
120	120 V	DP	dimming (0-10V) 1%	1	1 circuit	B(#)	battery pack (integral)
277	277 V			2	2 circuits		
347	347 V			+E(#) emergency circuit*			
UNV	universal						
				*Specify quantity		Requires 120V or 277V; Minimum 5ft; Not available with 347V Please consult factory	

Refer to specification sheets for complete details. Note that only options shown above qualify for QuickShip+.