


Beam 4

RECESSED VERTICAL MOUNT

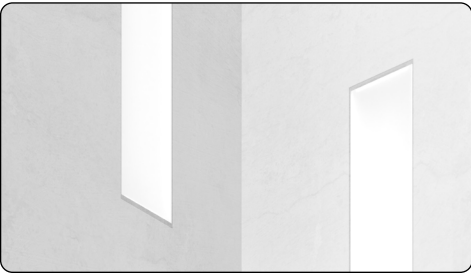

Project


Type

Notes

PERFORMANCE PER LINEAR FOOT AT 3500K, 80 CRI

NOMINAL LUMEN OUTPUT	INPUT WATTS*	EFFICACY	SHIELDING
1200 lm/ft	9.7 W/ft	124 lm/W	SO

* Based on a 4 foot flush luminaire using one driver

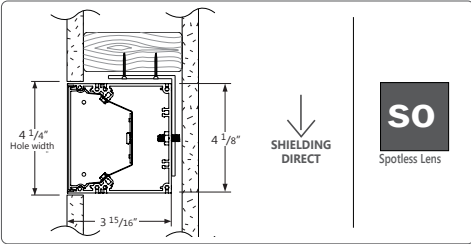

DLC Approved Options

LUMEN OUTPUT	CRI	COLOR TEMP.	SHIELDING	LENGTH	VOLTAGE	DRIVER
400 lm/ft	80	3000 K	FL	4'	universal	DP
600 lm/ft		3500 K		8'		
800 lm/ft		4000 K		12'		
1000 lm/ft						

Refer to axislighting.com for complete fixture details, IES files, and installation instructions



Ordering Guide

BBRVLED								SO			
PRODUCT ID		NOM. LUM/FT DOWN		CRI		COLOR TEMP.		SHIELDING		LENGTH (FT)	
BBRVLED	Recessed Vertical LED	400	400 lm/ft - Minimum	80	80 CRI	30	3000 K	SO	spotless lens	4	4'
		1200	1200 lm/ft - Maximum			35	3500 K			5	5'
						40	4000 K			6	6'
										8	8'
								12	12'		
										S(L)	System Run
		Outputs between listed min and max are available.								Available in 1' increments.	
										* Additional 5 working days required.	

VOLTAGE		DRIVER		CIRCUITS		MOUNTING		BATTERY (OPTIONAL)		OTHER (OPTIONAL)		QS
120	120 V	DP	dimming (0-10V) 1%	1	1 circuit	DF	drywall flange	B(#)	battery pack 4' sections	EF	end feed	QUICKSHIP +
277	277 V			2	2 circuits	DS	drywall spackle flange			FW	flex whip (6' std)*	
347	347 V			+E(#)	emergency circuit*	D	drywall flangeless					
UNV	universal											
				*Specify quantity				Minimum 5ft; Not available with 347V Please consult factory		* Other lengths available; please consult factory.		

Refer to specification sheets for complete details. Note that only options shown above qualify for QuickShip+.