


Project \_\_\_\_\_

Type \_\_\_\_\_

Notes \_\_\_\_\_

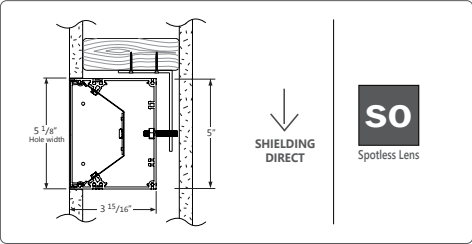

PERFORMANCE PER LINEAR FOOT AT 3500K, 80 CRI

NOMINAL LUMEN OUTPUT	INPUT WATTS*	EFFICACY	SHIELDING
1200 lm/ft	9.4 W/ft	128 lm/W	SO

Refer to [axislighting.com](http://axislighting.com) for complete fixture details, IES files, and installation instructions



Ordering Guide

B6RVLED											
PRODUCT ID		NOM. LUMENS/FT		CRI		COLOR TEMP.		SHIELDING		LENGTH	
B6RVLED	Beam 6	400	400 lm/ft - Minimum	80	80 CRI	30	3000 K	SO	spotless lens	4	4'
	Recessed Vertical	1200	1200 lm/ft - Maximum			35	3500 K			5	5'
	LED					40	4000 K			6	6'
										8	8'
										12	12'
										S#	system run
		Outputs between listed min and max are available.								Available in 1' increments.	
										*Additional 5 working days required.	

VOLTAGE		DRIVER		CIRCUITS		MOUNTING/SUSPENSION		BATTERY (OPTIONAL)		OTHER (OPTIONAL)		QS
120	120 V	DP	dimming (0-10V) 1%	1	1 circuit	DF	drywall flange	B(#)	battery pack 4' sections	EF	end feed	QUICKSHIP +
277	277 V			2	2 circuits	DS	drywall spackle flange			FW	flex whip (6' std)*	
347	347 V			+ E(#) emergency circuit*		D	drywall flangeless					
UNV	universal											
				*Specify quantity				Not available with 347V. Please consult factory.		* Other lengths available; please consult factory.		

Refer to specification sheets for complete details. Note that only options shown above qualify for QuickShip+.