


Project _____

Type _____

Notes _____

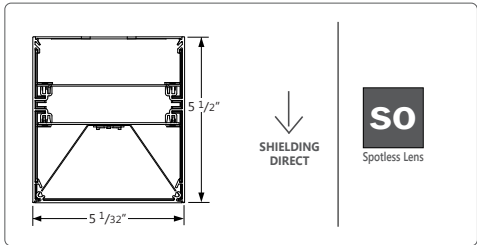

PERFORMANCE PER LINEAR FOOT AT 3500K, 80 CRI			
NOMINAL LUMEN OUTPUT	INPUT WATTS*	EFFICACY	SHIELDING
1200 lm/ft	9.4 W/ft	128 lm/W	SO

Refer to axislighting.com for complete fixture details, IES files, and installation instructions



Ordering Guide

B6SLED											
PRODUCT ID		NOM. LUMENS/FT		CRI		COLOR TEMP.		SHIELDING		LENGTH	
B6SLED	Beam 6 Surface	400	400 lm/ft - Minimum	80	80 CRI	30	3000 K	SO	spotless lens	4	4'
		1200	1200 lm/ft - Maximum			35	3500 K			5	5'
						40	4000 K			6	6'
										8	8'
										12	12'
										S(L)	system run
		Outputs between listed min and max are available.								Available in 1" increments.	
										*Additional 5 working days required.	

DRIVER		CIRCUITS		MOUNTING/SUSPENSION		BATTERY (OPTIONAL)		OTHER (OPTIONAL)		QS
DP	dimming (0-10V) 1%	1	1 circuit	SB9	surface TB/TG 9/16	B(#)	battery pack 4' sections	EF	end feed	QUICKSHIP +
		2	2 circuits	SB15	surface TB/TG 15/16			FW	flex whip (6' std)*	
		+ E(#)	emergency circuit*	SBS	surface screw slot t-bar					
				S	surface drywall ceiling					
				SC	surface solid ceiling					
		*Specify quantity				Not available with 347V. Please consult factory.		* Other lengths available; please consult factory.		

Refer to specification sheets for complete details. Note that only options shown above qualify for QuickShip+.