


Project _____

Type _____

Notes _____

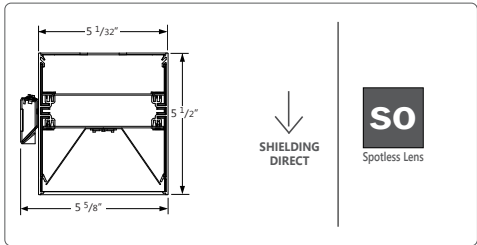

PERFORMANCE PER LINEAR FOOT AT 3500K, 80 CRI

NOMINAL LUMEN OUTPUT	INPUT WATTS*	EFFICACY	SHIELDING
1200 lm/ft	9.4 W/ft	128 lm/W	SO

Refer to axislighting.com for complete fixture details, IES files, and installation instructions



Ordering Guide

B6WDLED									
PRODUCT ID		NOM. LUMENS/FT		CRI		COLOR TEMP.		SHIELDING	
B6WDLED	Beam 6	400	400 lm/ft - Minimum	80	80 CRI	30	3000 K	SO	spotless lens
	Wall Direct LED	1200	1200 lm/ft - Maximum			35	3500 K		
						40	4000 K		
		Outputs between listed min and max are available.						Available in 1' increments.	
								*Additional 5 working days required.	

VOLTAGE		DRIVER		CIRCUITS		BATTERY (OPTIONAL)	
120	120 V	DP	dimming (0-10V) 1%	1	1 circuit	B(#)	battery pack 4' sections
277	277 V			2	2 circuits		
347	347 V			+E(#)	emergency circuit*		
UNV	universal						
				*Specify quantity		Not available with 347V. Please consult factory	

Refer to specification sheets for complete details. Note that only options shown above qualify for QuickShip+.