


Project _____

Type _____

Notes _____

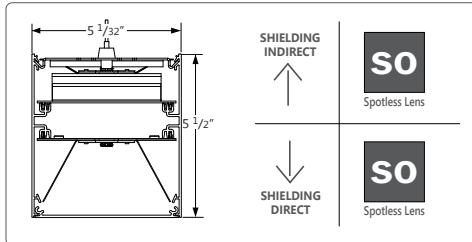

PERFORMANCE PER LINEAR FOOT AT 3500K, 80 CRI

NOMINAL LUMEN OUTPUT		INPUT WATTS*	EFFICACY	SHIELDING
UPLIGHT	DOWNLIGHT			
1200 lm/ft	1200 lm/ft	17.17 W/ft	140 lm/W	SO

Refer to axislighting.com for complete fixture details, IES files, and installation instructions

Ordering Guide

B6DILED		NOM. LUMENS/FT UP		NOM. LUMENS/FT DOWN		CRI		COLOR TEMP.		SHIELDING		LENGTH		FINISH	
PRODUCT ID															
B6DILED	Beam 6 Pendant Direct / Indirect LED	400	400 lm/ft - min	400	400 lm/ft - min	80	80 CRI	30	3000 K	SO	spotless lens	4	4'	W	white
		1200	1200 lm/ft - max	1200	1200 lm/ft - max			35	3500 K			5	5'		BLK black*
								40	4000 K			6	6'		AP aluminum paint*
												8	8'		
												12	12'		
												S(L)	system run		
Outputs between listed min and max are available.						Applies to both UP & DOWN.				Available in 1' increments.			*Additional 5 working days required.		

VOLTAGE		DRIVER		CIRCUITS		MOUNTING/SUSPENSION		BATTERY (OPT.)	
120	120 V	DP	dimming (0-10V) 1%	1	1 circuit	CA(#)	drywall+cable length (36" std.)	B(#)	battery pack 4' sections
277	277 V			2	2 circuits	CT9(#)	TB/TG 9/16+cable length (36" std.)		
347	347 V			+E(#)	emergency circuit*	CT15(#)	TB/TG15/16+cable length (36" std.)		
UNV	universal					CTS(#)	screw slot+cable length (36" std.)		
						SA(#)	drywall+stem length >48" (18" std.)		
						CASL(#)	drywall cable sloped ceiling		
						SASL(#)	drywall stem sloped ceiling		
						+SM	seismic kit		
				*Specify quantity		See Mounting kit guide for full specification code.			Not available with 347V Please consult factory

Refer to specification sheets for complete details. Note that only options shown above qualify for QuickShip+.