


Project _____

Type _____

Notes _____

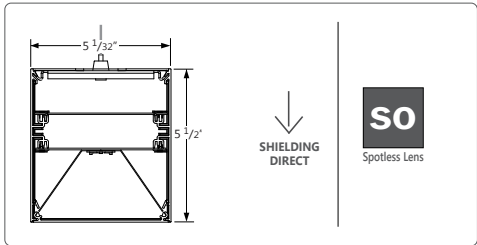

PERFORMANCE PER LINEAR FOOT AT 3500K, 80 CRI			
NOMINAL LUMEN OUTPUT	INPUT WATTS*	EFFICACY	SHIELDING
1200 lm/ft	9.4 W/ft	128 lm/W	SO

Refer to axislighting.com for complete fixture details, IES files, and installation instructions



Ordering Guide

B6DLED											
PRODUCT ID		NOM. LUMENS/FT		CRI		COLOR TEMP.		SHIELDING		LENGTH	
B6DLED	Beam 6 Pendant	400	400 lm/ft - Minimum	80	80 CRI	30	3000 K	SO	spotless lens	4	4'
	Direct	1200	1200 lm/ft - Maximum			35	3500 K			5	5'
			40			4000 K	6			6'	
							8			8'	
							12			12'	
										S#	system run
		Outputs between listed min and max are available.								Available in 1' increments.	
										*Additional 5 working days required.	

VOLTAGE		DRIVER		CIRCUITS		MOUNTING		BATTERY (OPTIONAL)	
120	120 V	DP	dimming (0-10V) 1%	1	1 circuit	CA(#)	drywall+cable length (36" std.)	B#	battery pack 4' sections
277	277 V			2	2 circuits	CT9(#)	TB/TG 9/16+cable length (36" std.)		
347	347 V			+E(#)	emergency circuit*	CT15(#)	TB/TG15/16+cable length (36" std.)		
UNV	universal					CTS(#)	screw slot+cable length (36" std.)		
						SA(#)	drywall+stem length >48" (18" std.)		
						CASL(#)	drywall cable sloped ceiling		
						SASL(#)	drywall stem sloped ceiling		
						+SM	seismic kit		
				*Specify quantity		See Mounting kit guide for full specification code.		Not available with 347V Please consult factory	

Refer to specification sheets for complete details. Note that only options shown above qualify for QuickShip+.