


*** Please see page 2 for example on how to specify various right angle patterns.**

Project _____


Type _____

Notes _____

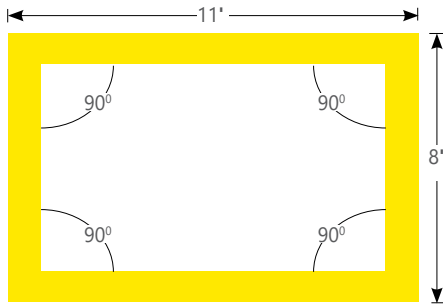

BMRLDPAT	R (11'X8')
PRODUCT ID	PATTERNS AND LENGTH

TOP VIEW - Rectangle Corner Pattern



BMRLDPAT	U (9'X11'X11')
PRODUCT ID	PATTERNS AND LENGTH

TOP VIEW - Open Shape Corner Pattern

IMPORTANT! – all corner patterns must be submitted with drawings indicating dimensions and angles degree.

Refer to axislighting.com for complete fixture details, IES files, and installation instructions



Ordering Guide

BMRLDPAT														
PRODUCT ID		PATTERNS AND LENGTH (SELECT ONE)	LUMENS/FT DIRECT		CRI	COLOUR TEMP.		SHIELDING DIRECT	SPECIFY LENGTH					
BMRLDPAT	Beam 3 Recessed	S(L) square shape (length)	300	300 lm/ft - min	80	80 CRI	35	3500 K	FL	flush	NL	nominal		
		R(LxL) rectangular shape (length)	1000	1000 lm/ft - max for			30	3000 K	RG	regressed			EX	exact
		U(LxLxL) U shape (length)		GZ, NW, WW, ASO.*			40	4000 K	ASO	asymmetric, flush only				
		L(LxL) L shape (length)	1100	1100 lm/ft - max					BW	batwing, flush only				
								NW	narrow, flush only					
								GZ	graze, flush only					
								WW	wallwash, flush only					
		Comes in 90 degree only.	Outputs between listed min and max are available. * 1000 lm/ft max. only for GZ, NW, WW and ASO.					Lens options use spotless lens. Choose only one of the options above.						


FINISH		VOLTAGE		DRIVER		CIRCUITS		MOUNTING/SUSPENSION		BATTERY (OPT.)		OTHER		QUICKSHIP +	QS
W	white	120	120V	DP	dimming (0-10V) 1%	1	1 circuit	TB9	t-bar 9/16"	B(#)	battery pack	EF	end feed		
BLK	black*	277	277V			2	2 circuits	TB15	t-bar 15/16"		4' sections	FW	flex whip (6' std)*		
AP	aluminum paint*	347	347V			+E(#)	emergency circuit*	ST	screw slot t-bar			CP	Chicago plenum		
		UNV	universal					TG9	tegular 9/16"						
								TG15	tegular 15/16"						
								DF	drywall flange						
								D	drywall flangeless						
								DB	slip-through bracket						
								DS	drywall spackle flange						
								TX	tx Hunter Douglas techstyle*						
*Additional 5 working days required.						*Specify quantity		*TX available with flush lens only		Please consult factory		* Other lengths available; please consult factory.			

Refer to specification sheets for complete details. Note that only options shown above qualify for QuickShip+.


How to Specify 90 degree Corners and Patterns

Example

Defining R - Rectangular shape

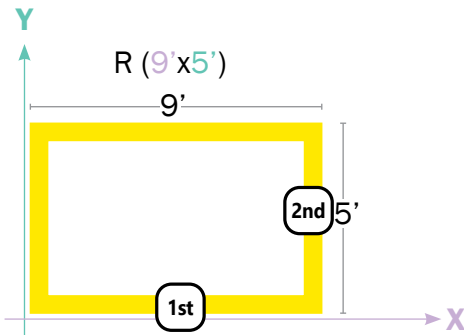


Defining L shape

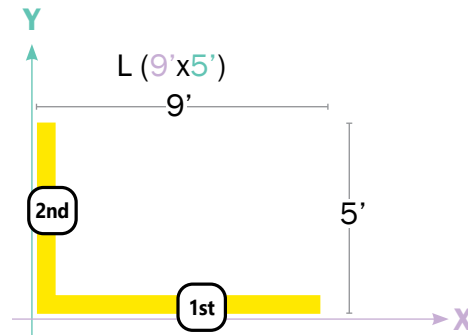


Note: The first number will always define the width, the second - the length.

Defining U shape

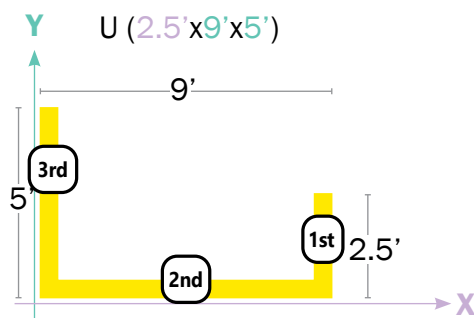

Note: The first number will always define the right arm length, the second - the width, and the third - the left arm length.

Defining S - Square shape

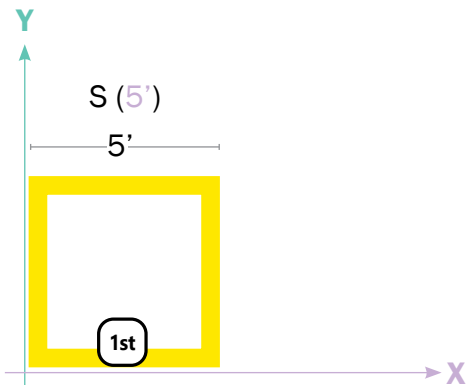

Note: The number will define the width. (All sides are the same length).



A large grid of 30 columns and 40 rows, intended for drawing corner patterns. The grid lines are thin and light gray.