


*** Please see page 2 for example on how to specify various right angle patterns.**

Project _____


Type _____

Notes _____

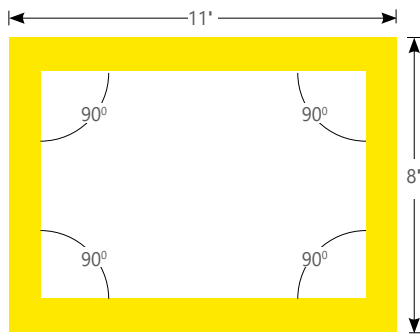

B2SQDLEDPAT	R (11'X8')
PRODUCT ID	PATTERNS AND LENGTH

TOP VIEW - Rectangle Corner Pattern



B2SQDLEDPAT	U (9'X11'X11')
PRODUCT ID	PATTERNS AND LENGTH

TOP VIEW - Open Shape Corner Pattern

IMPORTANT! – all corner patterns must be submitted with drawings indicating dimensions and angles degree.

Refer to axislighting.com for complete fixture details, IES files, and installation instructions



Ordering Guide

B2SQDLEDPAT						
PRODUCT ID	PATTERNS AND LENGTH (SELECT ONE)	LUMENS/FT DIRECT	CRI	COLOUR TEMP.	SHIELDING DIRECT	SPECIFY LENGTH
B2SQDLEDPAT	Beam 2 Square Direct	S(L)* square shape (length) R(LxL)* rectangular shape (length) U(LxLxL)* U shape (length) L(LxL)* L shape (length)	300 300 lm/ft - Min 750 750 lm/ft - max for GZ, NW, WW, ASO* 1000 1000 lm/ft - max	80 80 CRI	30 3000 K 35 3500 K 40 4000 K	SO spotless lens ASO asymmetric, flush only BW batwing, flush only NW narrow, flush only GZ graze, flush only WW wallwash, flush only
	*Comes in 90 degree only.	Outputs between listed min and max are available. * 750 lm/ft max. only for GZ, NW, WW and ASO.				NL nominal EX exact


FINISH	VOLTAGE	DRIVER	CIRCUITS	MOUNTING/SUSPENSION	BATTERY (OPT.)
W white BLK black* AP aluminum paint*	120 120V 277 277V 347 347V UNV universal	DP dimming (0-10V) 1%	1 1 circuit 2 2 circuits +E(#) emergency circuit*	CA(#) drywall+cable length (36"std) CT9(#) TB/TG 9/16+cable length (36" std.) CT15(#) TB/TG15/16+cable length (36" std.) CTS(#) screw slot+cable length (36" std.) SA(#) drywall+stem length<48 (18"std) CASL(#) drywall cable sloped ceiling SASL(#) drywall stem sloped ceiling See Mounting kit guide for full specification code.	B(#) battery pack 4' sections
* Additional 5 workdays required.			*Specify quantity		Requires 120V or 277V Please consult factory

Refer to specification sheets for complete details. Note that only options shown above qualify for QuickShip+.


How to Specify 90 degree Corners and Patterns

Example

Defining R - Rectangular shape

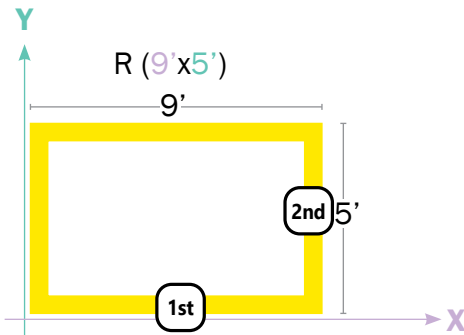


Defining L shape

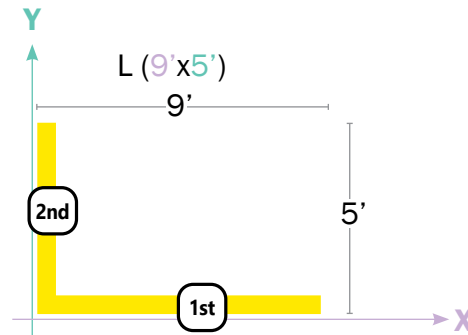


Note: The first number will always define the width, the second - the length.

Defining U shape

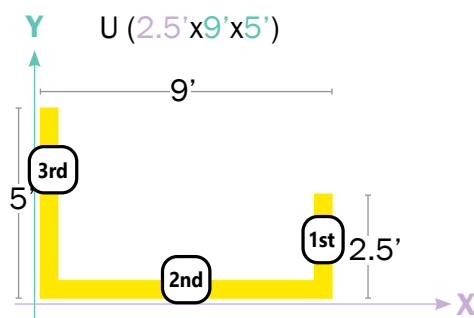

Note: The first number will always define the right arm length, the second - the width, and the third - the left arm length.

Defining S - Square shape

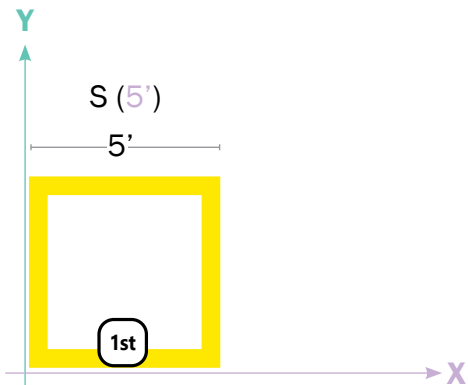

Note: The number will define the width. (All sides are the same length).

IMPORTANT – all corner patterns must be submitted with drawings indicating dimensions and angles degree.

