


\* Please see page 2 for example on how to specify various right angle patterns.

Project \_\_\_\_\_


Type \_\_\_\_\_

Notes \_\_\_\_\_

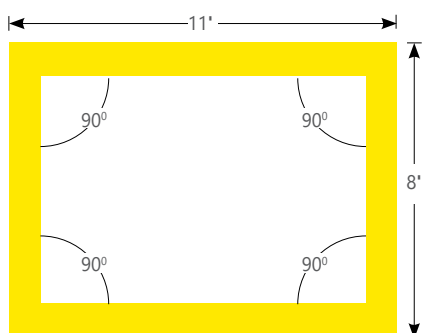

| TB2DILEDPAT | R (11'X8')          |
|-------------|---------------------|
| PRODUCT ID  | PATTERNS AND LENGTH |

TOP VIEW - Rectangle Corner Pattern



| TB2DILEDPAT | U (9'X11'X11')      |
|-------------|---------------------|
| PRODUCT ID  | PATTERNS AND LENGTH |

TOP VIEW - Open Shape Corner Pattern

**IMPORTANT! – all corner patterns must be submitted with drawings indicating dimensions and angles degree.**

Refer to [axislighting.com](http://axislighting.com) for complete fixture details, IES files, and installation instructions



## Ordering Guide

| TB2DILEDPAT | PRODUCT ID                | PATTERNS AND LENGTH (SELECT ONE)  | LUMENS/FT INDIRECT                                     | LUMENS/FT DIRECT  | CRI              | COLOUR TEMP.   | SHIELDING INDIRECT                                       |
|-------------|---------------------------|---|--|---|------------------|--|--|
| TB2DILEDPAT | Beam 2<br>Direct/Indirect | <b>S(L)*</b> square shape (length)<br><b>R(LxL)*</b> rectangular shape (length)<br><b>U(LxLxL)*</b> U shape (length)<br><b>L(LxL)*</b> L shape (length) | <b>300</b> 300 lm/ft-Min<br><b>1100</b> 1100 lm/ft-Max | <b>300</b> 300 lm/ft - Min<br><b>750</b> 750 lm/ft - max for GZ, NW, WW, ASO*<br><b>1000</b> 1000 lm/ft - max | <b>80</b> 80 CRI | <b>35</b> 3500 K<br><b>30</b> 3000 K<br><b>40</b> 4000 K | <b>SO</b> spotless lens<br><b>BW</b> batwing, flush only |
|             |                           | *Comes in 90 degree only.   | Outputs between listed min and max are available.      | Outputs between listed min and max are available.<br>* 750 lm/ft max. only for GZ, NW, WW and ASO.            |                  |  |  |

| SHIELDING DIRECT   | SPECIFY LENGTH                       | FINISH   | VOLTAGE   | DRIVER                       | CIRCUITS   | MOUNTING/SUSPENSION  |
|--|--------------------------------------|--|---|------------------------------|--|--|
| <b>SO</b> spotless lens<br><b>ASO</b> asymmetric, flush only<br><b>BW</b> batwing, flush only<br><b>NW</b> narrow, flush only<br><b>GZ</b> graze, flush only<br><b>WW</b> wallwash, flush only | <b>NL</b> nominal<br><b>EX</b> exact | <b>W</b> white<br><b>BLK</b> black*<br><b>AP</b> aluminum paint* | <b>120</b> 120V<br><b>277</b> 277V<br><b>347</b> 347V<br><b>UNV</b> universal | <b>DP</b> dimming (0-10V) 1% | <b>1</b> 1 circuit<br><b>2</b> 2 circuits<br><b>+E(#)</b> emergency circuit* | <b>CA(#)</b> drywall+cable length (36" std.)<br><b>CT9(#)</b> TB/TG 9/16+cable length (36" std.)<br><b>CT15(#)</b> TB/TG15/16+cable length (36" std.)<br><b>CTS(#)</b> screw slot+cable length (36" std.)<br><b>SA(#)</b> drywall+stem length <48" (18" std.)<br><b>CASL(#)</b> drywall cable sloped ceiling<br><b>SASL(#)</b> drywall stem sloped ceiling |
|  |                                      | *Additional 5 working days required.                             |   |                              | *Specify quantity  | See <a href="#">Mounting kit guide for full specification code.</a><br>Specify quantity  |


| BATTERY (OPT.)                                  |                             |
|---|-----------------------------|
| <b>B(#)</b>                                     | battery pack<br>4' sections |
| Requires 120V or 277V<br>Please consult factory |                             |

Refer to specification sheets for complete details. Note that only options shown above qualify for QuickShip+.


## How to Specify 90 degree Corners and Patterns

### Example

#### Defining R - Rectangular shape

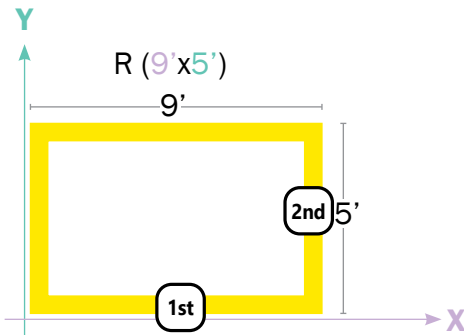


#### Defining L shape

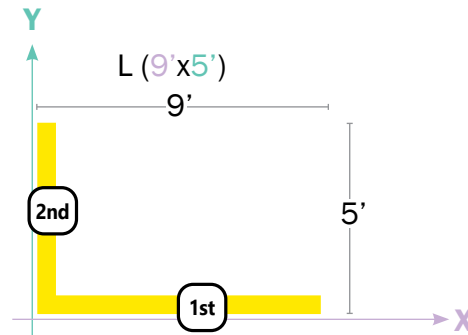


**Note:** The first number will always define the width, the second - the length.

#### Defining U shape

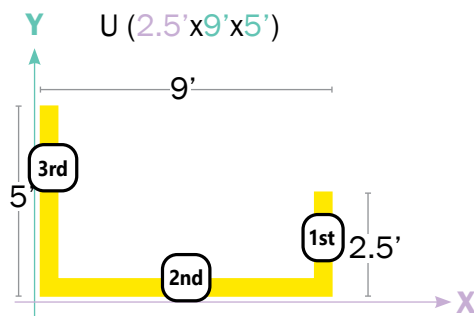

**Note:** The first number will always define the right arm length, the second - the width, and the third - the left arm length.

#### Defining S - Square shape

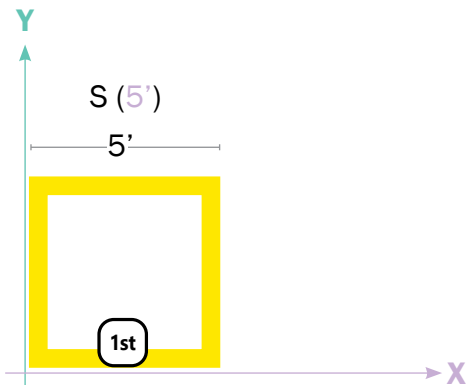

**Note:** The number will define the width. (All sides are the same length).



A large grid of squares, intended for drawing corner patterns. The grid is composed of 30 columns and 30 rows of squares, providing a space for technical drawings.