


*** Please see page 2 for example on how to specify various right angle patterns.**

Project _____


Type _____

Notes _____

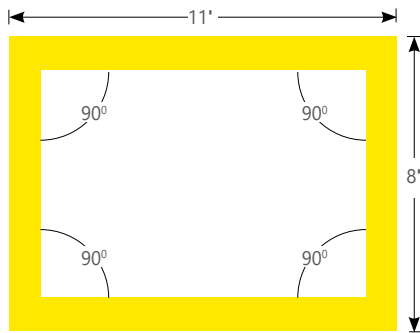

TB2ILEDPAT	R (11'X8')
PRODUCT ID	PATTERNS AND LENGTH

TOP VIEW - Rectangle Corner Pattern



TB2ILEDPAT	U (9'X11'X11')
PRODUCT ID	PATTERNS AND LENGTH

TOP VIEW - Open Shape Corner Pattern

IMPORTANT! – all corner patterns must be submitted with drawings indicating dimensions and angles degree.

Refer to axislighting.com for complete fixture details, IES files, and installation instructions



Ordering Guide

TB2ILEDPAT	PRODUCT ID	PATTERNS AND LENGTH (SELECT ONE)	LUMENS/FT INDIRECT	CRI	COLOUR TEMP.	SHIELDING INDIRECT	SPECIFY LENGTH
TB2ILEDPAT	Beam 2 Indirect	S(L)* square shape (length) R(LxL)* rectangular shape (length) U(LxLxL)* U shape (length) L(LxL)* L shape (length)	300 300 lm/ft-Min 1100 1100 lm/ft-Max	80 80 CRI	30 3000 K 35 3500 K 40 4000 K	SO spotless lens BW batwing, flush only	NL nominal EX exact
		*Comes in 90 degree only.	Outputs between listed min and max are available.				


FINISH	VOLTAGE	DRIVER	CIRCUITS	MOUNTING/SUSPENSION	BATTERY (OPT.)
W white BLK black* AP aluminum paint*	120 120V 277 277V 347 347V UNV universal	DP dimming (0-10V) 1%	1 1 circuit 2 2 circuits +E(#) emergency circuit*	CA(#) drywall+cable length (36" std) CT9(#) TB/TG 9/16+cable length (36" std.) CT15(#) TB/TG15/16+cable length (36" std.) CTS(#) screw slot+cable length (36" std.) SA(#) drywall+stem length>48 (18" std) CASL(#) drywall cable sloped ceiling SASL(#) drywall stem sloped ceiling	B(#) battery pack 4' sections
*Additional 5 working days required.			*Specify quantity	See Mounting kit guide for full specification code. Specify quantity	Requires 120V or 277V Please consult factory

Refer to specification sheets for complete details. Note that only options shown above qualify for QuickShip+.


How to Specify 90 degree Corners and Patterns

Example

Defining R - Rectangular shape

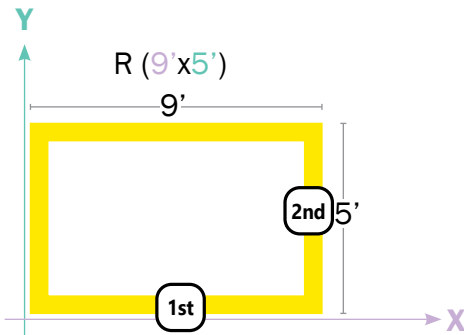


Defining L shape

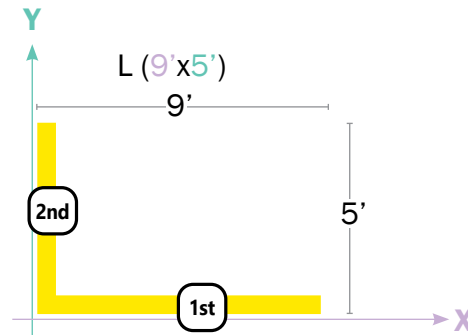


Note: The first number will always define the width, the second - the length.

Defining U shape

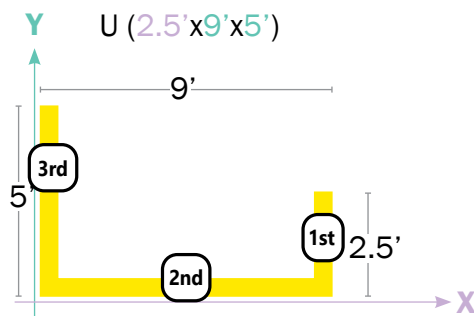

Note: The first number will always define the right arm length, the second - the width, and the third - the left arm length.

Defining S - Square shape

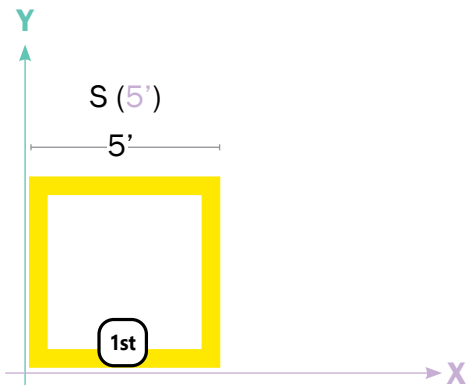

Note: The number will define the width. (All sides are the same length).

IMPORTANT – all corner patterns must be submitted with drawings indicating dimensions and angles degree.



A large grid of squares, intended for drawing corner patterns. The grid consists of 30 columns and 30 rows of squares, providing a space for technical drawings.