


*** Please see page 2 for example on how to specify various right angle patterns.**

Project _____


Type _____

Notes _____

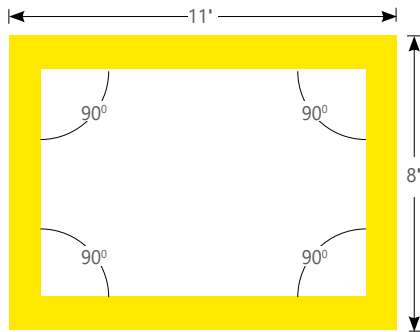

TB4DILEDPAT	R (11'X8')
PRODUCT ID	PATTERNS AND LENGTH

TOP VIEW - Rectangle Corner Pattern



TB4DILEDPAT	U (9'X11'X11')
PRODUCT ID	PATTERNS AND LENGTH

TOP VIEW - Open Shape Corner Pattern

IMPORTANT! – all corner patterns must be submitted with drawings indicating dimensions and angles degree.

Refer to axislighting.com for complete fixture details, IES files, and installation instructions



Ordering Guide

TB4DILEDPAT	PRODUCT ID	PATTERNS AND LENGTH (SELECT ONE)	LUMENS/FT INDIRECT	LUMENS/FT DIRECT	CRI	COLOUR TEMP.	SHIELDING INDIRECT
TB4DILEDPAT	Beam 4 Direct/Indirect	S(L) square shape (length) R(LxL) rectangular shape (length) U(LxLxL) U shape (length) L(LxL) L shape (length)	400 400 lm/ft - Min. 1200 1200 lm/ft - Max.	400 400 lm/ft - Min. 1000 1000 lm/ft - Max for GZ, NW, WW, ASO.* 1200 1200 lm/ft - Max.	80 80 CRI	35 3500 K 30 3000 K 40 4000 K	SO spotless lens BW batwing
Comes in 90 degree only.			Outputs between listed min and max are available.	Outputs between listed min and max are available. * 1000 lm/ft max. only for GZ, NW, WW and ASO.			

SHIELDING DIRECT	SPECIFY LENGTH	FINISH	VOLTAGE	DRIVER	CIRCUITS	MOUNTING/SUSPENSION
SO spotless lens ASO asymmetric BW batwing NW narrow GZ graze WW wallwash	NL nominal EX exact	W white BLK black* AP aluminum paint*	120 120V 277 277V 347 347V UNV universal	DP dimming (0-10V) 1%	1 1 circuit 2 2 circuits + E(#) emergency circuit*	CA(#) drywall+cable length (36" std.) CT9(#) TB/TG 9/16+cable length (36" std.) CT15(#) TB/TG15/16+cable length (36" std.) CTS(#) screw slot+cable length (36" std.) SA(#) drywall+stem length <48" (18" std.) CASL(#) drywall cable sloped ceiling SASL(#) drywall stem sloped ceiling
*Additional 5 working days required.					*Specify quantity	See Mounting kit guide for full specification code. Specify quantity


BATTERY (OPT.)	
B(#)	battery pack (integral)
Minimum 5ft; Not available with 347V Please consult factory.	

Refer to specification sheets for complete details. Note that only options shown above qualify for QuickShip+.


How to Specify 90 degree Corners and Patterns

Example

Defining R - Rectangular shape

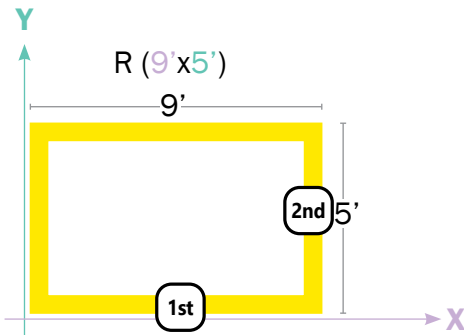


Defining L shape

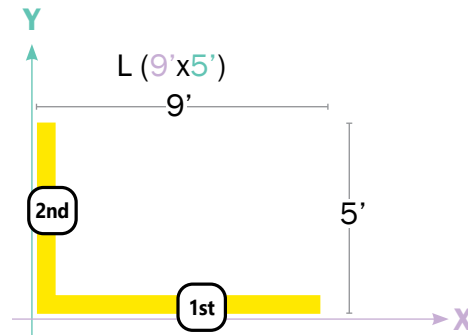


Note: The first number will always define the width, the second - the length.

Defining U shape

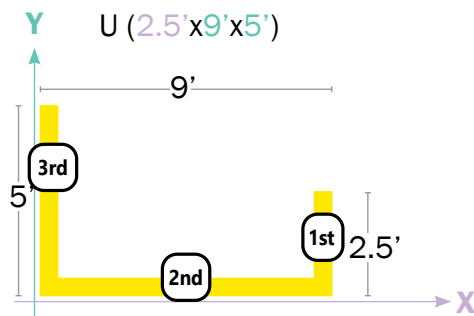

Note: The first number will always define the right arm length, the second - the width, and the third - the left arm length.

Defining S - Square shape

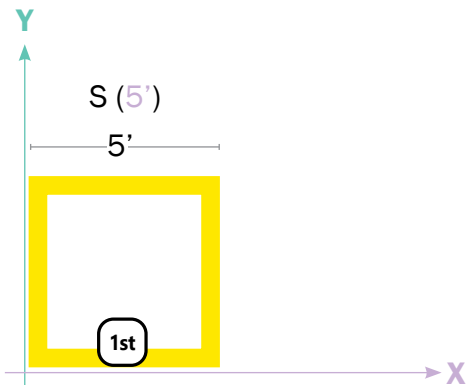

Note: The number will define the width. (All sides are the same length).



A large grid of 30 columns and 40 rows, intended for drawing corner patterns. The grid lines are thin and light gray.