


**\* Please see page 2 for example on how to specify various right angle patterns.**

Project \_\_\_\_\_


Type \_\_\_\_\_

Notes \_\_\_\_\_

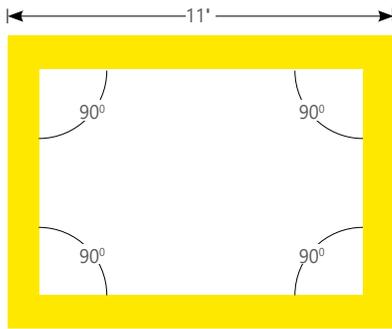

TB4WDLEDPAT	R (11'X8')
PRODUCT ID	PATTERNS AND LENGTH

TOP VIEW - Rectangle Corner Pattern

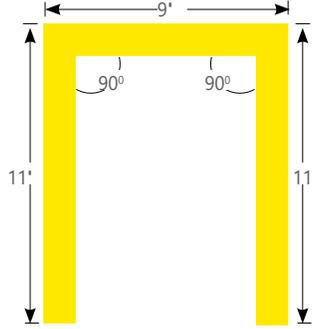

TB4WDLEDPAT	U (9'X11'X11')
PRODUCT ID	PATTERNS AND LENGTH

TOP VIEW - Open Shape Corner Pattern

**IMPORTANT! – all corner patterns must be submitted with drawings indicating dimensions and angles degree.**

Refer to [axislighting.com](http://axislighting.com) for complete fixture details, IES files, and installation instructions



### Ordering Guide

TB4WDLEDPAT		PATTERNS AND LENGTH (SELECT ONE)	LUMENS/FT		CRI		COLOUR TEMP.		SHIELDING DIRECT	
PRODUCT ID										
TB4WDLEDPAT	Beam 4 Wall Direct	<b>S(L)</b> square shape (length) <b>R(LxL)</b> rectangular shape (length) <b>U(LxLxL)</b> U shape (length) <b>L(LxL)</b> L shape (length)	<b>400</b>	400 lm/ft - Min.	<b>80</b>	80 CRI	<b>35</b>	3500 K	<b>SO</b>	spotless lens
			<b>1000</b>	1000 lm/ft - Max for GZ, NW, ASO.*			<b>30</b>	3000 K	<b>ASO</b>	Asymmetric
			<b>1200</b>	1200 lm/ft - Max.			<b>40</b>	4000 K	<b>NW</b>	Narrow
									<b>GZ</b>	Graze
Comes in 90 degree only.			Outputs between listed min and max are available. * 1000 lm/ft max. only for GZ, NW and ASO.							


SPECIFY LENGTH		FINISH	VOLTAGE		DRIVER	CIRCUITS		BATTERY (OPT.)	
<b>NL</b>	nominal	<b>W</b> white	<b>120</b>	120V	<b>DP</b> dimming (0-10V) 1%	<b>1</b>	1 circuit	<b>B(#)</b> battery pack (integral)	
<b>EX</b>	exact	<b>BLK</b> black*	<b>277</b>	277V		<b>2</b>	2 circuits		
		<b>AP</b> aluminum paint*	<b>347</b>	347V		<b>+E(#)</b>	emergency circuit*		
			<b>UNV</b>	universal					
*Additional 5 working days required.						*Specify quantity		Minimum 5ft; Not available with 347V Please consult factory	

**Refer to specification sheets for complete details. Note that only options shown above qualify for QuickShip+.**


## How to Specify 90 degree Corners and Patterns

### Example

#### Defining R - Rectangular shape

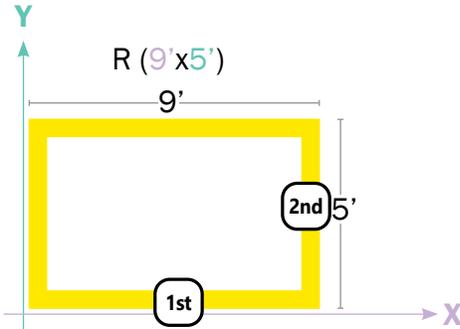


#### Defining L shape

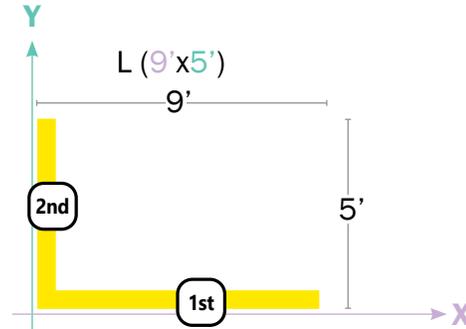


**Note:** The first number will always define the width, the second - the length.

#### Defining U shape

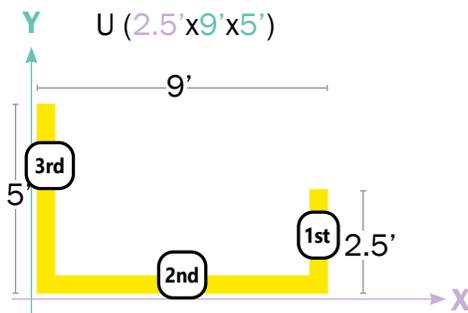

**Note:** The first number will always define the right arm length, the second - the width, and the third - the left arm length.

#### Defining S - Square shape

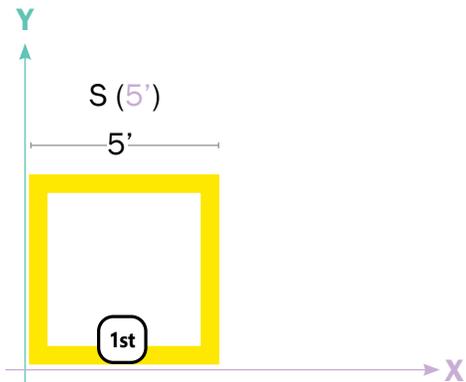

**Note:** The number will define the width. (All sides are the same length).

Refer to specification sheets for complete details. Note that only options shown above qualify for QuickShip+.

**IMPORTANT – all corner patterns must be submitted with drawings indicating dimensions and angles degree.**

