

Stand Alone Decoratives

Luna Orb

PENDANT




Project _____

Type _____

Notes _____

PERFORMANCE PER FIXTURE

NOMINAL LUMEN OUTPUT	INPUT WATTS	EFFICACY
1200 lm	14 W	83 lm/W

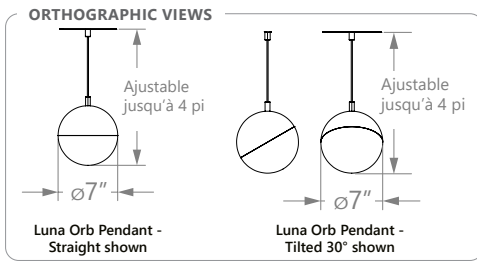

Ordering Guide

LOPD	SO		1200	90			
PRODUCT ID	SHIELDING	ORIENTATION	NOM. LUMENS	CRI	COLOR TEMP.	HOUSING FINISH	VOLTAGE
LOPD Luna Orb Pendant	SO spotless lens	STR straight TLT tilted 30°	1200 1200 lm	90 90 CRI	30 3000 K 35 3500 K 40 4000 K	W white BLK black	UNV universal (120-277V)

DRIVER	MOUNTING	MOUNTING FINISH	PENDANT CABLE LENGTH
DP dimming (0-10V 1% or TRIAC) *	FCP flat stand alone canopy, driver in j-box	BLK black W white	TLA(L) cable length adjustable (specify length between 6" and 140" – includes 18" of additional internal cable for on-site adjustment)
* Triac dimming for line voltage capable (120V voltage only), purple and pink wires need to be capped in that case.	Round canopy used.		Black, plenum rated cable, 1/8" diameter used.

Refer to specification sheets for complete details. Note that only options shown above qualify for QuickShip+.

Patent number: 11,118,765

Product design and development is an ongoing process at Axis Lighting. We reserve the right to change specifications. Contact Axis for the latest product information.

1 / 1
June 15, 2023

FILE NAME:LOPD_QS.SPEC

© 2016 Axis Lighting Inc.
1.800.263.2947
[T] 514.948.6272

axis
axislighting.com