


Project _____

Type _____

Notes _____

PERFORMANCE PER LINEAR FOOT AT 3500K, 80 CRI

NOMINAL LUMEN OUTPUT	INPUT WATTS*	EFFICACY	SHIELDING
500 lm/ft	5.55 W/ft	90 lm/W	FL

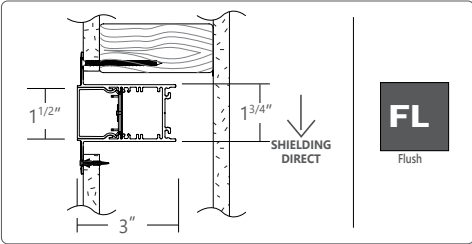

Refer to axislighting.com for complete fixture details, IES files, and installation instructions



Ordering Guide

SCRV								FL										
PRODUCT ID				NOM. LUM/FT DOWN				CRI		COLOR TEMP.		SHIELDING		LINEAR LENGTH (FT)		FINISH		
SCRV	Sculpt Recessed Vertical	300	300 lm/ft - Min				80	80 CRI	30	3000 K		FL	flush	#	4 ft - 12 ft continuous length		W	white
		1000	1000 lm/ft - Max						35	3500 K				S(L)	System Run		BLK	black*
									40	4000 K							AP	aluminum paint*
		Outputs between listed min and max are available.										Lens options use spotless lens		Available in 1" increments.		* Additional 5 working days required.		

VOLTAGE		DRIVER		CIRCUITS		MOUNTING / SUSPENSION		BATTERY (OPTIONAL)		OTHER (OPTIONAL)					
120	120 V	DP	dimming (0-10V) 1%	1	1 circuit	D	drywall flangeless	B(#)	battery pack 4' sections	FW(#)	flex whip (6' std)				
277	277 V			2	2 circuits	DB	slip-through bracket								
347	347 V			+ E(#)	emergency circuit*	DS	drywall spackle flange								
UNV	universal														
				*Specify quantity				Not available with 347V Please consult factory							

Refer to specification sheets for complete details. Note that only options shown above qualify for QuickShip+.