


*** Please see page 2 for example on how to specify various right angle patterns.**

Project _____


Type _____

Notes _____

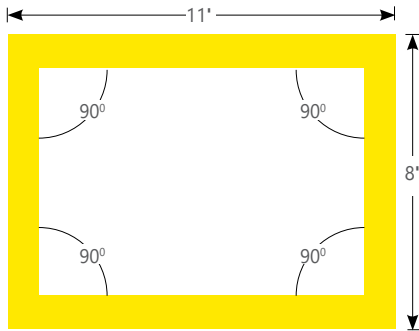

SCDIPAT	R (11'X8')
PRODUCT ID	PATTERNS AND LENGTH

TOP VIEW - Rectangle Corner Pattern



SCDIPAT	U (11'X9'X11')
PRODUCT ID	PATTERNS AND LENGTH

TOP VIEW - Open Shape Corner Pattern

IMPORTANT! – all corner patterns must be submitted with drawings indicating dimensions and angles degree.

Refer to axislighting.com for complete fixture details, IES files, and installation instructions



Ordering Guide

SCDIPAT	PRODUCT ID	PATTERNS AND LENGTH (SELECT ONE)	LUMENS/FT INDIRECT	LUMENS/FT DIRECT	CRI	COLOUR TEMP.	SHIELDING INDIRECT
SCDIPAT	Sculpt Pendant Direct/Indirect Patterns	S(L) square shape (length) R(LxL) rectangular shape (length) U(LxLxL) U shape (length) L(LxL) L shape (length)	300 300 lm/ft - Min. 1000 1000 lm/ft - Max.	300 300 lm/ft - Min. 500 500 lm/ft - Max.	80 80 CRI	35 3500 K 30 3000 K 40 4000 K	SO spotless lens BW batwing
		Comes in 90 degree only.	Outputs between listed min and max are available.				

SHIELDING DIRECT	SPECIFY LENGTH	FINISH	VOLTAGE	DRIVER	CIRCUITS	MOUNTING/SUSPENSION
FL flush RG 0.5" regressed ASO Asymmetric	NL nominal EX exact	W white BLK black* AP aluminum paint*	120 120V 277 277V 347 347V UNV universal	DP dimming (0-10V) 1%	1 1 circuit 2 2 circuits +E(#) emergency circuit*	CA(#) drywall+cable length (36" std.) CT9(#) TB/TG 9/16+cable length (36" std.) CT15(#) TB/TG15/16+cable length (36" std.) CTS(#) screw slot+cable length (36" std.) CASL(#) drywall cable sloped ceiling +SM seismic kit
Lens options use spotless lens		*Additional 5 working days required.			*Specify quantity	See Mounting kit guide for full specification code. Specify length *For stem option, please consult factory.


BATTERY (OPTIONAL)	
B(#)	battery pack
5' minimum. For lengths under 5' battery pack is remote only. Not available with 347V Please consult factory	

Refer to specification sheets for complete details. Note that only options shown above qualify for QuickShip+.


How to Specify 90 degree Corners and Patterns

Example

Defining R - Rectangular shape

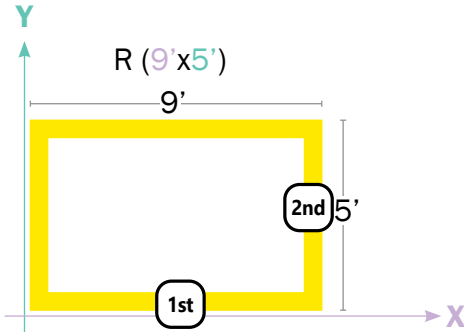


Defining L shape

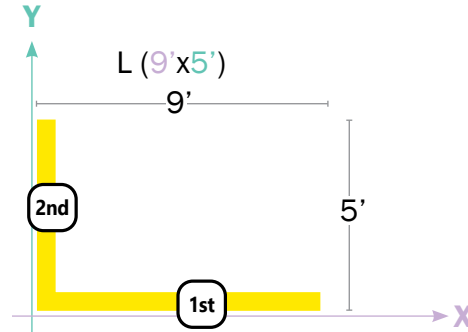


Note: The first number will always define the width, the second - the length.

Defining U shape

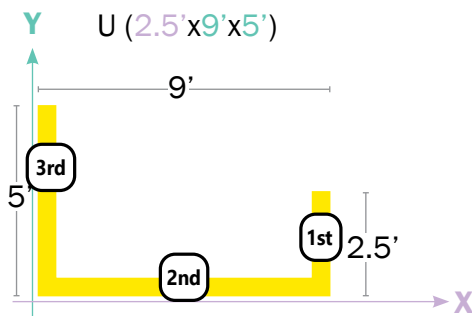

Note: The first number will always define the right arm length, the second - the width, and the third - the left arm length.

Defining S - Square shape

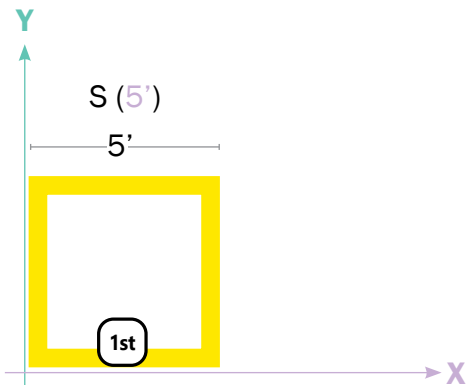

Note: The number will define the width. (All sides are the same length).

IMPORTANT – all corner patterns must be submitted with drawings indicating dimensions and angles degree.



A large grid of squares, intended for drawing corner patterns. The grid is composed of 30 columns and 30 rows of squares, providing a space for technical drawings.