


*** Please see page 2 for example on how to specify various right angle patterns.**

Project _____


Type _____

Notes _____

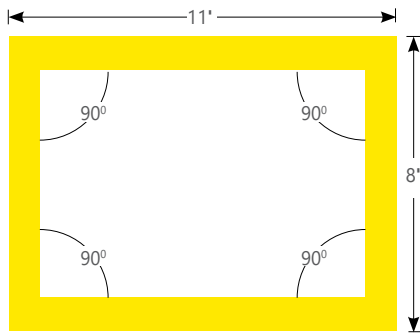

SCWDIPAT	R (11'X8')
PRODUCT ID	PATTERNS AND LENGTH

TOP VIEW - Rectangle Corner Pattern



SCWDIPAT	U (11'X9'X11')
PRODUCT ID	PATTERNS AND LENGTH

TOP VIEW - Open Shape Corner Pattern

IMPORTANT! – all corner patterns must be submitted with drawings indicating dimensions and angles degree.

Refer to axislighting.com for complete fixture details, IES files, and installation instructions

Ordering Guide



SCWDIPAT													
PRODUCT ID		PATTERNS AND LENGTH (SELECT ONE)		LUMENS/FT INDIRECT		LUMENS/FT DIRECT		CRI		COLOUR TEMP.		SHIELDING INDIRECT	
SCWDIPAT	Sculpt Wall Direct/Indirect Patterns	S(L) square shape (length)		300	300 lm/ft - Min.	300	300 lm/ft - Min.	80	80 CRI	30	3000 K	SO	spotless lens
		R(LxL) rectangular shape (length)		1000	1000 lm/ft - Max.	500	500 lm/ft - Max.			35	3500 K		
		U(LxLxL) U shape (length)								40	4000 K		
		L(LxL) L shape (length)											
		Comes in 90 degree only.		Outputs between listed min and max are available.									


SHIELDING DIRECT		SPECIFY LENGTH		FINISH		VOLTAGE		DRIVER		CIRCUITS		BATTERY (OPT.)	
FL	flush	NL	nominal	W	white	120	120V	DP	dimming (0-10V) 1%	1	1 circuit	B(#)	battery pack
RG	0.5" regressed	EX	exact	BLK	black*	277	277V			2	2 circuits		
ASO	Asymmetric			AP	aluminum paint*	347	347V			+E(#)	emergency circuit*		
						UNV	universal						
				*Additional 5 working days required.						*Specify quantity		5' minimum. For lengths under 5' battery pack is remote only. Not available with 347V. Please consult factory	

Refer to specification sheets for complete details. Note that only options shown above qualify for QuickShip+.


How to Specify 90 degree Corners and Patterns

Example

Defining R - Rectangular shape

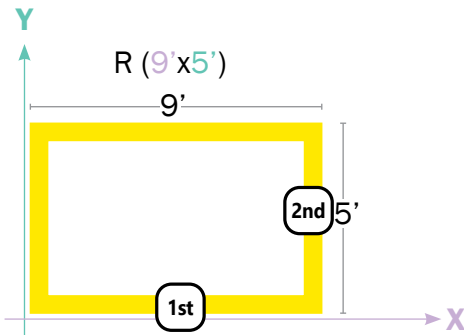


Defining L shape

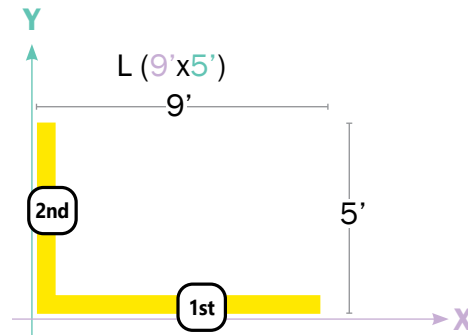


Note: The first number will always define the width, the second - the length.

Defining U shape

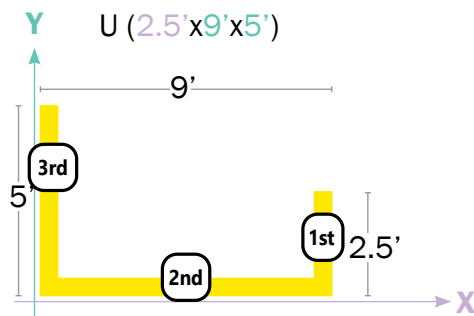

Note: The first number will always define the right arm length, the second - the width, and the third - the left arm length.

Defining S - Square shape

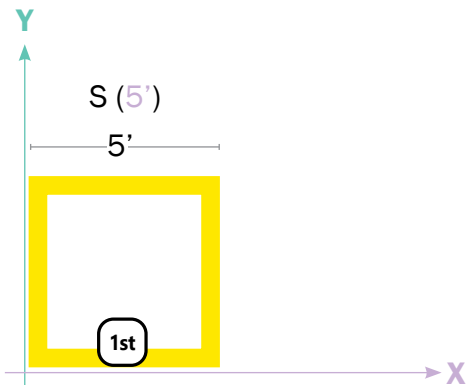

Note: The number will define the width. (All sides are the same length).

IMPORTANT – all corner patterns must be submitted with drawings indicating dimensions and angles degree.



A large grid of squares, intended for drawing corner patterns. The grid is composed of 30 columns and 30 rows of squares, providing a space for technical drawings.