


* Please see page 2 for example on how to specify various right angle patterns.

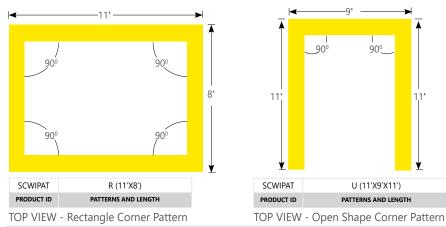

Project _____

Notes

Type

IMPORTANT! - all corner patterns must be submitted with drawings indicating dimensions and angles degree.

Refer to axislighting.com for complete fixture details, IES files, and installation instructions



Ordering Guide

	SCWIPAT													
PRODUCT ID		PATTERNS AND LENGTH (SELECT ONE)			IMENS/FT INDIRECT		CRI	COL	OUR TEMP.		HIELDING NDIRECT	SPECIFY LENGTH		
SCWIPAT	Sculpt Wall Indirect Patterns	R(LxL) U(LxLxL)	square shape (length) rectangular shape (length) U shape (length) L shape (length)		300 lm/ft - Minimum 1000 lm/ft - Maximum	80	80 CRI	30 35 40	3500 K	SO	spotless lens	NL EX	nominal exact	
		Comes in 90 de	gree only.	Output are ava	s between listed min and max ilable.						•			


FINISH		vo	LTAGE		DRIVER		CIRCUITS		BATTERY (OPT.)				
w	white	120	120V	DP	dimming (0-10V) 1%	1	1 circuit	B(#)	battery pack				
BLK	black*	277	277V			2	2 circuits						
AP	aluminum paint*	347	347V			+E(#)	emergency circuit*						
		347 347V UNV universal											
*Additional 5 working days						*Specif	y quantity		5 feet linear length minimum				
required.								required for integral battery; Please consult factory					

• Refer to specification sheets for complete details. Note that only options shown above qualify for QuickShip+.





How to Specify 90 degree Corners and Patterns

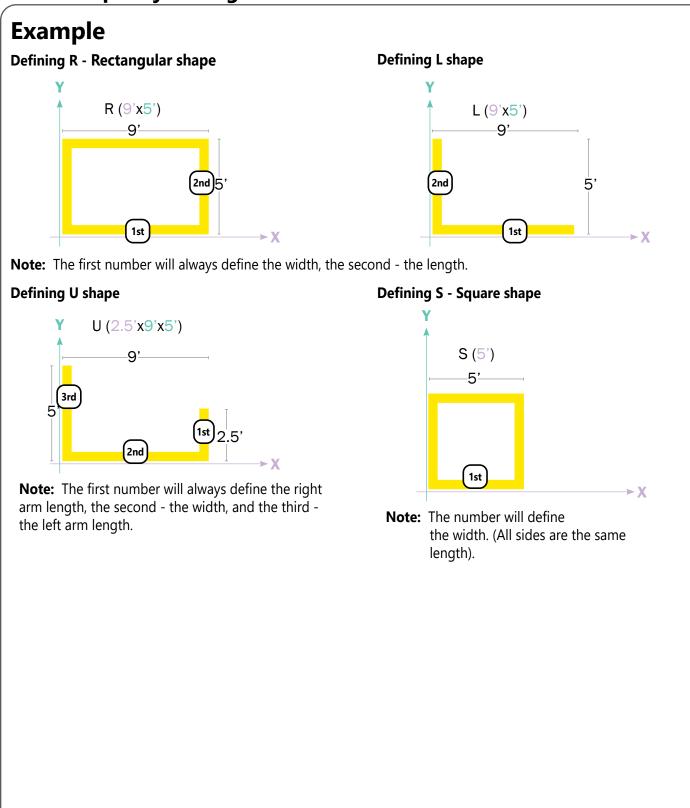

• Refer to specification sheets for complete details. Note that only options shown above qualify for QuickShip+.



				(4								
															_
															_