


* Please see page 2 for example on how to specify various right angle patterns.

Project _____


Type _____

Notes _____

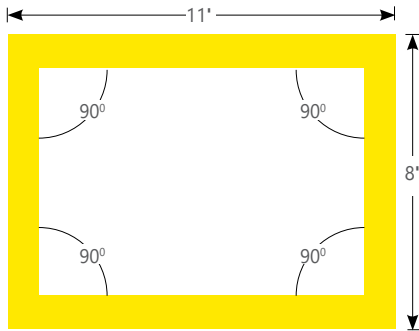

SCRPAT	R (11'X8')
PRODUCT ID	PATTERNS AND LENGTH

TOP VIEW - Rectangle Corner Pattern



SCRPAT	U (11'X9'X11')
PRODUCT ID	PATTERNS AND LENGTH

TOP VIEW - Open Shape Corner Pattern

IMPORTANT! – all corner patterns must be submitted with drawings indicating dimensions and angles degree.

Refer to axislighting.com for complete fixture details, IES files, and installation instructions



Ordering Guide

SCRPAT													
PRODUCT ID		PATTERNS AND LENGTH (SELECT ONE)		LUMENS/FT DIRECT		CRI		COLOUR TEMP.		SHIELDING DIRECT		SPECIFY LENGTH	
SCRPAT	Sculpt Recessed Patterns	S(L)	square shape (length)	300	300 lm/ft - Minimum	80	80 CRI	30	3000 K	FL	flush	NL	nominal
		R(LxL)	rectangular shape (length)	1000	1000 lm/ft - Maximum			35	3500 K	ASO	Asymmetric	EX	exact
		U(LxLxL)	U shape (length)					40	4000 K				
		L(LxL)	L shape (length)										
		Comes in 90 degree only.		Outputs between listed min and max are available.						Lens options use spotless lens.			

FINISH		VOLTAGE		DRIVER		CIRCUITS		MOUNTING				BATTERY (OPT.)	
W	white	120	120 V	DP	dimming	1	1 circuit	MFTB9	MiniFlange t-bar 9/16"	ST	screw slot t-bar	B(#)	battery pack
BLK	black*	277	277 V		(0-10V) 1%	2	2 circuits	MFTB15	MiniFlange t-bar 15/16"	TG9	tegular 9/16"		4' sections
AP	aluminum paint*	347	347 V			+E(#)	emergency circuit*	MFST	MiniFlange screw slot t-bar	TG15	tegular 15/16"		
		UNV	universal					MFTG9	MiniFlange 9/16" t-tegular	DF	drywall flange		
								MFTG15	MiniFlange 15/16" t-tegular	D	drywall flangeless		
								TB9	t-bar 9/16"	DB	slip-through bracket		
								TB15	t-bar 15/16"	DS	drywall spackle flange		
*Additional 5 working days required.						*Specify quantity						Not available with 347V Please consult factory	


OTHER (OPT.)	
FW(#)	flex whip (6' std)
CP	Chicago plenum

Refer to specification sheets for complete details. Note that only options shown above qualify for QuickShip+.


How to Specify 90 degree Corners and Patterns

Example

Defining R - Rectangular shape

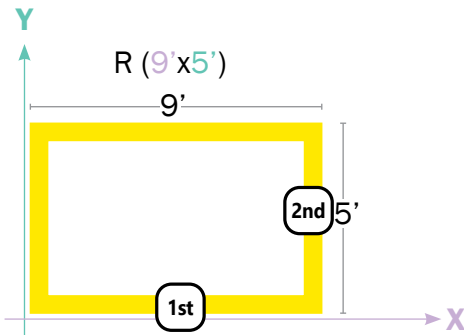


Defining L shape

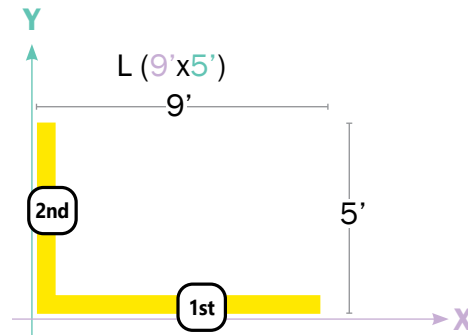


Note: The first number will always define the width, the second - the length.

Defining U shape

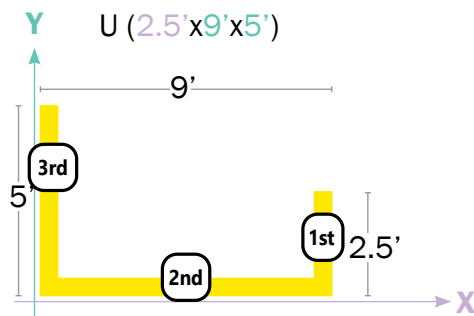

Note: The first number will always define the right arm length, the second - the width, and the third - the left arm length.

Defining S - Square shape

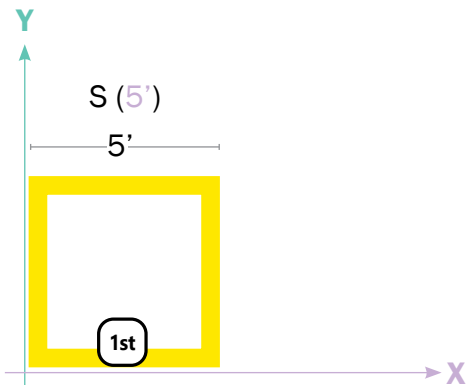

Note: The number will define the width. (All sides are the same length).

IMPORTANT – all corner patterns must be submitted with drawings indicating dimensions and angles degree.



A large grid of squares, intended for drawing corner patterns. The grid is composed of 30 columns and 30 rows of squares, providing a space for technical drawings.