


10 business days



 QuickShip+

Fast, reliable shipment for a wide range of innovative luminaires

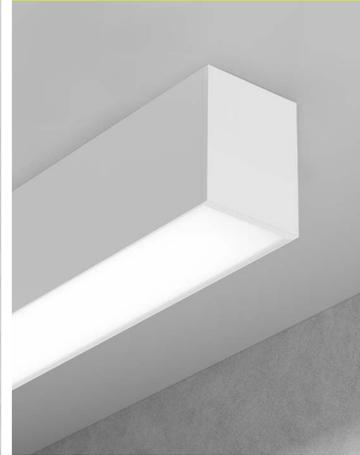

---

- 3 — Introduction
- 4 — Terms and Conditions
- 6 — Linear Pendant
- 23 — Linear Recessed and Recessed Vertical
- 35 — Surface
- 43 — Wall
- 59 — Corners
  - 61 — Linear Pendant - 90° Corners
  - 75 — Linear Recessed - 90° Corners
  - 81 — Surface - 90° Corners
  - 86 — Wall - 90° Corners
- 100 — Decorative Pendant

# CONTENTS

# High quality Excellent service

**10**  
business  
days

## Why the + in QuickShip+?

The Axis Lighting QuickShip+ program was created to offer a broader range of products so you can deliver projects on time, and with the confidence that quality is never compromised.

- ✓ **High-quality aluminum linear products**
- ✓ **More features and specification options to choose from**
- ✓ **Built-to-order LED luminaires that deliver lighting excellence**

**10 business days**



# Terms and Conditions

QuickShip+ is only available for the products described in the most current Axis QuickShip+ brochure. Lead times are **10 Axis business days** and are calculated from the date of an approved purchase order (P.O.) to the ship date.

- One cannot mix QuickShip+ and regular order lines on the same P.O. If an order is received with both standard and QuickShip+ line items, we will ask for separate P.O.s resulting in possible delays.
- QuickShip+ orders are a maximum of US \$50,000.
- Please refer to the specification sheets for further details about each product.  
> Note that only options listed in this document are available as QuickShip+.
- All orders received after 3 pm EST (12 pm PST), on weekends and on holidays, will be processed the next business day. Orders can only be revised or cancelled one business day hours after reception of the original P.O. Order changes of any kind will create a new start date for the QuickShip+ order.
- Shop drawings will be issued one business day hours after receipt of the QuickShip+ P.O., for record purposes only (no approvals required).
- Standard shipping terms will apply. Free shipping on all orders above \$5,000, freight allowance for Hawaii consult factory.
- Corners: Maximum 20 corners per P.O. and include 5 additional days for corners / Paint: Black and Aluminum options are 5 additional days.
- Pricing will be based on your most current Axis QuickShip+ price list.
- Credit on all QuickShip+ orders must be pre-approved.
- Indicate P.O. as QuickShip+ and have only QuickShip+ items on it.
- Enter complete and correct part numbers based on items listed in the current QuickShip+ brochure.
- Send your QuickShip+ orders to your local representative. Subject of the email and P.O. comments: Axis QuickShip+

**Important note: Full product code required in order to accomplish the 10 Axis business days stipulated in the QuickShip+ program.**

# Axis QuickShip+: How to specify?



## 1 Send an email to:

For West territory orders to: **orderswest@axislighting.com**

For Central territory orders to: **orderscentral@axislighting.com**

For National Accounts orders to: **ordersnational@axislighting.com**

For North territory orders to: **ordersnorth@axislighting.com**

For Northeast territory orders to: **ordersnortheast@axislighting.com**

For East territory orders to: **orderseast@axislighting.com**

For Southeast territory orders to: **orderssoutheast@axislighting.com**

For New York and New Jersey orders to: **orders@axislighting.com**

## 2 Include "Axis QuickShip+" as email subject and/or in your P.O. comments

The image shows two sample purchase order forms. The top form is titled 'SAMPLE PURCHASE ORDER' and includes fields for Job Name, Sold To, Ship To, Bill To, Phone, Fax, Freight Terms, Ship Via, Entry Date, and Comments. A red arrow points to the 'Ship Via' field, which contains 'Axis QuickShip+'. The 'Comments' field also contains 'Axis QuickShip+'. The bottom form is identical but includes a table with columns: Type, Part / Description, Quote, Sell Price, Extended, Comm %, Comm \$, Total Overage, Total Due Agency, and Earn %. Below the table is a 'Totals' section with a 'Total Price' field. In both forms, 'Axis QuickShip+' is highlighted in yellow and pointed to by a red arrow.



## Linear Pendant




# Linear Pendant


Our Quickship+ Linear Pendant Lighting Fixtures are readily available lighting solutions that feature elongated designs, allowing for efficient and streamlined illumination in interior spaces. These fixtures ensure prompt delivery, eliminating the need for lengthy production or customization times, making them an ideal choice for projects with tight deadlines or quick installation requirements.

# LINEAR PENDANT


BEAM 2

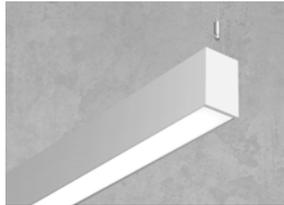


BEAM 2 SQUARE

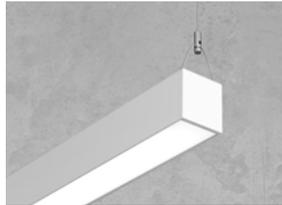


BEAM 3

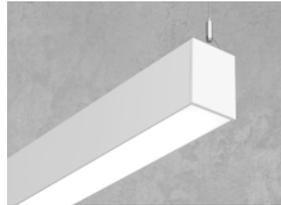


BEAM 4

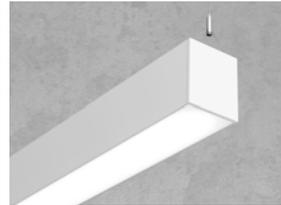

BEAM 6

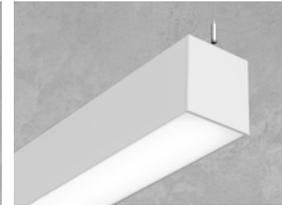

SCULPT

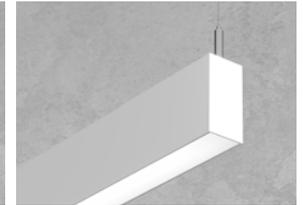

## OPTIONS


Distribution	Direct - Indirect - Direct / Indirect	Direct - Indirect	Direct - Indirect - Direct / Indirect	Direct - Indirect - Direct / Indirect	Direct - Indirect - Direct / Indirect	Direct - Indirect
Lumens	300lm/ft min - 1000lm/ft max Down 300lm/ft min - 1100lm/ft max Up	300lm/ft - 1000lm/ft Down 300lm/ft - 1100lm/ft Up	300lm/ft - 1100lm/ft Down 300lm/ft - 1200lm/ft Up	400lm/ft - 1200lm/ft Down 400lm/ft - 1200lm/ft Up	400lm/ft - 1200lm/ft	300lm/ft min - 1000lm/ft max Down 300lm/ft min - 1000lm/ft max Up
CRI	80	80	80	80	80	80
CCT	3000K - 3500K - 4000K	3000K - 3500K - 4000K	3000K - 3500K - 4000K	3000K - 3500K - 4000K	3000K - 3500K - 4000K	3000K - 3500K - 4000K
Shielding Down	Spotless Lens / Asymmetric / Batwing / Narrow / Graze / Wall Wash	Spotless Lens / Asymmetric / Batwing / Narrow / Graze / Wall Wash	Spotless Lens / Asymmetric / Batwing / Narrow / Graze / Wall Wash	Spotless Lens / Asymmetric / Batwing / Narrow / Graze / Wall Wash	Spotless lens	Flush / Regressed / Asymmetric
Shielding Up	Spotless Lens / Batwing	N/A	Spotless Lens / Batwing	N/A	Spotless lens	Spotless Lens / Batwing
Length	4ft to 12ft - System run	4ft to 12ft - System run	4ft to 12ft - System run	4ft to 12ft - System run	4ft to 12ft - System run	4ft to 12ft - System run
Finish	White / Black <sup>(1)</sup> / Aluminum <sup>(1)</sup>	White / Black <sup>(1)</sup> / Aluminum <sup>(1)</sup>	White / Black <sup>(1)</sup> / Aluminum <sup>(1)</sup>	White / Black <sup>(1)</sup> / Aluminum <sup>(1)</sup>	White / Black <sup>(1)</sup> / Aluminum <sup>(1)</sup>	White / Black <sup>(1)</sup> / Aluminum <sup>(1)</sup>
Voltage	120V / 277V / 347V / UNV	120V / 277V / 347V / UNV	120V / 277V / 347V / UNV	120V / 277V / 347V / UNV	120V / 277V / 347V / UNV	120V / 277V / 347V / UNV
Driver	Dimming (0-10V) 1%	Dimming (0-10V) 1%	Dimming (0-10V) 1%	Dimming (0-10V) 1%	Dimming (0-10V) 1%	Dimming (0-10V) 1%
Circuits	1, 2	1, 2	1, 2	1, 2	1, 2	1, 2
Mounting	Drywall / T-bar / Tegular	Drywall / T-bar / Tegular	Drywall / T-bar / Tegular	Drywall / T-bar / Tegular	Drywall / T-bar / Tegular	Drywall / T-bar / Tegular

(1) Additional 5 business days required.

## OPTIONAL

Battery	Battery pack					
---------	--------------	--------------	--------------	--------------	--------------	--------------

# Beam 2

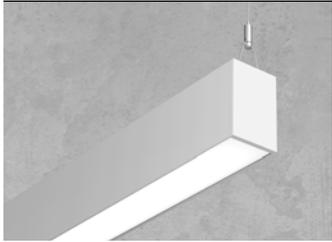

**Beam 2:** for a clean, uniform, continuous end-to-end luminous effect from a best-selling linear luminaire that naturally complements any architectural design with minimal intrusion. Available with multiple lengths and lumen packages to provide the right amount of light for the allowed wattage.

10 business days

 [Click here for the spec sheet.](#)




## Ordering Guide

TB2DILED		NOMINAL LUMENS/FT UP		NOMINAL LUMENS/FT DOWN		CRI		COLOR TEMP.		SHIELDING INDIRECT		SHIELDING DIRECT		LENGTH (FT)	
<b>TB2DILED</b>	Beam 2 - Pendant Direct/Indirect LED	<b>300</b>	300 lm/ft - Minimum	<b>300</b>	300 lm/ft - Minimum	<b>80</b>	80 CRI	<b>30</b>	3000 K	<b>SO</b>	spotless lens	<b>SO</b>	spotless lens	<b>4</b>	4'
		<b>1100</b>	1100 lm/ft - Maximum	<b>750</b>	750 lm/ft - max for GZ, NW, WW, ASO*			<b>35</b>	3500 K	<b>BW</b>	batwing	<b>ASO</b>	Asymmetric	<b>5</b>	5'
				<b>1000</b>	1000 lm/ft - max			<b>40</b>	4000 K			<b>BW</b>	Batwing	<b>8</b>	8'
												<b>NW</b>	Narrow	<b>12</b>	12'
												<b>GZ</b>	Graze flush	<b>S(L)</b>	System Run
												<b>WW</b>	Wallwash flush		
		Outputs between listed min and max are available.		Outputs between listed min and max are available. * 750 lm/ft max. only for GZ, NW, WW and ASO.										Available in 1' increments.	

FINISH		VOLTAGE		DRIVER		CIRCUITS		MOUNTING/SUSPENSION				BATTERY (OPT.)	
<b>W</b>	white	<b>120</b>	120 V	<b>DP</b>	dimming (0-10V) 1%	<b>1</b>	1 circuit	<b>CA(#)</b>	drywall+cable length (36" std.)			<b>B(#)</b>	battery pack
<b>BLK</b>	black*	<b>277</b>	277 V			<b>2</b>	2 circuits	<b>CT9(#)</b>	TB/TG 9/16+cable length (36" std.)				(integral)
<b>AP</b>	aluminium paint*	<b>347</b>	347 V			<b>+E(#)</b>	emergency circuit	<b>CT15(#)</b>	TB/TG 15/16+cable length (36" std.)				
		<b>UNV</b>	universal					<b>CTS(#)</b>	screw slot+cable length (36" std.)				
								<b>SA(#)</b>	drywall+stem length <48" (18" std.)				
								<b>CASL(#)</b>	drywall cable sloped ceiling				
								<b>SASL(#)</b>	drywall stem sloped ceiling				
*Additional 5 business days required.								<a href="https://www.axislighting.com/download_file/9461/0">See Mounting kit guide for full specification code. https://www.axislighting.com/download_file/9461/0</a> White canopy standard				Minimum 5ft. Not available with 347V Please consult factory.	

# Beam 2

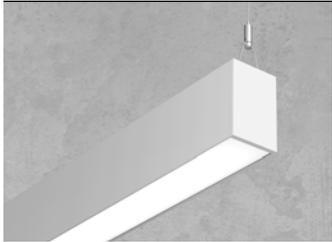

**Beam 2:** for a clean, uniform, continuous end-to-end luminous effect from a best-selling linear luminaire that naturally complements any architectural design with minimal intrusion. Available with multiple lengths and lumen packages to provide the right amount of light for the allowed wattage.

10 business days

 [Click here for the spec sheet.](#)




## Ordering Guide

TB2DLED		NOM. LUM/FT DOWN		CRI	COLOR TEMP.	SHIELDING	LENGTH (FT)	FINISH
<b>TB2DLED</b>	Beam 2 - Pendant Direct LED	<b>300</b>	300 lm/ft - min	<b>80</b>	80 CRI	<b>SO</b> spotless lens	<b>4</b> 4'	<b>W</b> white
		<b>750</b>	750 lm/ft - max for GZ, NW, WW, ASO.*		<b>30</b> 3000 K <b>35</b> 3500 K <b>40</b> 4000 K	<b>BW</b> Batwing (flush only) <b>GZ</b> Graze (flush only) <b>NW</b> Narrow (flush only) <b>WW</b> Wallwash (flush only) <b>ASO</b> Asymmetric (flush only)	<b>5</b> 5' <b>8</b> 8' <b>12</b> 12' <b>S(L)</b> System Run	<b>BLK</b> black* <b>AP</b> aluminum paint*
		Outputs between listed min and max are available. * 750 lm/ft max. only for GZ, NW, WW and ASO.				Choose only one of the options above	Available in 1' increments.	*Additional 5 business days required.

VOLTAGE	DRIVER	CIRCUITS	MOUNTING/SUSPENSION	BATTERY (OPT.)
<b>120</b> 120 V	<b>DP</b> dimming (0-10V) 1%	<b>1</b> 1 circuit	<b>CA(#)</b> drywall+cable length (36" std.)	<b>B(#)</b> battery pack (integral)
<b>277</b> 277 V		<b>2</b> 2 circuits	<b>CT9(#)</b> TB/TG 9/16+cable length (36" std.)	
<b>347</b> 347 V		<b>+E(#)</b> emergency circuit	<b>CT15(#)</b> TB/TG15/16+cable length (36" std.)	
<b>UNV</b> universal			<b>CTS(#)</b> screw slot+cable length (36" std.)	
			<b>SA(#)</b> drywall+stem length <48" (18" std.)	
			<b>CASL(#)</b> drywall cable sloped ceiling	
			<b>SASL(#)</b> drywall stem sloped ceiling	
			<a href="https://www.axislighting.com/download_file/9461/0">See Mounting kit guide for full specification code.</a> <a href="https://www.axislighting.com/download_file/9461/0">https://www.axislighting.com/download_file/9461/0</a> White canopy standard	Minimum 5ft; Not available with 347V Please consult factory.

# Beam 2

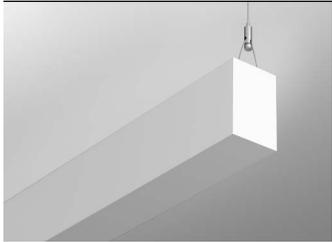

**Beam 2:** for a clean, uniform, continuous end-to-end luminous effect from a best-selling linear luminaire that naturally complements any architectural design with minimal intrusion. Available with multiple lengths and lumen packages to provide the right amount of light for the allowed wattage.

10 business days

 [Click here for the spec sheet.](#)




## Ordering Guide

TB2ILED		NOM. LUM/FT UP		CRI		COLOR TEMP.		SHIELDING		LENGTH (FT)		FINISH		VOLTAGE	
<b>TB2ILED</b>	Beam 2 - Pendant Indirect LED	<b>300</b>	300 lm/ft-Min	<b>80</b>	80 CRI	<b>30</b>	3000 K	<b>SO</b>	spotless lens	<b>4</b>	4'	<b>W</b>	white	<b>120</b>	120 V
		<b>1100</b>	1100 lm/ft-Max			<b>35</b>	3500 K	<b>BW</b>	batwing	<b>5</b>	5'	<b>BLK</b>	black*	<b>277</b>	277 V
						<b>40</b>	4000 K			<b>8</b>	8'	<b>AP</b>	aluminum paint*	<b>347</b>	347 V
										<b>12</b>	12'			<b>UNV</b>	universal
										<b>S(#)</b>	System Run				
		Outputs between listed min and max are available.				Choose only one of the options above.				Available in 1' increments.		*Additional 5 business days required.			

DRIVER	CIRCUITS	MOUNTING/SUSPENSION		BATTERY (OPT.)	
<b>DP</b> dimming (0-10V) 1%	<b>1</b> 1 circuit <b>2</b> 2 circuits <b>+E(#)</b> emergency circuit	<b>CA(#)</b> drywall+cable length (36" std.) <b>CT9(#)</b> TB/TG 9/16+cable length (36" std.) <b>CT15(#)</b> TB/TG15/16+cable length (36" std.) <b>CTS(#)</b> screw slot+cable length (36" std.) <b>SA(#)</b> drywall+stem length <48" (18" std.) <b>CASL(#)</b> drywall cable sloped ceiling <b>SASL(#)</b> drywall stem sloped ceiling	<b>B(#)</b> battery pack (integral)		
		<a href="#">See Mounting kit guide for full specification code.</a> <a href="https://www.axislighting.com/download_file/9461/0">https://www.axislighting.com/download_file/9461/0</a> White canopy standard		Minimum 5ft; Not available with 347V Please consult factory.	

# Beam 2 Square

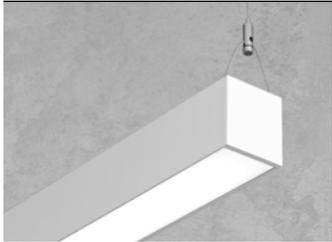

**Beam 2 Square:** is a highly esthetic, compact 2.5 in. square. Its powerful, glare-free illumination is well-suited to modern environments.

**10 business days**

 [Click here for the spec sheet.](#)




## Ordering Guide

B2SQDLED		NOM. LUMENS/FT		CRI		COLOR TEMP.		SHIELDING		LENGTH		FINISH		VOLTAGE	
PRODUCT ID															
B2SQDLED	Beam 2 Square Pendant Direct	300	300 lm/ft - min	80	80 CRI	30	3000 K	SO	spotless lens	4	4'	W	white	120	120 V
		750	750 lm/ft - max for GZ, NW, WW, ASO*			35	3500 K	ASO	asymmetric, flush only	5	5'	BLK	black*	277	277 V
						40	4000 K	BW	batwing, flush only	6	6'	AP	aluminum paint*	347	347 V
		1000	1000 lm/ft - max					NW	narrow, flush only	8	8'			UNV	universal
								GZ	graze, flush only	12	12'				
								WW	wallwash, flush only	S(L) system run					
		Outputs between listed min and max are available. * 750 lm/ft max. only for GZ, NW, WW and ASO.								Available in 1' increments.		*Additional 5 business days required.			

DRIVER		CIRCUITS		MOUNTING/SUSPENSION			BATTERY (OPT.)	
DP	dimming (0-10V) 1%	1	1 circuit	CA(#)	drywall+cable length (36" std.)		B(#)	battery pack (integral)
		2	2 circuits	CT9(#)	TB/TG 9/16+cable length (36" std.)			
		+E(#)	emergency circuit	CT15(#)	TB/TG15/16+cable length (36" std.)			
				CTS(#)	screw slot+cable length (36" std.)			
				SA(#)	drywall+stem length <48" (18" std.)			
				CASL(#)	drywall cable sloped ceiling			
				SASL(#)	drywall stem sloped ceiling			
				<a href="https://www.axislighting.com/download_file/9461/0">See Mounting kit guide for full specification code.</a> <a href="https://www.axislighting.com/download_file/9461/0">https://www.axislighting.com/download_file/9461/0</a> White canopy standard			Minimum 4ft; Please consult factory.	

# Beam 3

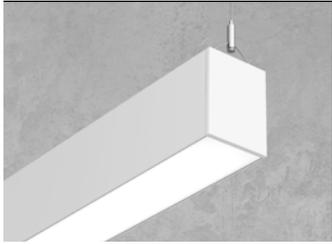

**Beam 3:** for a clean, uniform, continuous end-to-end luminous effect from a best-selling linear luminaire that naturally complements any architectural design with minimal intrusion. Available with multiple lengths and lumen packages to provide the right amount of light for the allowed wattage.

**10 business days**

 [Click here for the spec sheet.](#)




## Ordering Guide

TB3DILED		NOM. LUM/FT UP		NOM. LUM/FT DOWN		CRI		COLOR TEMP.		SHIELDING INDIRECT		SHIELDING DIRECT	
<b>TB3DILED</b>	BEAM 3 - Pendant Direct/Indirect LED	<b>300</b>	300 lm/ft-Min	<b>300</b>	300 lm/ft - min	<b>80</b>	80 CRI	<b>30</b>	3000 K	<b>SO</b>	spotless lens	<b>SO</b>	spotless lens
		<b>1200</b>	1200 lm/ft-Max	<b>1000</b>	1000 lm/ft - max for GZ, NW, WW, ASO*			<b>35</b>	3500 K	<b>BW</b>	batwing	<b>ASO</b>	Asymmetric
				<b>1100</b>	1100 lm/ft - max			<b>40</b>	4000 K			<b>BW</b>	Batwing
												<b>NW</b>	Narrow
												<b>GZ</b>	Graze
												<b>WW</b>	Wallwash
		Outputs between listed min and max are available.		Outputs between listed min and max are available. * 1000 lm/ft max. only for GZ, NW, WW and ASO.									

LENGTH (FT)	FINISH	VOLTAGE	DRIVER	CIRCUITS	MOUNTING/SUSPENSION	BATTERY (OPTIONAL)
<b>4</b> 4'	<b>W</b> white	<b>120</b> 120 V	<b>DP</b> dimming (0-10V) 1%	<b>1</b> 1 circuit	<b>CA(#)</b> drywall+cable length (36" std.)	<b>B(#)</b> battery pack (integral)
<b>5</b> 5'	<b>BLK</b> black*	<b>277</b> 277 V		<b>2</b> 2 circuits	<b>CT9(#)</b> TB/TG 9/16+cable length (36" std.)	
<b>6</b> 6'	<b>AP</b> aluminum paint*	<b>347</b> 347 V		<b>+E(#)</b> emergency circuit	<b>CT15(#)</b> TB/TG15/16+cable length (36" std.)	
<b>8</b> 8'		<b>UNV</b> universal			<b>CTS(#)</b> screw slot+cable length (36" std.)	
<b>12</b> 12'					<b>SA(#)</b> drywall+stem length <48" (18" std.)	
<b>S(L)</b> System Run					<b>CASL(#)</b> drywall cable sloped ceiling	
					<b>SASL(#)</b> drywall stem sloped ceiling	
Available in 1' increments.	*Additional 5 business days required.				<a href="https://www.axislighting.com/download_file/9461/0">See Mounting kit guide for full specification code. https://www.axislighting.com/download_file/9461/0</a> White canopy standard	Minimum 5ft; Not available with 347V Please consult factory.

# Beam 3

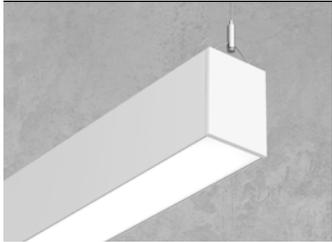

**Beam 3:** for a clean, uniform, continuous end-to-end luminous effect from a best-selling linear luminaire that naturally complements any architectural design with minimal intrusion. Available with multiple lengths and lumen packages to provide the right amount of light for the allowed wattage.

10 business days

 [Click here for the spec sheet.](#)




## Ordering Guide

TB3DLED		NOM. LUM/FT DOWN		CRI		COLOR TEMP.		SHIELDING		LENGTH (FT)		FINISH	
<b>TB3DLED</b>	BEAM 3 - Pendant Direct LED	<b>300</b>	300 lm/ft - min	<b>80</b>	80 CRI	<b>30</b>	3000 K	<b>SO</b>	spotless lens	<b>4</b>	4'	<b>W</b>	white
		<b>1000</b>	1000 lm/ft - max for GZ, NW, WW, ASO.*			<b>35</b>	3500 K	<b>ASO</b>	Asymmetric	<b>5</b>	5'	<b>BLK</b>	black*
		<b>1100</b>	1100 lm/ft - max			<b>40</b>	4000 K	<b>BW</b>	Batwing	<b>6</b>	6'	<b>AP</b>	aluminum paint*
								<b>NW</b>	Narrow	<b>8</b>	8'		
								<b>GZ</b>	Graze	<b>12</b>	12'		
								<b>WW</b>	Wallwash	<b>S(L)</b>	System Run		
		Outputs between listed min and max are available. * 1000 lm/ft max. only for GZ, NW, WW and ASO.						Lens options use spotless lens. Choose only one of the options above.		Available in 1' increments.		*Additional 5 business days required.	

VOLTAGE		DRIVER		CIRCUITS		MOUNTING				BATTERY (OPTIONAL)	
<b>120</b>	120 V	<b>DP</b>	dimming (0-10V) 1%	<b>1</b>	1 circuit	<b>CA(#)</b>	drywall+cable length (36" std.)			<b>B(#)</b>	battery pack (integral)
<b>277</b>	277 V			<b>2</b>	2 circuits	<b>CT9(#)</b>	TB/TG 9/16+cable length (36" std.)				
<b>347</b>	347 V			<b>+E(#)</b>	emergency circuit	<b>CT15(#)</b>	TB/TG15/16+cable length (36" std.)				
<b>UNV</b>	universal					<b>CTS(#)</b>	screw slot+cable length (36" std.)				
						<b>SA(#)</b>	drywall+stem length <48" (18" std.)				
						<b>CASL(#)</b>	drywall cable sloped ceiling				
						<b>SASL(#)</b>	drywall stem sloped ceiling				
						<a href="https://www.axislighting.com/download_file/9461/0">See Mounting kit guide for full specification code.</a> <a href="https://www.axislighting.com/download_file/9461/0">https://www.axislighting.com/download_file/9461/0</a> White canopy standard				Minimum 5ft. Not available with 347V Please consult factory.	

# Beam 3

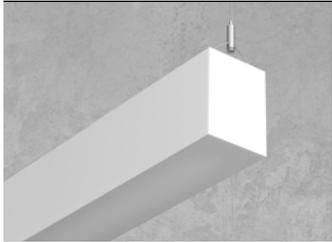

**Beam 3:** for a clean, uniform, continuous end-to-end luminous effect from a best-selling linear luminaire that naturally complements any architectural design with minimal intrusion. Available with multiple lengths and lumen packages to provide the right amount of light for the allowed wattage.

**10 business days**

 [Click here for the spec sheet.](#)




## Ordering Guide

TB3ILED		NOM. LUM/FT UP		CRI		COLOR TEMP.		SHIELDING		LENGTH (FT)		FINISH	
<b>TB3ILED</b>	BEAM 3 Pendant Indirect LED	<b>300</b>	300 lm/ft - Minimum	<b>80</b>	80 CRI	<b>30</b>	3000 K	<b>SO</b>	spotless lens	<b>4</b>	4'	<b>W</b>	white
		<b>1200</b>	1200 lm/ft - Maximum			<b>35</b>	3500 K	<b>BW</b>	Batwing	<b>5</b>	5'	<b>BLK</b>	black*
						<b>40</b>	4000 K			<b>6</b>	6'	<b>AP</b>	aluminum paint*
										<b>8</b>	8'		
										<b>12</b>	12'		
										<b>S(L)</b>	System Run		
		Outputs between listed min and max are available.								Available in 1' increments.		*Additional 5 business days required.	

VOLTAGE		DRIVER		CIRCUITS		MOUNTING				BATTERY (OPTIONAL)	
<b>120</b>	120 V	<b>DP</b>	dimming (0-10V) 1%	<b>1</b>	1 circuit	<b>CA(#)</b>	drywall+cable length (36" std.)			<b>B(#)</b>	battery pack (integral)
<b>277</b>	277 V			<b>2</b>	2 circuits	<b>CT9(#)</b>	TB/TG 9/16+cable length (36" std.)				
<b>347</b>	347 V			<b>+E(#)</b>	emergency circuit	<b>CT15(#)</b>	TB/TG15/16+cable length (36" std.)				
<b>UNV</b>	universal					<b>CTS(#)</b>	screw slot+cable length (36" std.)				
						<b>SA(#)</b>	drywall+stem length <48" (18" std.)				
						<b>CASL(#)</b>	drywall cable sloped ceiling				
						<b>SASL(#)</b>	drywall stem sloped ceiling				
						<a href="https://www.axislighting.com/download_file/9461/0">See Mounting kit guide for full specification code.</a> <a href="https://www.axislighting.com/download_file/9461/0">https://www.axislighting.com/download_file/9461/0</a> White canopy standard				Minimum 5ft; Not available with 347V Please consult factory.	


# Beam 4

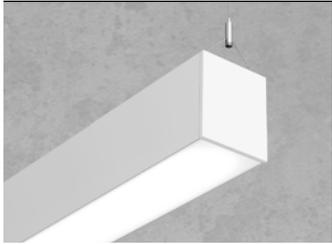

**Beam 4:** for a clean, uniform, continuous end-to-end luminous effect from a best-selling linear luminaire that naturally complements any architectural design with minimal intrusion. Available with multiple lengths and lumen packages to provide the right amount of light for the allowed wattage.

10 business days

 [Click here for the spec sheet.](#)




## Ordering Guide

TB4DILED		NOM. LUM/FT UP		NOM. LUM/FT DOWN		CRI		COLOR TEMP.		SHIELDING INDIRECT		SHIELDING DIRECT	
<b>TB4DILED</b>	BEAM 4 - Pendant Direct/Indirect LED	<b>400</b>	400 lm/ft - Min. <b>1200</b> 1200 lm/ft - Max.	<b>400</b>	400 lm/ft - Min. <b>1000</b> 1000 lm/ft - Max for GZ, NW, WW, ASO.* <b>1200</b> 1200 lm/ft - Max.	<b>80</b>	80 CRI	<b>30</b>	3000 K <b>35</b> 3500 K <b>40</b> 4000 K	<b>SO</b> spotless lens <b>BW</b> batwing	<b>SO</b> spotless lens <b>ASO</b> Asymmetric <b>BW</b> Batwing <b>NW</b> Narrow <b>GZ</b> Graze <b>WW</b> Wallwash		
		Outputs between listed min and max are available.		Outputs between listed min and max are available. * 1000 lm/ft max. only for GZ, NW, WW and ASO.									

LENGTH (FT)	FINISH	VOLTAGE	DRIVER	CIRCUITS	MOUNTING/SUSPENSION	BATTERY (OPTIONAL)
4 4'	<b>W</b> white	<b>120</b> 120 V	<b>DP</b> dimming (0-10V) 1%	<b>1</b> 1 circuit	<b>CA(#)</b> drywall+cable length (36" std.)	<b>B(#)</b> battery pack (integral)
5 5'	<b>BLK</b> black*	<b>277</b> 277 V		<b>2</b> 2 circuits	<b>CT9(#)</b> TB/TG 9/16+cable length (36" std.)	
6 6'	<b>AP</b> aluminum paint*	<b>347</b> 347 V		<b>+E(#)</b> emergency circuit	<b>CT15(#)</b> TB/TG15/16+cable length (36" std.)	
8 8'		<b>UNV</b> universal			<b>CTS(#)</b> screw slot+cable length (36" std.)	
12 12'					<b>SA(#)</b> drywall+stem length <48" (18" std.)	
<b>S(L)</b> System Run				<b>CASL(#)</b> drywall cable sloped ceiling <b>SASL(#)</b> drywall stem sloped ceiling		
Available in 1' increments.	*Additional 5 business days required.				<a href="https://www.axislighting.com/download_file/9461/0">See Mounting kit guide for full specification code. https://www.axislighting.com/download_file/9461/0</a> White canopy standard	Minimum 5ft; Not available with 347V Please consult factory.

# Beam 4

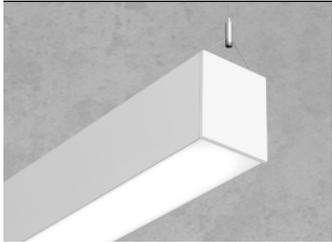

**Beam 4:** for a clean, uniform, continuous end-to-end luminous effect from a best-selling linear luminaire that naturally complements any architectural design with minimal intrusion. Available with multiple lengths and lumen packages to provide the right amount of light for the allowed wattage.

**10 business days**

 [Click here for the spec sheet.](#)




## Ordering Guide

TB4DLED		NOM. LUM/FT DOWN		CRI		COLOR TEMP.		SHIELDING		LENGTH (FT)		FINISH	
<b>TB4DLED</b>	BEAM 4 - Pendant Direct LED	<b>400</b>	400 lm/ft - Minimum	<b>80</b>	80 CRI	<b>30</b>	3000 K	<b>SO</b>	spotless lens	<b>4</b>	4'	<b>W</b>	white
		<b>1000</b>	1000 lm/ft - max for GZ, NW, WW, ASO.*			<b>35</b>	3500 K	<b>ASO</b>	Asymmetric	<b>5</b>	5'	<b>BLK</b>	black*
		<b>1200</b>	1200 lm/ft - Maximum			<b>40</b>	4000 K	<b>BW</b>	Batwing	<b>6</b>	6'	<b>AP</b>	aluminum paint*
								<b>NW</b>	Narrow	<b>8</b>	8'		
								<b>GZ</b>	Graze	<b>12</b>	12'		
								<b>WW</b>	Wallwash	<b>S(L)</b>	System Run		
		Outputs between listed min and max are available. * 1000 lm/ft max. only for GZ, NW, WW and ASO.				Lens options use spotless lens. Choose only one of the options above.				Available in 1' increments.		*Additional 5 business days required.	

VOLTAGE		DRIVER		CIRCUITS		MOUNTING				BATTERY (OPTIONAL)	
<b>120</b>	120 V	<b>DP</b>	dimming (0-10V) 1%	<b>1</b>	1 circuit	<b>CA(#)</b>	drywall+cable length (36" std.)			<b>B(#)</b>	battery pack (integral)
<b>277</b>	277 V			<b>2</b>	2 circuits	<b>CT9(#)</b>	TB/TG 9/16+cable length (36" std.)				
<b>347</b>	347 V			<b>+E(#)</b>	emergency circuit	<b>CT15(#)</b>	TB/TG15/16+cable length (36" std.)				
<b>UNV</b>	universal					<b>CTS(#)</b>	screw slot+cable length (36" std.)				
						<b>SA(#)</b>	drywall+stem length <48" (18" std.)				
						<b>CASL(#)</b>	drywall cable sloped ceiling				
						<b>SASL(#)</b>	drywall stem sloped ceiling				
						<a href="https://www.axislighting.com/download_file/9461/0">See Mounting kit guide for full specification code. https://www.axislighting.com/download_file/9461/0</a> White canopy standard				Minimum 5ft. Not available with 347V Please consult factory.	

# Beam 4

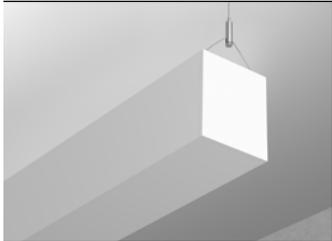

**Beam 4:** for a clean, uniform, continuous end-to-end luminous effect from a best-selling linear luminaire that naturally complements any architectural design with minimal intrusion. Available with multiple lengths and lumen packages to provide the right amount of light for the allowed wattage.

**10 business days**

 [Click here for the spec sheet.](#)




## Ordering Guide

TB4ILED		NOM. LUM/FT UP		CRI		COLOR TEMP.		SHIELDING		LENGTH (FT)		FINISH	
<b>TB4ILED</b>	BEAM 4 Pendant Indirect LED	<b>400</b>	400 lm/ft - Minimum	<b>80</b>	80 CRI	<b>30</b>	3000 K	<b>SO</b>	spotless lens	<b>4</b>	4'	<b>W</b>	white
		<b>1200</b>	1200 lm/ft - Maximum			<b>35</b>	3500 K	<b>BW</b>	Batwing	<b>5</b>	5'	<b>BLK</b>	black*
						<b>40</b>	4000 K			<b>6</b>	6'	<b>AP</b>	aluminum paint*
										<b>8</b>	8'		
										<b>12</b>	12'		
										<b>S(L)</b>	System Run		
		Outputs between listed min and max are available.								Available in 1' increments.		*Additional 5 business days required.	

VOLTAGE		DRIVER		CIRCUITS		MOUNTING			BATTERY (OPTIONAL)	
<b>120</b>	120 V	<b>DP</b>	dimming (0-10V) 1%	<b>1</b>	1 circuit	<b>CA(#)</b>	drywall+cable length (36"std)		<b>B(#)</b>	battery pack (integral)
<b>277</b>	277 V			<b>2</b>	2 circuits	<b>CT9(#)</b>	TB/TG 9/16+cable length (36" std.)			
<b>347</b>	347 V			<b>+E(#)</b>	emergency circuit	<b>CT15(#)</b>	TB/TG15/16+cable length (36" std.)			
<b>UNV</b>	universal					<b>CTS(#)</b>	screw slot+cable length (36" std.)			
						<b>SA(#)</b>	drywall+stem length <48 (18"std)			
						<b>CASL(#)</b>	drywall cable sloped ceiling			
						<b>SASL(#)</b>	drywall stem sloped ceiling			
						<a href="https://www.axislighting.com/download_file/9461/0">See Mounting kit guide for full specification code.</a> <a href="https://www.axislighting.com/download_file/9461/0">https://www.axislighting.com/download_file/9461/0</a> White canopy standard			Minimum 5ft; Not available with 347V Please consult factory	

# Beam 6

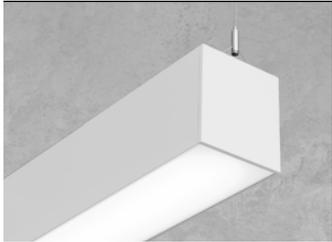

**Beam 6:** is a compact, linear system with multiple lighting, mounting and design options, suitable for large spaces and high ceilings. It delivers efficient direct light distributions.

**10 business days**

 [Click here for the spec sheet.](#)




## Ordering Guide

B6DILED		NOM. LUMENS/FT UP		NOM. LUMENS/FT DOWN		CRI		COLOR TEMP.		SHIELDING		LENGTH		FINISH	
PRODUCT ID		400	400 lm/ft - min	400	400 lm/ft - min	80	80 CRI	30	3000 K	SO	spotless lens	4	4'	W	white
B6DILED	Beam 6 Pendant Direct / Indirect LED	1200	1200 lm/ft - max	1200	1200 lm/ft - max			35	3500 K			5	5'	BLK	black*
								40	4000 K			6	6'	AP	aluminum paint*
												8	8'		
												12	12'		
												S(L)	system run		
		Outputs between listed min and max are available.				Applies to both UP & DOWN.				Available in 1' increments.				*Additional 5 business days required.	

VOLTAGE		DRIVER		CIRCUITS		MOUNTING/SUSPENSION				BATTERY (OPT.)	
120	120 V	DP	dimming (0-10V) 1%	1	1 circuit	CA(#)	drywall+cable length (36" std.)			B(#)	battery pack 4' sections
277	277 V			2	2 circuits	CT9(#)	TB/TG 9/16+cable length (36" std.)				
347	347 V			+E(#)	emergency circuit	CT15(#)	TB/TG15/16+cable length (36" std.)				
UNV	universal					CTS(#)	screw slot+cable length (36" std.)				
						SA(#)	drywall+stem length <48" (18" std.)				
						CASL(#)	drywall cable sloped ceiling				
						SASL(#)	drywall stem sloped ceiling				
						+SM	seismic kit				
				<a href="https://www.axislighting.com/download_file/9461/0">See Mounting kit guide for full specification code. https://www.axislighting.com/download_file/9461/0</a>						Not available with 347V. Please consult factory.	

# Beam 6

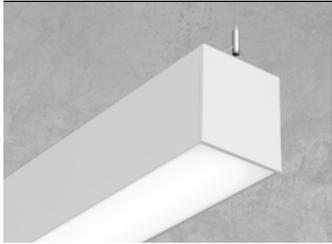

**Beam 6:** is a compact, linear system with multiple lighting, mounting, and design options, suitable for large spaces and high ceilings. It delivers efficient direct light distributions.

**10 business days**

 [Click here for the spec sheet.](#)




## Ordering Guide

B6DLED		NOM. LUMENS/FT		CRI		COLOR TEMP.		SHIELDING		LENGTH		FINISH	
B6DLED	PRODUCT ID	400	400 lm/ft - Minimum	80	80 CRI	30	3000 K	SO	spotless lens	4	4'	W	white
	Beam 6 Pendant Direct	1200	1200 lm/ft - Maximum			35	3500 K			5	5'	BLK	black*
						40	4000 K			6	6'	AP	aluminum paint*
										8	8'		
										12	12'		
										S#	system run		
Outputs between listed min and max are available.										Available in 1" increments.		*Additional 5 business days required.	

VOLTAGE		DRIVER		CIRCUITS		MOUNTING				BATTERY (OPTIONAL)	
120	120 V	DP	dimming (0-10V) 1%	1	1 circuit	CA(#)	drywall+cable length (36" std.)			B#	battery pack 4' sections
277	277 V			2	2 circuits	CT9(#)	TB/TG 9/16+cable length (36" std.)				
347	347 V			+E(#)	emergency circuit	CT15(#)	TB/TG15/16+cable length (36" std.)				
UNV	universal					CTS(#)	screw slot+cable length (36" std.)				
						SA(#)	drywall+stem length <48" (18" std.)				
						CASL(#)	drywall cable sloped ceiling				
						SASL(#)	drywall stem sloped ceiling				
						+SM	seismic kit				
						<a href="https://www.axislighting.com/download_file/9461/0">See Mounting kit guide for full specification code. https://www.axislighting.com/download_file/9461/0</a>				Not available with 347V Please consult factory.	

# Sculpt

## PENDANT MOUNT - DIRECT

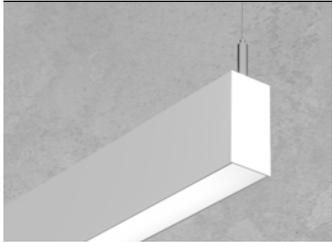

When all you need is a trace of light, **Sculpt** offers a 1.5 in. wide linear luminaire that departs from traditional linear footprints. **Sculpt** delivers the same quality of light and efficiency as larger profile products but in a clean, new, low profile look. Select from our range of lower lumen packages below to ensure balanced luminance and overall visual comfort.

**10 business days**

 [Click here for the spec sheet.](#)




## Ordering Guide

SCD		NOM. LUM/FT DOWN		CRI		COLOR TEMP.		SHIELDING		LINEAR LENGTH (FT)		FINISH	
SCD	Sculpt Pendant Direct	300	300 lm/ft - Min	80	80 CRI	30	3000 K	FL	flush	#	4 ft - 12 ft continuous length	W	white
		1000	1000 lm/ft - Max			35	3500 K	RG	0.5" regressed	S(L)	System Run	BLK	black*
						40	4000 K	ASO	asymmetric			AP	aluminum paint*
Outputs between listed min and max are available.								Lens options use spotless lens. Choose only one of the options above.		Sculpt accommodates any length.		*Additional 5 business days required.	

VOLTAGE		DRIVER		CIRCUITS		MOUNTING		BATTERY (OPTIONAL)		
120	120 V	DP	dimming (0-10V) 1%	1	1 circuit	CA(#)	drywall+cable length (36" std.)	B(#)	battery pack	
277	277 V			2	2 circuits	CT9(#)	TB/TG 9/16+cable length (36" std.)			
347	347 V			DP	dimming (0-10V) 1%	CT15(#)	TB/TG15/16+cable length (36" std.)			
UNV	universal			+E(#)	emergency circuit	CTS(#)	screw slot+cable length (36" std.)			
						CASL(#)	drywall cable sloped ceiling			
						+SM	seismic kit			
							<a href="#">See Mounting kit guide for full specification code.</a> <a href="https://www.axislighting.com/download_file/9461/0">https://www.axislighting.com/download_file/9461/0</a> Specify length.		Minimum 5ft; Not available with 347V Please consult factory.	

# Sculpt

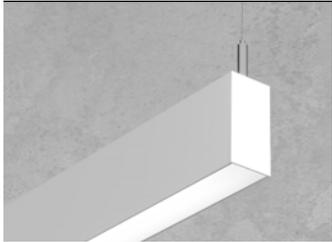

When all you need is a trace of light, **Sculpt** offers a 1.5 in. wide linear luminaire that departs from traditional linear footprints. **Sculpt** delivers the same quality of light and efficiency as larger profile products but in a clean, new, low profile look. Select from our range of lower lumen packages below to ensure balanced luminance and overall visual comfort.

10 business days

 [Click here for the spec sheet.](#)




## Ordering Guide

SCDI		NOMINAL LUMENS/FT UP		NOMINAL LUMENS/FT DOWN		CRI		COLOR TEMP.		SHIELDING INDIRECT		SHIELDING DIRECT		LINEAR LENGTH (FT)					
PRODUCT ID																			
SCDI	Sculpt Pendant Direct/Indirect	300	300 lm/ft - Minimum	300	300 lm/ft- Minimum	80	80 CRI	30	3000 K	SO	spotless lens	FL	flush*	#	4 ft - 12 ft continuous length				
		1000	1000 lm/ft - Maximum	500	750 lm/ft - Maximum			35	3500 K			BW	batwing			RG	0.5" regressed	S(L)	System Run
								40	4000 K							ASO	asymmetric		
		Outputs between listed min and max are available.										*Lens options use spotless lens		SCULPT accommodates any length.					

FINISH		VOLTAGE		DRIVER		CIRCUITS		MOUNTING/SUSPENSION				BATTERY (OPTIONAL)	
W	white	120	120 V	DP	dimming (0-10V) 1%	1	1 circuit	CA(#)	drywall+cable length (36" std.)			B(#)	battery pack
BLK	black*	277	277 V			2	2 circuits	CT9(#)	TB/TG 9/16+cable length (36" std.)				
AP	aluminium paint*	347	347 V			+E(#)	emergency circuit	CT15(#)	TB/TG 15/16+cable length (36" std.)				
		UNV	universal					CTS(#)	screw slot+cable length (36" std.)				
								CASL(#)	drywall cable sloped ceiling				
								+SM	seismic kit				
*Additional 5 business days required.								<a href="https://www.axislighting.com/download_file/9461/0">See Mounting kit guide for full specification code.</a> <a href="https://www.axislighting.com/download_file/9461/0">https://www.axislighting.com/download_file/9461/0</a> White canopy standard				5' minimum. For lengths under 5' battery pack is remote only. Not available with 347V. Please consult factory.	

# Sculpt

## PENDANT MOUNT - INDIRECT

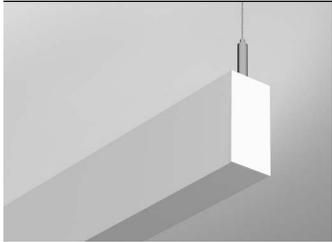

When all you need is a trace of light, **Sculpt** offers a 1.5 in. wide linear luminaire that departs from traditional linear footprints. **Sculpt** delivers the same quality of light and efficiency as larger profile products but in a clean, new, low profile look. Select from our range of lower lumen packages below to ensure balanced luminance and overall visual comfort.

**10 business days**

 [Click here for the spec sheet.](#)



## Ordering Guide

SCI		NOM. LUM/FT UP		CRI		COLOR TEMP.		SHIELDING		LINEAR LENGTH (FT)		FINISH	
SCI	Sculpt Pendant Indirect	300	300 lm/ft - Minimum	80	80 CRI	30	3000 K	SO	spotless lens	#	4 ft - 12 ft continuous length	W	white
		1000	1000 lm/ft - Maximum			35	3500 K	BW	batwing lens	S(L)	System Run	BLK	black*
						40	4000 K					AP	aluminum paint*
		Outputs between listed min and max are available.								SCULPT accommodates any length.		*Additional 5 business days required.	

VOLTAGE		DRIVER		CIRCUITS		MOUNTING				BATTERY (OPTIONAL)	
120	120 V	DP	dimming (0-10V) 1%	1	1 circuit	CA(#)	drywall+cable length (36" std.)			B(#)	battery pack 4' sections
277	277 V			2	2 circuits	CT9(#)	TB/TG 9/16+cable length (36" std.)				
347	347 V			+E(#)	emergency circuit	CT15(#)	TB/TG15/16+cable length (36" std.)				
UNV	universal					CTS(#)	screw slot+cable length (36" std.)				
						CASL(#)	drywall cable sloped ceiling				
						+SM	seismic kit				
						<a href="#">See Mounting kit guide for full specification code.</a> <a href="https://www.axislighting.com/download_file/9461/0">https://www.axislighting.com/download_file/9461/0</a> Specify length				Not available with 347V Please consult factory.	



## Linear Recessed & Recessed Vertical



# Linear Recessed & Recessed Vertical

Our QuickShip+ Linear Recessed Lighting Fixtures, designed to bring brilliance and efficiency to any space. These sleek and versatile fixtures combine seamless integration, rapid delivery, and exceptional performance for an effortless lighting solution.

# LINEAR RECESSED & RECESSED VERTICAL


BEAM 2 SQUARE



BEAM 3



BEAM 4

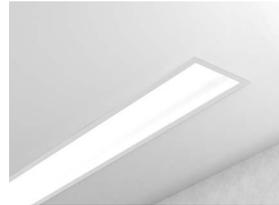

BEAM 6




SCULPT



## OPTIONS

Distribution	Direct	Direct	Direct	Direct	Direct
Lumens	300lm/ft - 1000lm/ft	300lm/ft - 1000lm/ft	400lm/ft - 1200lm/ft	400lm/ft - 1200lm/ft	300lm/ft min - 1000lm/ft max
CRI	80	80	80	80	80
CCT	3000K - 3500K - 4000K	3000K - 3500K - 4000K	3000K - 3500K - 4000K	3000K - 3500K - 4000K	3000K - 3500K - 4000K
Shielding Down <sup>(1)</sup>	Spotless Lens / Asymmetric / Batwing / Narrow / Graze / Wall Wash	Flush / Regressed / Asymmetric / Batwing / Narrow / Graze / Wall Wash	Flush / Regressed / Asymmetric / Batwing / Narrow / Graze / Wall Wash	Spotless Lens / Asymmetric	Flush / Asymmetric
Shielding Up	N/A	N/A	N/A	N/A	N/A
Length	4ft to 12ft - System run	4ft to 12ft - System run	4ft to 12ft - System run	4ft to 12ft - System run	4ft to 12ft - System run
Finish	White / Black <sup>(2)</sup> / Aluminum <sup>(2)</sup>	White / Black <sup>(2)</sup> / Aluminum <sup>(2)</sup>	White / Black <sup>(2)</sup> / Aluminum <sup>(2)</sup>	White / Black <sup>(2)</sup> / Aluminum <sup>(2)</sup>	White / Black <sup>(2)</sup> / Aluminum <sup>(2)</sup>
Voltage	120V / 277V / 347V / UNV	120V / 277V / 347V / UNV	120V / 277V / 347V / UNV	120V / 277V / 347V / UNV	120V / 277V / 347V / UNV
Driver	Dimming (0-10V) 1%	Dimming (0-10V) 1%	Dimming (0-10V) 1%	Dimming (0-10V) 1%	Dimming (0-10V) 1%
Circuits	1, 2	1, 2	1, 2	1, 2	1, 2
Mounting <sup>(3)</sup>	Drywall / T-bar / Tegular	Drywall / T-bar / Tegular	Drywall / T-bar / Tegular	Drywall / T-bar / Tegular	Drywall / T-bar / Tegular
<b>OPTIONAL</b>	(1) For vertical recessed only applies Spotless Lens. (2) Additional 5 business days required. (3) For vertical recessed only applies Drywall. (4) For vertical recessed only applies End feed / Flex whip.				
Battery	Battery pack	Battery pack	Battery pack	Battery pack	Battery pack
Others <sup>(4)</sup>	Flex whip / Chicago plenum	End feed / Flex whip / Chicago plenum	End feed / Flex whip / Chicago plenum	End feed / Flex whip / Chicago plenum	Flex whip / Chicago plenum

# Beam 2 Square

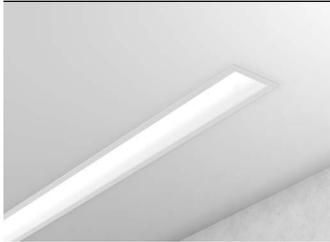

**Beam 2 Square:** is a highly esthetic, compact 2.5 in. square. Its powerful, glare-free illumination is well-suited to modern environments.

10 business days

 [Click here for the spec sheet.](#)




## Ordering Guide

B2SQRLLED		NOM. LUMENS/FT		CRI		COLOR TEMP.		SHIELDING		LENGTH		FINISH	
PRODUCT ID													
B2SQRLLED	Beam 2 Square Recessed LED	300	300 lm/ft - min	80	80 CRI	30	3000 K	SO	spotless lens	4	4'	W	white
		750	750 lm/ft - max for GZ, NW, WW, ASO*			35	3500 K	ASO	Asymmetric (flush only)	5	5'	BLK	black*
		1000	1000 lm/ft - max			40	4000 K	BW	Batwing (flush only)	6	6'	AP	aluminum paint*
								NW	Narrow (flush only)	8	8'		
								GZ	Graze (flush only)	12	12'		
								WW	Wallwash (flush only)	S(L)	system run		
		Outputs between listed min and max are available. * 750 lm/ft max. only for GZ, NW, WW and ASO.								Available in 1' increments.		*Additional 5 business days required.	

VOLTAGE		DRIVER		CIRCUITS		MOUNTING		BATTERY (OPT.)		OTHER	
120	120 V	DP	dimming (0-10V) 1%	1	1 circuit	TB9	t-bar 9/16"	B(#)	battery pack (integral)	FW(#)	flex whip (6' std)
277	277 V			2	2 circuits	TB15	t-bar 15/16"			CP	Chicago plenum
347	347 V			+E(#)	emergency circuit	ST	screw slot t-bar				
UNV	universal					TG9	tegular 9/16"				
						DF	drywall flange				
						D	drywall flangeless				
						DS	drywall spackle flange				
						DB	drywall slip-through bracket				
								Minimum 4ft; please consult factory Not available with 347V.			

# Beam 2 Square

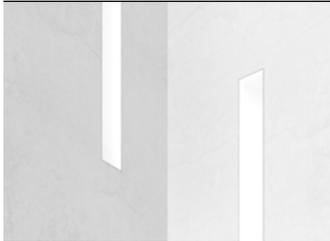

**Beam 2 Square:** is a highly esthetic, compact 2.5 in. square. Its powerful, glare-free illumination is well-suited to modern environments.

10 business days

 [Click here for the spec sheet.](#)



## Ordering Guide

B2SQRVLED		NOM. LUMENS/FT		CRI		COLOR TEMP.		SHIELDING		LENGTH (FT)		FINISH		VOLTAGE	
<b>B2SQRVLED</b>	Beam 2 Square Recessed Vertical LED	<b>300</b>	300 lm/ft - min	<b>80</b>	80 CRI	<b>27</b>	2700 K	<b>SO</b>	spotless lens	<b>4</b>	4'	<b>W</b>	white	<b>120</b>	120 V
		<b>1000</b>	1000 lm/ft - max			<b>30</b>	3000 K			<b>5</b>	5'	<b>BLK</b>	black*	<b>277</b>	277 V
						<b>35</b>	3500 K			<b>6</b>	6'	<b>AP</b>	aluminum paint*	<b>347</b>	347 V
						<b>40</b>	4000 K			<b>8</b>	8'			<b>UNV</b>	universal
										<b>12</b>	12'				
										<b>S(L)</b>	system run				
			Outputs between listed min and max are available.								Available in 1' increments.		*Additional 5 business days required.		

DRIVER		CIRCUITS		MOUNTING		BATTERY (OPTIONAL)		OTHER (OPTIONAL)	
<b>DP</b>	dimming (0-10V) 1%	<b>1</b>	1 circuit	<b>DF</b>	drywall flange	<b>B(#)</b>	battery pack (integral)	<b>EF</b>	end feed
		<b>2</b>	2 circuits	<b>DS</b>	drywall spackle flange			<b>FW(#)</b>	flex whip (6' std)
		<b>+E(#)</b>	emergency circuit	<b>D</b>	drywall flangeless				
							Not available with 347V Please consult factory.		

# Beam 3



**Beam 3:** for a clean, uniform, continuous end-to-end luminous effect from a best-selling recessed linear luminaire that naturally complements any architectural design with minimal intrusion. Great for shallow ceiling spaces and available with multiple lengths and lumen packages to provide the right amount of light for the allowed wattage.

10 business days

 [Click here for the spec sheet.](#)



## Ordering Guide

BMRLED		NOM. LUM/FT DOWN		CRI	COLOR TEMP.	SHIELDING	LENGTH (FT)	FINISH					
BMRLED	Recessed LED	300	300 lm/ft - min	80	80 CRI	30	3000 K	FL	flush*	4	4'	W	white
		1000	1000 lm/ft - max for GZ, NW, WW, ASO.*		35	3500 K	RG	regressed*	5	5'	BLK	black*	
		1100	1100 lm/ft - max		40	4000 K	ASO	asymmetric, flush only	6	6'	AP	aluminum paint*	
						BW	batwing, flush only	8	8'				
						NW	narrow, flush only	12	12'				
						GZ	graze, flush only	S(L)	System Run				
						WW	wallwash, flush only						
		Outputs between listed min and max are available. * 1000 lm/ft max. only for GZ, NW, WW and ASO.				*Lens options use spotless lens. Choose only one of the options above.			Available in 1' increments.	*Additional 5 business days required.			

VOLTAGE		DRIVER	CIRCUITS	MOUNTING	BATTERY (OPTIONAL)	OTHER (OPTIONAL)	
120	120 V	DP dimming (0-10V) 1%	1	1 circuit	B(##) battery pack 4' sections	EF	end feed
277	277 V		2	2 circuits		FW(##)	flex whip (6' std)
347	347 V		+E(##) emergency circuit	<b>TB9</b> t-bar 9/16" <b>TB15</b> t-bar 15/16" <b>ST</b> screw slot t-bar <b>TG9</b> tegular 9/16" <b>TG15</b> tegular 15/16" <b>DF</b> drywall flange <b>D</b> drywall flangeless <b>DB</b> slip-through bracket <b>DS</b> drywall spackle flange <b>TX</b> tx Hunter Douglas techstyle*		CP	Chicago plenum
UNV	universal					<b>HD</b> hold-down clip*	
				*TX available with flush lens only	Minimum 5ft; Not available with 347V Please consult factory.	*Only available for t-bar mounting	



# Beam 4



**Beam 4:** for a clean, uniform, continuous end-to-end luminous effect from a best-selling recessed linear luminaire that naturally complements any architectural design with minimal intrusion. Great for shallow ceiling spaces and available with multiple lengths and lumen packages to provide the right amount of light for the allowed wattage.

10 business days

 [Click here for the spec sheet.](#)



## Ordering Guide

BBRLED		NOM. LUM/FT DOWN		CRI		COLOR TEMP.		SHIELDING		LENGTH (FT)		FINISH	
BBRLED	Recessed LED	400	400 lm/ft - Minimum	80	80 CRI	30	3000 K	FL	flush*	4	4'	W	white
		1000	1000 lm/ft - max for GZ, NW, WW, ASO.*			35	3500 K	RG	regressed*	5	5'	BLK	black*
		1200	1200 lm/ft - Maximum			40	4000 K	ASO	asymmetric, flush only	6	6'	AP	aluminum paint*
								BW	batwing, flush only	8	8'		
								NW	narrow, flush only	12	12'		
								GZ	graze, flush only	S(L)	System Run		
								WW	wallwash, flush only				
Outputs between listed min and max are available. * 1000 lm/ft max. only for GZ, NW, WW and ASO.								*Lens options use spotless lens. Choose only one of the options above.		Available in 1' increments.		*Additional 5 business days required.	

VOLTAGE		DRIVER		CIRCUITS		MOUNTING				BATTERY (OPTIONAL)		OTHER (OPTIONAL)	
120	120 V	DP	dimming (0-10V) 1%	1	1 circuit	TB9	t-bar 9/16"	B(#)	battery pack 4' sections			EF	end feed
277	277 V			2	2 circuits	TB15	t-bar 15/16"					FW(#)	flex whip (6' std)
347	347 V			+E(#)	emergency circuit	ST	screw slot t-bar					CP	Chicago plenum
UNV	universal					TG9	tegular 9/16"					HD	hold-down clip*
						TG15	tegular 15/16"						
						DF	drywall flange						
						D	drywall flangeless						
						DB	slip-through bracket						
						DS	drywall spackle flange						
						TX	tx Hunter Douglas techstyle*						
						*TX available with flush lens only				Minimum 5ft; Not available with 347V Please consult factory.		*Only available for t-bar mounting	

# Beam 4



**Beam 4:** for a clean, uniform, continuous end-to-end luminous effect from a best-selling recessed linear luminaire that naturally complements any architectural design with minimal intrusion. Great for shallow ceiling spaces and available with multiple lengths and lumen packages to provide the right amount of light for the allowed wattage.

10 business days

 [Click here for the spec sheet.](#)




## Ordering Guide

BBRVLED		NOM. LUM/FT DOWN		CRI		COLOR TEMP.		SO		LENGTH (FT)		FINISH	
PRODUCT ID		400	400 lm/ft - Minimum	80	80 CRI	30	3000 K	SO	spotless lens	4	4'	W	white
BBRVLED	Recessed Vertical LED	1200	1200 lm/ft - Maximum			35	3500 K			6	6'	BLK	black*
						40	4000 K			8	8'	AP	aluminum paint*
										12	12'		
										S(L)	System Run		
		Outputs between listed min and max are available.								Available in 1' increments.		*Additional 5 business days required.	

VOLTAGE		DRIVER		CIRCUITS		MOUNTING		BATTERY (OPTIONAL)		OTHER (OPTIONAL)	
120	120 V	DP	dimming (0-10V) 1%	1	1 circuit	DF	drywall flange	B(#)	battery pack 4' sections	EF	end feed
277	277 V			2	2 circuits	DS	drywall spackle flange			FW(#)	flex whip (6' std)
347	347 V			+E(#)	emergency circuit	D	drywall flangeless				
UNV	universal										
									Minimum 5ft; Not available with 347V Please consult factory.		

# Beam 6

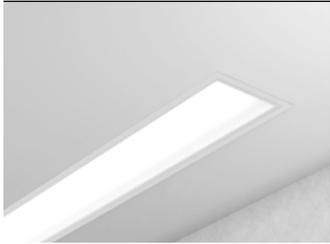

**Beam 6:** is a compact, linear system with multiple lighting, mounting and design options, suitable for large spaces and high ceilings. It delivers efficient direct light distributions.

10 business days

 [Click here for the spec sheet.](#)



## Ordering Guide

B6RLED		NOM. LUMENS/FT		CRI		COLOR TEMP.		SHIELDING		LENGTH		FINISH		VOLTAGE	
<b>B6RLED</b>	Beam 6 Recessed LED	<b>400</b>	400 lm/ft - Min	<b>80</b>	80 CRI	<b>30</b>	3000 K	<b>FL</b>	flush spotless lens	<b>4</b>	4'	<b>W</b>	white	<b>120</b>	120 V
		<b>1200</b>	1200 lm/ft - Max			<b>35</b>	3500 K	<b>ASO</b>	asymmetric with SO lens	<b>5</b>	5'	<b>BLK</b>	black*	<b>277</b>	277 V
						<b>40</b>	4000 K			<b>6</b>	6'	<b>AP</b>	aluminum paint*	<b>347</b>	347 V
										<b>8</b>	8'			<b>UNV</b>	universal
										<b>12</b>	12'				
										<b>S(L)</b>	system run				
		Outputs between listed min and max are available.								Available in 1' increments.		*Additional 5 business days required.			

DRIVER	CIRCUITS	MOUNTING	BATTERY (OPT.)	OTHER (OPT.)
<b>DP</b> dimming (0-10V) 1%	<b>1</b> 1 circuit <b>2</b> 2 circuits <b>+E(#)</b> emergency circuit	<b>TB9</b> t-bar 9/16" <b>TB15</b> t-bar 15/16" <b>ST</b> screw slot t-bar <b>TG9</b> tegular 9/16" <b>TG15</b> tegular 15/16" <b>DF</b> drywall flange <b>D</b> drywall flangeless <b>DB</b> slip-through bracket <b>DS</b> drywall spackle flange	<b>B(#)</b> battery pack 4' sections	<b>EF</b> end feed <b>FW(#)</b> flex whip (6' std)* <b>CP</b> Chicago plenum <b>HD</b> hold down clip**
			Not available with 347V. Please consult factory.	*Specify quantity ** Only available for t-bar mounting

# Beam 6



**Beam 6:** is a compact, linear system with multiple lighting, mounting and design options, suitable for large spaces and high ceilings. It delivers efficient direct light distributions.

10 business days

 [Click here for the spec sheet.](#)



## Ordering Guide

B6RVLED		NOM. LUMENS/FT		CRI		COLOR TEMP.		SHIELDING		LENGTH		FINISH					
PRODUCT ID		400	1200	80		30	35	40	SO	4	5	6	8	12	W	BLK	AP
B6RVLED	Beam 6 Recessed Vertical LED	400 lm/ft - Minimum	1200 lm/ft - Maximum	80	80 CRI	30	3500 K	40	spotless lens	4	5	6	8	12	W	BLK	AP
		Outputs between listed min and max are available.								Available in 1' increments.		*Additional 5 business days required.					

VOLTAGE		DRIVER		CIRCUITS		MOUNTING/SUSPENSION		BATTERY (OPTIONAL)		OTHER (OPTIONAL)	
120	120 V	DP	dimming (0-10V) 1%	1	1 circuit	DF	drywall flange	B(#)	battery pack 4' sections	EF	end feed
277	277 V			2	2 circuits	DS	drywall spackle flange			FW(#)	flex whip (6' std)
347	347 V			+E(#)	emergency circuit	D	drywall flangeless				
UNV	universal										
								Not available with 347V. Please consult factory.			

# Sculpt



When all you need is a trace of light, **Sculpt** offers a 1.5 in. wide linear luminaire that departs from traditional linear footprints. **Sculpt** delivers the same quality of light and efficiency as larger profile products but in a clean, new, low profile look. Select from our range of lower lumen packages below to ensure balanced luminance and overall visual comfort.

**10 business days**

 [Click here for the spec sheet.](#)



## Ordering Guide

SCR						
PRODUCT ID	NOM. LUM/FT DOWN	CRI	COLOR TEMP.	SHIELDING	LENGTH (FT)	FINISH
SCR Sculpt Recessed	<b>300</b> 300 lm/ft - Minimum	<b>80</b> 80 CRI	<b>30</b> 3000 K	<b>FL</b> flush	# 4 ft - 12 ft continuous length <b>S(L)</b> System Run	<b>W</b> white
	<b>1000</b> 1000 lm/ft - Maximum		<b>35</b> 3500 K	<b>ASO</b> asymmetric		<b>BLK</b> black*
			<b>40</b> 4000 K			<b>AP</b> aluminum paint*
Outputs between listed min and max are available.				Lens option use spotless lens.	SCULPT accommodates any length.	*Additional 5 business days required.

VOLTAGE	DRIVER	CIRCUITS	MOUNTING		BATTERY (OPT.)	OTHER (OPT.)
<b>120</b> 120 V	<b>DP</b> dimming (0-10V) 1%	<b>1</b> 1 circuit	<b>MFTB9</b> MiniFlange t-bar 9/16"	<b>ST</b> screw slot t-bar	<b>B(#)</b> battery pack 4' sections	<b>FW(#)</b> flex whip (6' std)
<b>277</b> 277 V		<b>2</b> 2 circuits	<b>MFTB15</b> MiniFlange t-bar 15/16"	<b>TG9</b> tegular 9/16"		<b>CP</b> Chicago plenum
<b>347</b> 347 V		<b>+E(#)</b> emergency circuit	<b>MFST</b> MiniFlange screw slot t-bar	<b>TG15</b> tegular 15/16"		
<b>UNV</b> universal			<b>MFTG9</b> MiniFlange 9/16" t-tegular	<b>DF</b> drywall flange		
			<b>MFTG15</b> MiniFlange 15/16" t-tegular	<b>D</b> drywall flangeless		
			<b>TB9</b> t-bar 9/16"	<b>DB</b> slip-through bracket		
			<b>TB15</b> t-bar 15/16"	<b>DS</b> drywall spackle flange		
					Not available with 347V Please consult factory.	

# Sculpt



When all you need is a trace of light, **Sculpt** offers a 1.5 in. wide linear luminaire that departs from traditional linear footprints. **Sculpt** delivers the same quality of light and efficiency as larger profile products but in a clean, new, low profile look. Select from our range of lower lumen packages below to ensure balanced luminance and overall visual comfort.

10 business days

 [Click here for the spec sheet.](#)



## Ordering Guide

SCRV						FL							
PRODUCT ID		NOM. LUM/FT DOWN		CRI		COLOR TEMP.		SHIELDING		LINEAR LENGTH (FT)		FINISH	
SCRV	Sculpt Recessed Vertical	300	300 lm/ft - Min	80	80 CRI	30	3000 K	FL	flush	#	4 ft - 12 ft continuous length	W	white
		1000	1000 lm/ft - Max			35	3500 K			S(L)	System Run	BLK	black*
						40	4000 K					AP	aluminum paint*
Outputs between listed min and max are available.								Lens options use spotless lens		SCULPT accommodates any length.		*Additional 5 business days required.	

VOLTAGE		DRIVER		CIRCUITS		MOUNTING / SUSPENSION		BATTERY (OPTIONAL)		OTHER (OPTIONAL)	
120	120 V	DP	dimming (0-10V) 1%	1	1 circuit	D	drywall flangeless	B(#)	battery pack 4' sections	FW(#)	flex whip (6' std)
277	277 V			2	2 circuits	DB	slip-through bracket				
347	347 V			+E(#)	emergency circuit	DS	drywall spackle flange				
UNV	universal								Not available with 347V Please consult factory.		



## Surface




## Surface

Reinvent ceiling esthetics with built-in flexibility. Create original illuminated ceiling designs, lines-of-light, patterns of light or a combination that cut through ceilings.

# SURFACE


BEAM 2

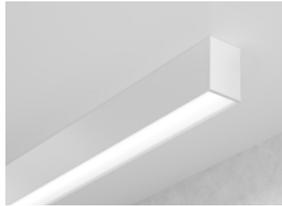


BEAM 2 SQUARE




BEAM 3

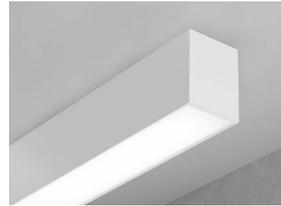


BEAM 4

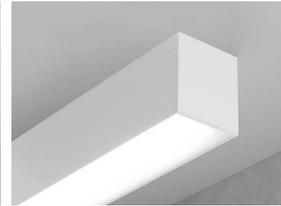

BEAM 6

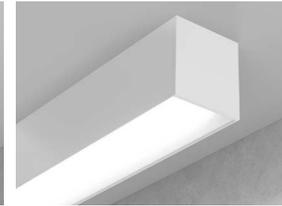

SCULPT

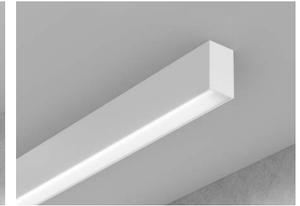

## OPTIONS


Distribution	Direct	Direct	Direct	Direct	Direct	Direct
Lumens	300lm/ft min - 1000lm/ft max	300lm/ft min - 1000lm/ft max	300lm/ft min - 1100lm/ft max	400lm/ft - 1200lm/ft	400lm/ft - 1200lm/ft	300lm/ft min - 1000lm/ft max
CRI	80	80	80	80	80	80
CCT	3000K - 3500K - 4000K	3000K - 3500K - 4000K	3000K - 3500K - 4000K			
Shielding Down	Spotless Lens / Asymmetric / Batwing / Narrow / Graze / Wall Wash	Spotless Lens / Asymmetric / Batwing / Narrow / Graze / Wall Wash	Spotless Lens / Asymmetric / Batwing / Narrow / Graze / Wall Wash	Spotless Lens / Asymmetric / Batwing / Narrow / Graze / Wall Wash	Spotless lens	Spotless lens / Asymmetric
Length	4ft to 12ft - System run	4ft to 12ft - System run	4ft to 12ft - System run			
Finish	White / Black <sup>(1)</sup> / Aluminum <sup>(1)</sup>	White / Black <sup>(1)</sup> / Aluminum <sup>(1)</sup>	White / Black <sup>(1)</sup> / Aluminum <sup>(1)</sup>			
Voltage	120V / 277V / 347V / UNV	120V / 277V / 347V / UNV	120V / 277V / 347V / UNV			
Driver	Dimming (0-10V) 1%	Dimming (0-10V) 1%	Dimming (0-10V) 1%	Dimming (0-10V) 1%	Dimming (0-10V) 1%	Dimming (0-10V) 1%
Circuits	1, 2	1, 2	1, 2	1, 2	1, 2	1, 2
Mounting	Drywall / T-bar / Tegular / Solid ceiling	Drywall / T-bar / Tegular / Solid ceiling	Drywall / T-bar / Tegular / Solid ceiling	Drywall / T-bar / Tegular / Solid ceiling	Drywall / T-bar / Tegular / Solid ceiling	Drywall / T-bar / Tegular / Solid ceiling

(1) Additional 5 business days required.

## OPTIONAL

Battery	Battery pack					
---------	--------------	--------------	--------------	--------------	--------------	--------------

# Beam 2

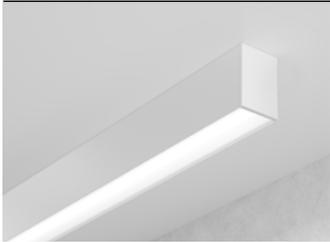

**Beam 2:** for a clean, uniform, continuous end-to-end luminous effect from a best-selling linear luminaire that naturally complements any architectural design with minimal intrusion. Available with multiple lengths and lumen packages to provide the right amount of light for the allowed wattage.

10 business days

 [Click here for the spec sheet.](#)




## Ordering Guide

TB2SLED		NOM. LUM/FT DOWN		CRI	COLOR TEMP.	SHIELDING	LENGTH (FT)	FINISH
TB2SLED	Beam 2 - Surface LED	300	300 lm/ft - min	80	80 CRI	SO	4	W white BLK black* AP aluminum paint*
		750	750 lm/ft - max for GZ, NW, WW, ASO.*			35	5	
		1000	1000 lm/ft - max			40	8	
						NW	12	
						WW	S(L)	
		Outputs between listed min and max are available. * 750 lm/ft max. only for GZ, NW and ASO.				Choose only one of the options above.		Available in 1' increments.
								*Additional 5 business days required.

VOLTAGE	DRIVER	CIRCUITS	MOUNTING	BATTERY (OPTIONAL)
120	DP dimming (0-10V) 1%	1	SB9	B(#) battery pack (integral)
277		2	SB15	
347		+E(#) emergency circuit	SBS	
UNV			S	
			SC	
				Minimum 5ft; Not available with 347V Please consult factory.

# Beam 2 Square

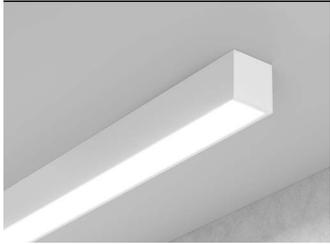

**Beam 2 Square:** is a highly esthetic, compact 2.5 in. square. Its powerful, glare-free illumination is well-suited to modern environments.

10 business days

 [Click here for the spec sheet.](#)




## Ordering Guide

B2SQSLED		NOM. LUMENS/FT		CRI		COLOR TEMP.		SHIELDING		LENGTH		FINISH	
PRODUCT ID													
B2SQSLED	Beam 2 Square Surface LED	300	300 lm/ft - min	80	80 CRI	30	3000 K	SO	spotless lens	4	4'	W	white
		750	750 lm/ft - max for GZ, NW, WW, ASO*			35	3500 K	ASO	asymmetric, flush only	5	5'	BLK	black*
		1000	1000 lm/ft - max			40	4000 K	BW	batwing, flush only	6	6'	AP	aluminum paint*
								NW	narrow, flush only	8	8'		
								GZ	graze, flush only	12	12'		
								WW	wallwash, flush only	S(L)	system run		
		Outputs between listed min and max are available. * 750 lm/ft max. only for GZ, NW, WW and ASO.								Available in 1" increments.		*Additional 5 business days required.	

VOLTAGE		DRIVER		CIRCUITS		MOUNTING/SUSPENSION		BATTERY (OPTIONAL)	
120	120 V	DP	dimming (0-10V) 1%	1	1 circuit	SB9	surface TB/TG 9/16	B(#)	battery pack (integral)
277	277 V			2	2 circuits	SB15	surface TB/TG 15/16		
347	347 V			+E(#)	emergency circuit	SBS	surface screw slot t-bar		
UNV	universal					S	surface drywall ceiling		
						SC	surface solid ceiling		
								Minimum 4ft; please consult factory Not available with 347V.	

# Beam 3

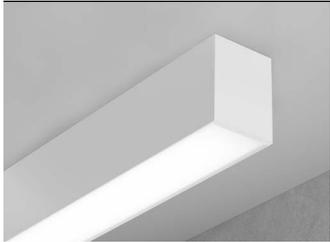

**Beam 3:** for a clean, uniform, continuous end-to-end luminous effect from a best-selling linear luminaire that naturally complements any architectural design with minimal intrusion. Available with multiple lengths and lumen packages to provide the right amount of light for the allowed wattage.

**10 business days**

 [Click here for the spec sheet.](#)




## Ordering Guide

TB3SLED		NOM. LUM/FT DOWN		CRI		COLOR TEMP.		SHIELDING		LENGTH (FT)		FINISH	
<b>TB3SLED</b>	BEAM3 - Surface LED	<b>300</b>	300 lm/ft - min	<b>80</b>	80 CRI	<b>30</b>	3000 K	<b>SO</b>	spotless lens	<b>4</b>	4'	<b>W</b>	white
		<b>1000</b>	1000 lm/ft - max for GZ, NW, WW, ASO.*			<b>35</b>	3500 K	<b>ASO</b>	Asymmetric	<b>5</b>	5'	<b>BLK</b>	black*
		<b>1100</b>	1100 lm/ft - max			<b>40</b>	4000 K	<b>BW</b>	Batwing	<b>6</b>	6'	<b>AP</b>	aluminum paint*
								<b>NW</b>	Narrow	<b>8</b>	8'		
								<b>GZ</b>	Graze	<b>12</b>	12'		
								<b>WW</b>	Wallwash	<b>S(L)</b>	System Run		
		Outputs between listed min and max are available. * 1000 lm/ft max. only for GZ, NW, WW and ASO.				Lens options use spotless lens. Choose only one of the options above.				Available in 1' increments.		*Additional 5 business days required.	

VOLTAGE		DRIVER		CIRCUITS		MOUNTING		BATTERY (OPTIONAL)	
<b>120</b>	120 V	<b>DP</b>	dimming (0-10V) 1%	<b>1</b>	1 circuit	<b>SB9</b>	surface TB/TG 9/16	<b>B(#)</b>	battery pack (integral)
<b>277</b>	277 V			<b>2</b>	2 circuits	<b>SB15</b>	surface TB/TG 15/16		
<b>347</b>	347 V			<b>+E(#)</b>	emergency circuit	<b>SBS</b>	surface screw slot t-bar		
<b>UNV</b>	universal					<b>S</b>	surface drywall ceiling		
								Minimum 5ft; Not available with 347V Please consult factory.	


# Beam 4

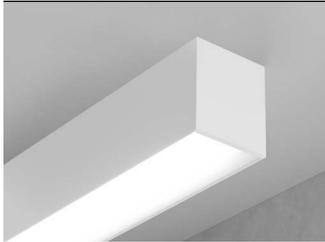

**Beam 4:** for a clean, uniform, continuous end-to-end luminous effect from a best-selling linear luminaire that naturally complements any architectural design with minimal intrusion. Available with multiple lengths and lumen packages to provide the right amount of light for the allowed wattage.

**10 business days**

 [Click here for the spec sheet.](#)




## Ordering Guide

TB4SLED		NOM. LUM/FT DOWN		CRI		COLOR TEMP.		SHIELDING		LENGTH (FT)		FINISH	
TB4SLED	BEAM 4 - Surface LED	400	400 lm/ft - Minimum	80	80 CRI	30	3000 K	SO	spotless lens	4	4'	W	white
		1000	1000 lm/ft - max for GZ, NW, WW, ASO.*			35	3500 K	ASO	Asymmetric	5	5'	BLK	black*
		1200	1200 lm/ft - Maximum			40	4000 K	BW	Batwing	6	6'	AP	aluminum paint*
								NW	Narrow	8	8'		
								GZ	Graze	12	12'		
								WW	Wallwash	S(L)	System Run		
		Outputs between listed min and max are available. *1000 lm/ft max. only for GZ, NW, WW and ASO.				Lens options use spotless lens. Choose only one of the options above.				Available in 1' increments.		*Additional 5 business days required.	

VOLTAGE		DRIVER		CIRCUITS		MOUNTING		BATTERY (OPTIONAL)	
120	120 V	DP	dimming (0-10V) 1%	1	1 circuit	SB9	surface TB/TG 9/16	B(#)	battery pack (integral)
277	277 V			2	2 circuits	SB15	surface TB/TG 15/16		
347	347 V			+E(#)	emergency circuit	SBS	surface screw slot t-bar		
UNV	universal					S	surface drywall ceiling		
						SC	surface solid ceiling		
								Minimum 5ft; Not available with 347V Please consult factory	

# Beam 6

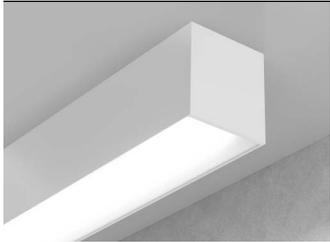

**Beam 6:** is a compact, linear system with multiple lighting, mounting and design options, suitable for large spaces and high ceilings. It delivers efficient direct light distributions.

10 business days

 [Click here for the spec sheet.](#)




## Ordering Guide

B6SLED		NOM. LUMENS/FT		CRI		COLOR TEMP.		SHIELDING		LENGTH		FINISH		VOLTAGE	
PRODUCT ID		400	400 lm/ft - Minimum	80	80 CRI	30	3000 K	SO	spotless lens	4	4'	W	white	120	120 V
B6SLED	Beam 6 Surface	1200	1200 lm/ft - Maximum			35	3500 K			5	5'	BLK	black*	277	277 V
						40	4000 K			6	6'	AP	aluminum paint*	347	347 V
										8	8'			UNV	universal
										12	12'				
										S(L)	system run				
			Outputs between listed min and max are available.						Available in 1' increments.			*Additional 5 business days required.			

DRIVER	CIRCUITS	MOUNTING/SUSPENSION	BATTERY (OPTIONAL)	OTHER (OPTIONAL)
DP dimming (0-10V) 1%	1 1 circuit 2 2 circuits +E(#) emergency circuit	SB9 surface TB/TG 9/16 SB15 surface TB/TG 15/16 SBS surface screw slot t-bar S surface drywall ceiling SC surface solid ceiling	B(#) battery pack 4' sections	EF end feed FW(#) flex whip (6' std)
			Not available with 347V. Please consult factory.	

# Sculpt

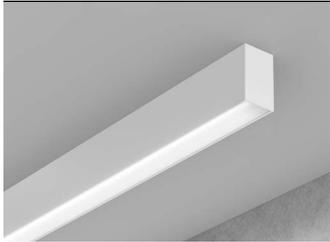

When all you need is a trace of light, **Sculpt** offers a 1.5" wide linear luminaire that departs from traditional linear footprints. Sculpt delivers the same quality of light and efficiency as larger profile products but in a clean, new, low profile look. Select from our range of lower lumen packages below to ensure balanced luminance and overall visual comfort.

**10 business days**

 [Click here for the spec sheet.](#)



## Ordering Guide

SCS							
PRODUCT ID	NOM. LUM/FT DOWN		CRI	COLOR TEMP.	SHIELDING	LINEAR LENGTH (FT)	FINISH
SCS Sculpt Surface	300	300 lm/ft - Min	80	30	FL flush*	# 4 ft - 12 ft continuous length	W white
	1000	1000 lm/ft - Max	80 CRI	35	RG 0.5" regressed	S(L) System Run	BLK black*
				40	ASO asymmetric		AP aluminum paint*
Outputs between listed min and max are available.					*Lens options use spotless lens	SCULPT accommodates any length.	*Additional 5 business days required.

VOLTAGE	DRIVER	CIRCUITS	MOUNTING	BATTERY (OPTIONAL)	
120 120 V	DP dimming (0-10V) 1%	1 1 circuit	SB9 surface TB/TG 9/16	B(#) battery pack 4' sections	
277 277 V		2 2 circuits	SB15 surface TB/TG 15/16		
347 347 V		+E(#) emergency circuit	SBS surface screw slot t-bar		
UNV universal			S surface drywall ceiling		
			SC surface solid ceiling		
				Not available with 347V Please consult factory.	



# Wall




## Wall


The choice of wall-mount luminaires delivering highly efficient asymmetric illumination. Offering lighting designers the option to complement pendant and surface layouts with style-matched wall luminaires.

# WALL


BEAM 2

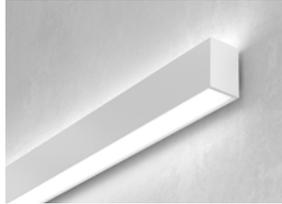


BEAM 2 SQUARE

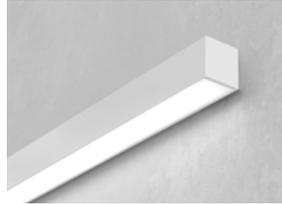


BEAM 3

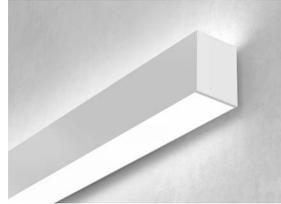


BEAM 4

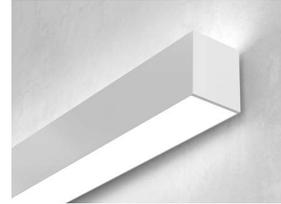

BEAM 6

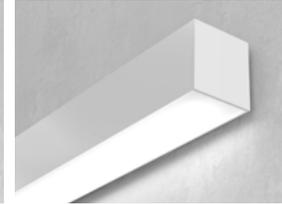

SCULPT

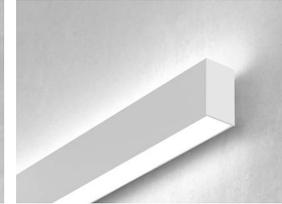

## OPTIONS


Distribution	Direct - Indirect - Direct / Indirect	Direct - Indirect	Direct - Indirect - Direct / Indirect	Direct - Indirect - Direct / Indirect	Direct	Direct - Indirect - Direct / Indirect
Lumens	300lm/ft min - 1000lm/ft max Down 300lm/ft min - 1100lm/ft max Up	300lm/ft min - 1000lm/ft max Down 300lm/ft min - 1100lm/ft max Up	300lm/ft min - 1000lm/ft max Down 300lm/ft min - 1100lm/ft max Up	400lm/ft - 1200lm/ft Down 400lm/ft - 1200lm/ft Up	400lm/ft - 1200lm/ft	300lm/ft min - 1000lm/ft max Down 300lm/ft min - 1000lm/ft max Up
CRI	80	80	80	80	80	80
CCT	3000K - 3500K - 4000K	3000K - 3500K - 4000K	3000K - 3500K - 4000K	3000K - 3500K - 4000K	3000K - 3500K - 4000K	3000K - 3500K - 4000K
Shielding Down	Spotless Lens / Asymmetric / Narrow / Graze	Spotless Lens / Asymmetric / Narrow / Graze	Spotless Lens / Asymmetric / Batwing / Narrow / Graze	Spotless Lens / Asymmetric / Narrow / Graze	Spotless lens	Flush / Regressed / Asymmetric
Shielding Up	Spotless Lens	N/A	Spotless Lens	Spotless Lens	N/A	Spotless Lens
Length	4ft to 12ft - System run	4ft to 12ft - System run	4ft to 12ft - System run	4ft to 12ft - System run	4ft to 12ft - System run	4ft to 12ft - System run
Finish	White / Black <sup>(1)</sup> / Aluminum <sup>(1)</sup>	White / Black <sup>(1)</sup> / Aluminum <sup>(1)</sup>	White / Black <sup>(1)</sup> / Aluminum <sup>(1)</sup>	White / Black <sup>(1)</sup> / Aluminum <sup>(1)</sup>	White / Black <sup>(1)</sup> / Aluminum <sup>(1)</sup>	White / Black <sup>(1)</sup> / Aluminum <sup>(1)</sup>
Voltage	120V / 277V / 347V / UNV	120V / 277V / 347V / UNV	120V / 277V / 347V / UNV	120V / 277V / 347V / UNV	120V / 277V / 347V / UNV	120V / 277V / 347V / UNV
Driver	Dimming (0-10V) 1%	Dimming (0-10V) 1%	Dimming (0-10V) 1%	Dimming (0-10V) 1%	Dimming (0-10V) 1%	Dimming (0-10V) 1%
Circuits	1, 2	1, 2	1, 2	1, 2	1, 2	1, 2
Mounting	Wall	Wall	Wall	Wall	Wall	Wall

(1) Additional 5 business days required.

## OPTIONAL

Battery	Battery pack					
---------	--------------	--------------	--------------	--------------	--------------	--------------

# Beam 2

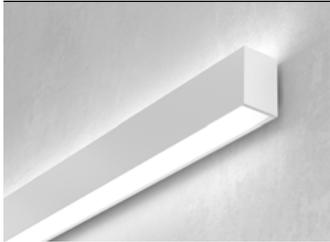

**Beam 2:** for a clean, uniform, continuous end-to-end luminous effect from a best-selling linear luminaire that naturally complements any architectural design with minimal intrusion. Available with multiple lengths and lumen packages to provide the right amount of light for the allowed wattage.

10 business days

 [Click here for the spec sheet.](#)




## Ordering Guide

TB2WDILED		NOM. LUM/FT UP		NOM. LUM/FT DOWN		CRI	COLOR TEMP.	SO	
PRODUCT ID								SHIELDING INDIRECT	SHIELDING DIRECT
TB2WDILED	Beam2 - Wall Direct/Indirect LED	300	300 lm/ft-Min	300	300 lm/ft - min	80	80 CRI	SO	spotless lens
		1100	1100 lm/ft-Max	750	750 lm/ft - max for GZ, NW, ASO*		30 3000 K 35 3500 K 40 4000 K		SO spotless lens ASO Asymmetric, flush only NW Narrow, flush only GZ Graze, flush only
		Outputs between listed min and max are available.		Outputs between listed min and max are available. * 750 lm/ft max. only for GZ, NW and ASO.				Choose only one of the options above.	

LENGTH (FT)	FINISH	VOLTAGE		DRIVER		CIRCUITS		BATTERY (OPT.)	
4 4'	W white	120	120 V	DP	dimming (0-10V) 1%	1	1 circuit	B(#)	battery pack (integral)
5 5'	BLK black*	277	277 V			2	2 circuits		
8 8'	AP aluminum paint*	347	347 V			+E(#)	emergency circuit		
12 12'		UNV	universal						
S(L) System Run *									
Available in 1' increments.	*Additional 5 business days required.								Minimum 5ft; Not available with 347V Please consult factory.

# Beam 2

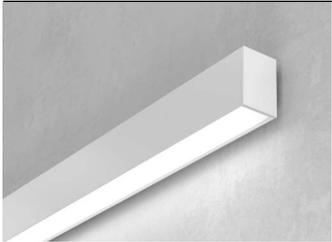

**Beam 2:** for a clean, uniform, continuous end-to-end luminous effect from a best-selling linear luminaire that naturally complements any architectural design with minimal intrusion. Available with multiple lengths and lumen packages to provide the right amount of light for the allowed wattage.

10 business days

 [Click here for the spec sheet.](#)




## Ordering Guide

TB2WDLED													
PRODUCT ID		NOM. LUM/FT DOWN		CRI		COLOR TEMP.		SHIELDING		LENGTH (FT)		FINISH	
TB2WDLED	Beam2 - Wall Direct LED	300	300 lm/ft - min	80	80 CRI	30	3000 K	SO	spotless lens	4	4'	W	white
		750	750 lm/ft - max for GZ, NW, ASO*			35	3500 K	ASO	Asymmetric , flush only	5	5'	BLK	black*
		1000	1000 lm/ft - max			40	4000 K	NW	Narrow , flush only	8	8'	AP	aluminum paint*
								GZ	Graze , flush only	12	12'		
		Outputs between listed min and max are available. * 750 lm/ft max. only for GZ, NW and ASO.						Choose only one of the options above.		Available in 1' increments.		*Additional 5 business days required.	
										S(L)		System Run	

VOLTAGE		DRIVER		CIRCUITS		BATTERY (OPT.)	
120	120 V	DP	dimming (0-10V) 1%	1	1 circuit	B(#)	battery pack (integral)
277	277 V			2	2 circuits		
347	347 V			+E(#)	emergency circuit		
UNV	universal					Minimum 5ft; please consult factory. Not available with 347V.	

# Beam 2

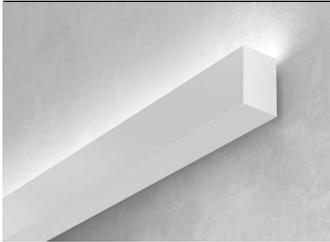

**Beam 2:** for a clean, uniform, continuous end-to-end luminous effect from a best-selling linear luminaire that naturally complements any architectural design with minimal intrusion. Available with multiple lengths and lumen packages to provide the right amount of light for the allowed wattage.

**10 business days**

 [Click here for the spec sheet.](#)




## Ordering Guide

TB2WILED															
PRODUCT ID		NOM. LUM/FT UP		CRI		COLOR TEMP.		SHIELDING INDIRECT		LENGTH (FT)		FINISH		VOLTAGE	
TB2WILED	Beam2 - Wall Indirect LED	300	300 lm/ft-Min	80	80 CRI	30	3000 K	SO	spotless lens	4	4'	W	white	120	120 V
		1100	1100 lm/ft-Max			35	3500 K			5	5'	BLK	black*	277	277 V
						40	4000 K			8	8'	AP	aluminum paint*	347	347 V
										12	12'			UNV	universal
		Outputs between listed min and max are available.								S(L) System Run Available in 1' increments.				*Additional 5 business days required.	

DRIVER	CIRCUITS	BATTERY (OPT.)
DP dimming (0-10V) 1%	1 1 circuit 2 2 circuits +E(#) emergency circuit	B(#) battery pack (integral)
		Requires 120V or 277V; Minimum 5ft; Not available with 347V Please consult factory.

# Beam 2 Square

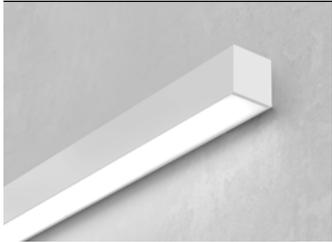

**Beam 2 Square:** is a highly esthetic, compact 2.5 in. square. Its powerful, glare-free illumination is well-suited to modern environments.

10 business days

 [Click here for the spec sheet.](#)




## Ordering Guide

B2SQWLED		NOM. LUMENS/FT		CRI		COLOR TEMP.		SHIELDING		LENGTH		FINISH	
<b>B2SQWLED</b>	Beam 2 Square - Wall Direct LED	<b>300</b>	300 lm/ft - min	<b>80</b>	80 CRI	<b>30</b>	3000 K	<b>SO</b>	spotless lens	<b>4</b>	4'	<b>W</b>	white
		<b>750</b>	750 lm/ft - max for GZ, NW, ASO*			<b>35</b>	3500 K	<b>ASO</b>	asymmetric, flush only	<b>5</b>	5'	<b>BLK</b>	black*
		<b>1000</b>	1000 lm/ft - max			<b>40</b>	4000 K	<b>NW</b>	narrow, flush only	<b>6</b>	6'	<b>AP</b>	aluminum paint*
								<b>GZ</b>	graze, flush only	<b>8</b>	8'		
										<b>S(L)</b>	system run		
		Outputs between listed min and max are available. * 750 lm/ft max. only for GZ, NW, and ASO.								Available in 1' increments.		*Additional 5 business days required.	

VOLTAGE		DRIVER		CIRCUITS		BATTERY (OPTIONAL)	
<b>120</b>	120 V	<b>DP</b>	dimming (0-10V) 1%	<b>1</b>	1 circuit	<b>B(#)</b>	battery pack (integral)
<b>277</b>	277 V			<b>2</b>	2 circuits		
<b>347</b>	347 V			<b>+E(#)</b>	emergency circuit		
<b>UNV</b>	universal					Minimum 4ft, please consult factory. Not available with 347V.	

# Beam 3

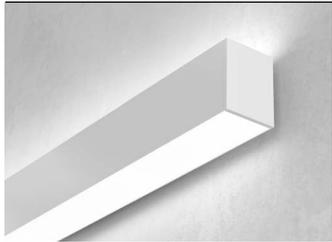

**Beam 3:** for a clean, uniform, continuous end-to-end luminous effect from a best-selling linear luminaire that naturally complements any architectural design with minimal intrusion. Available with multiple lengths and lumen packages to provide the right amount of light for the allowed wattage.

10 business days

 [Click here for the spec sheet.](#)




## Ordering Guide

TB3WDILED		NOM. LUM/FT UP		NOM. LUM/FT DOWN		CRI		COLOR TEMP.		SHIELDING INDIRECT		SHIELDING DIRECT	
<b>TB3WDILED</b>	BEAM3 - Wall Direct/Indirect LED	<b>300</b>	300 lm/ft-Min	<b>300</b>	300 lm/ft - min	<b>80</b>	80 CRI	<b>30</b>	3000 K	<b>SO</b>	spotless lens	<b>SO</b>	spotless lens
		<b>1200</b>	1200 lm/ft-Max	<b>1000</b>	1000 lm/ft - max for GZ, NW, ASO*			<b>35</b>	3500 K			<b>ASO</b>	Asymmetric
				<b>1100</b>	1100 lm/ft - max			<b>40</b>	4000 K			<b>NW</b>	Narrow
												<b>GZ</b>	Graze
		Outputs between listed min and max are available.				Outputs between listed min and max are available.							
						* 1000 lm/ft max. only for GZ, NW and ASO.							

LENGTH (FT)	FINISH	VOLTAGE		DRIVER	CIRCUITS	BATTERY (OPTIONAL)	
<b>4</b> 4'	<b>W</b> white	<b>120</b>	120 V	<b>DP</b> dimming (0-10V) 1%	<b>1</b> 1 circuit	<b>B(#)</b>	battery pack (integral)
<b>5</b> 5'	<b>BLK</b> black*	<b>277</b>	277 V		<b>2</b> 2 circuits		
<b>6</b> 6'	<b>AP</b> aluminum paint*	<b>347</b>	347 V		<b>+E(#)</b> emergency circuit		
<b>8</b> 8'		<b>UNV</b>	universal				
<b>12</b> 12'							
<b>S(L)</b> System Run							
Available in 1' increments.	*Additional 5 business days required.						Minimum 5ft; Not available with 347V Please consult factory.

# Beam 3

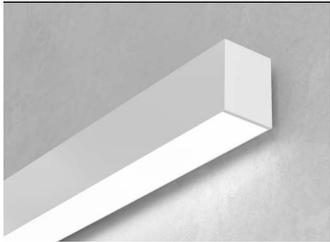

**Beam 3:** for a clean, uniform, continuous end-to-end luminous effect from a best-selling linear luminaire that naturally complements any architectural design with minimal intrusion. Available with multiple lengths and lumen packages to provide the right amount of light for the allowed wattage.

10 business days

 [Click here for the spec sheet.](#)




## Ordering Guide

TB3WDLED													
PRODUCT ID		NOM. LUM/FT DOWN		CRI		COLOR TEMP.		SHIELDING		LENGTH (FT)		FINISH	
TB3WDLED	Beam3 - Wall Direct LED	300	300 lm/ft - min	80	80 CRI	30	3000 K	SO	spotless lens	4	4'	W	white
		1000	1000 lm/ft - max for GZ, NW, ASO.*			35	3500 K	ASO	Asymmetric	5	5'	BLK	black*
		1100	1100 lm/ft - max			40	4000 K	NW	Narrow	8	8'	AP	aluminum paint*
		Outputs between listed min and max are available. * 1000 lm/ft max. only for GZ, NW and ASO.						Choose only one of the options above.		Available in 1' increments.		*Additional 5 business days required.	

VOLTAGE		DRIVER		CIRCUITS		BATTERY (OPT.)	
120	120 V	DP	dimming (0-10V) 1%	1	1 circuit	B(#)	battery pack (integral)
277	277 V			2	2 circuits		
347	347 V			+E(#)	emergency circuit		
UNV	universal						
						Requires 120V or 277V; Minimum 5ft; Not available with 347V. Please consult factory.	

# Beam 3

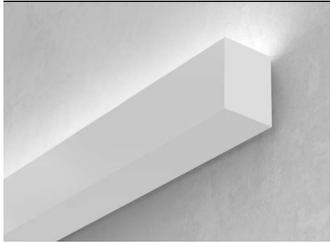

**Beam 3:** for a clean, uniform, continuous end-to-end luminous effect from a best-selling linear luminaire that naturally complements any architectural design with minimal intrusion. Available with multiple lengths and lumen packages to provide the right amount of light for the allowed wattage.

**10 business days**

 [Click here for the spec sheet.](#)




## Ordering Guide

TB3WILED		NOM. LUM/FT UP		CRI		COLOR TEMP.		SHIELDING INDIRECT		LENGTH (FT)		FINISH	
<b>PRODUCT ID</b>	Beam3 - Wall Indirect LED	<b>300</b>	300 lm/ft - Min.	<b>80</b>	80 CRI	<b>30</b>	3000 K	<b>SO</b>	spotless lens	<b>4</b>	4'	<b>W</b>	white
<b>TB3WILED</b>		<b>1200</b>	1200 lm/ft - Max.			<b>35</b>	3500 K			<b>5</b>	5'	<b>BLK</b>	black*
						<b>40</b>	4000 K			<b>8</b>	8'	<b>AP</b>	aluminum paint*
										<b>12</b>	12'		
										<b>S(L)</b>	System Run		
Outputs between listed min and max are available.										Available in 1' increments.		*Additional 5 business days required.	

VOLTAGE		DRIVER		CIRCUITS		BATTERY (OPT.)	
<b>120</b>	120 V	<b>DP</b>	dimming (0-10V) 1%	<b>1</b>	1 circuit	<b>B(#)</b>	battery pack (integral)
<b>277</b>	277 V			<b>2</b>	2 circuits		
<b>347</b>	347 V			<b>+E(#)</b>	emergency circuit		
<b>UNV</b>	universal						
							Requires 120V or 277V; Minimum 5ft; Not available with 347V Please consult factory.

# Beam 4

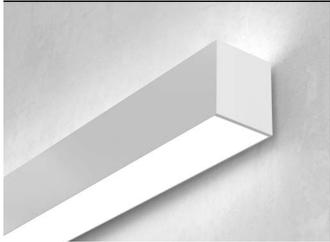

**Beam 4:** for a clean, uniform, continuous end-to-end luminous effect from a best-selling linear luminaire that naturally complements any architectural design with minimal intrusion. Available with multiple lengths and lumen packages to provide the right amount of light for the allowed wattage.

10 business days

 [Click here for the spec sheet.](#)




## Ordering Guide

TB4WDILED		NOM. LUM/FT UP		NOM. LUM/FT DOWN		CRI		COLOR TEMP.		SHIELDING INDIRECT		SHIELDING DIRECT	
<b>TB4WDILED</b>	<b>PRODUCT ID</b> BEAM4 - Wall Direct/Indirect LED	<b>400</b>	400 lm/ft - Min. 1200 1200 lm/ft - Max.	<b>400</b>	400 lm/ft - Min. 1000 1000 lm/ft - Max for GZ, NW, ASO.* 1200 1200 lm/ft - Max.	<b>80</b>	80 CRI	<b>30</b>	3000 K <b>35</b> 3500 K <b>40</b> 4000 K	<b>SO</b>	spotless lens	<b>SO</b>	spotless lens <b>ASO</b> Asymmetric <b>NW</b> Narrow <b>GZ</b> Graze
		Outputs between listed min and max are available.		Outputs between listed min and max are available. * 1000 lm/ft max. only for GZ, NW, and ASO.									

LENGTH (FT)	FINISH	VOLTAGE	DRIVER	CIRCUITS	BATTERY (OPTIONAL)
4 4'	<b>W</b> white	<b>120</b> 120 V	<b>DP</b> dimming (0-10V) 1%	<b>1</b> 1 circuit	<b>B(#)</b> battery pack (integral)
5 5'	<b>BLK</b> black*	<b>277</b> 277 V		<b>2</b> 2 circuits	
6 6'	<b>AP</b> aluminum paint*	<b>347</b> 347 V		<b>+E(#)</b> emergency circuit	
8 8'		<b>UNV</b> universal			
12 12'					
<b>S(L)</b> System Run Available in 1' increments.	*Additional 5 business days required.				Minimum 5ft; Not available with 347V Please consult factory.


# Beam 4

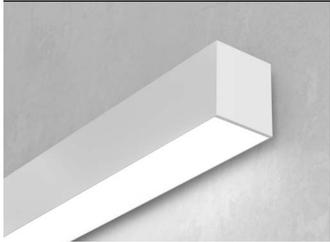

**Beam 4:** for a clean, uniform, continuous end-to-end luminous effect from a best-selling linear luminaire that naturally complements any architectural design with minimal intrusion. Available with multiple lengths and lumen packages to provide the right amount of light for the allowed wattage.

**10 business days**

 [Click here for the spec sheet.](#)




## Ordering Guide

TB4WDLED		NOM. LUM/FT DOWN		CRI		COLOR TEMP.		SHIELDING		LENGTH (FT)		FINISH	
TB4WDLED	Beam4 - Wall Direct LED	400	400 lm/ft - Minimum	80	80 CRI	30	3000 K	SO	spotless lens	4	4'	W	white
		1000	1000 lm/ft - max for GZ, NW, ASO.*			35	3500 K	ASO	Asymmetric	5	5'	BLK	black*
		1200	1200 lm/ft - Maximum			40	4000 K	NW	Narrow	8	8'	AP	aluminum paint*
		Outputs between listed min and max are available. * 1000 lm/ft max. only for GZ, NW and ASO.						Choose only one of the options above.		Available in 1' increments.		*Additional 5 business days required.	

VOLTAGE		DRIVER		CIRCUITS		BATTERY (OPT.)	
120	120 V	DP	dimming (0-10V) 1%	1	1 circuit	B(#)	battery pack (integral)
277	277 V			2	2 circuits		
347	347 V			+E(#)	emergency circuit		
UNV	universal					Minimum 5ft; Not available with 347V Please consult factory.	

# Beam 4

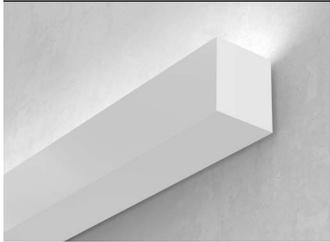

**Beam 4:** for a clean, uniform, continuous end-to-end luminous effect from a best-selling linear luminaire that naturally complements any architectural design with minimal intrusion. Available with multiple lengths and lumen packages to provide the right amount of light for the allowed wattage.

**10 business days**

 [Click here for the spec sheet.](#)




## Ordering Guide

TB4WILED		NOM. LUM/FT UP		CRI		COLOR TEMP.		SHIELDING INDIRECT		LENGTH (FT)		FINISH	
<b>TB4WILED</b>	Beam4 - Wall Indirect LED	<b>400</b>	400 lm/ft - Minimum	<b>80</b>	80 CRI	<b>30</b>	3000 K	<b>SO</b>	spotless lens	<b>4</b>	4'	<b>W</b>	white
		<b>1200</b>	1200 lm/ft - Maximum			<b>35</b>	3500 K			<b>5</b>	5'	<b>BLK</b>	black*
						<b>40</b>	4000 K			<b>8</b>	8'	<b>AP</b>	aluminum paint*
										<b>12</b>	12'		
										<b>S(L)</b>	System Run		
		Outputs between listed min and max are available.								Available in 1' increments.		*Additional 5 business days required.	

VOLTAGE		DRIVER		CIRCUITS		BATTERY (OPT.)	
<b>120</b>	120 V	<b>DP</b>	dimming (0-10V) 1%	<b>1</b>	1 circuit	<b>B(#)</b>	battery pack (integral)
<b>277</b>	277 V			<b>2</b>	2 circuits		
<b>347</b>	347 V			<b>+E(#)</b>	emergency circuit		
<b>UNV</b>	universal					Requires 120V or 277V; Minimum 5ft; Not available with 347V Please consult factory	

# Beam 6

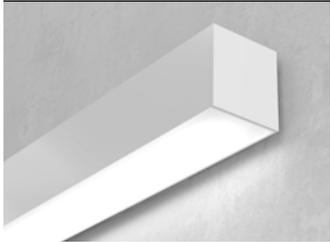

**Beam 6:** is a compact, linear system with multiple lighting, mounting and design options, suitable for large spaces and high ceilings. It delivers efficient direct light distributions.

10 business days

 [Click here for the spec sheet.](#)




## Ordering Guide

B6WDLED		NOM. LUMENS/FT		CRI		COLOR TEMP.		SHIELDING		LENGTH		FINISH	
<b>B6WDLED</b>	Beam 6 Wall Direct LED	<b>400</b>	400 lm/ft - Minimum	<b>80</b>	80 CRI	<b>30</b>	3000 K	<b>SO</b>	spotless lens	<b>4</b>	4'	<b>W</b>	white
		<b>1200</b>	1200 lm/ft - Maximum			<b>35</b>	3500 K			<b>5</b>	5'	<b>BLK</b>	black*
						<b>40</b>	4000 K			<b>6</b>	6'	<b>AP</b>	aluminum paint*
										<b>8</b>	8'		
										<b>12</b>	12'		
										<b>S(L)</b>	system run		
		Outputs between listed min and max are available.								Available in 1" increments.		*Additional 5 business days required.	

VOLTAGE		DRIVER		CIRCUITS		BATTERY (OPTIONAL)	
<b>120</b>	120 V	<b>DP</b>	dimming (0-10V) 1%	<b>1</b>	1 circuit	<b>B(#)</b>	battery pack 4' sections
<b>277</b>	277 V			<b>2</b>	2 circuits		
<b>347</b>	347 V			<b>+E(#)</b>	emergency circuit		
<b>UNV</b>	universal						
						Not available with 347V. Please consult factory.	

# Sculpt

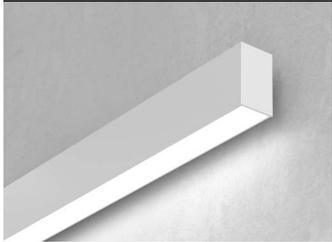

When all you need is a trace of light, **Sculpt** offers a 1.5 in. wide linear luminaire that departs from traditional linear footprints. **Sculpt** delivers the same quality of light and efficiency as larger profile products but in a clean, new, low profile look. Select from our range of lower lumen packages below to ensure balanced luminance and overall visual comfort.

10 business days

 [Click here for the spec sheet.](#)




## Ordering Guide

SCWD		NOM. LUM/FT DOWN		CRI		COLOR TEMP.		SHIELDING		LINEAR LENGTH (FT)		FINISH	
<b>SCWD</b>	Sculpt Wall Direct	<b>300</b>	300 lm/ft - Min	<b>80</b>	80 CRI	<b>30</b>	3000 K	<b>FL</b>	flush*	<b>#</b>	4 ft - 12 ft continuous length	<b>W</b>	white
		<b>1000</b>	1000 lm/ft - Max			<b>35</b>	3500 K	<b>RG</b>	0.5" regressed	<b>S(L)</b>	System Run	<b>BLK</b>	black*
						<b>40</b>	4000 K	<b>ASO</b>	asymmetric			<b>AP</b>	aluminum paint*
Outputs between listed min and max are available.								* Lens options use spotless lens		SCULPT accommodates any length. Metric lengths also available, please consult factory.		*Additional 5 business days required.	

VOLTAGE		DRIVER		CIRCUITS		BATTERY (OPT.)	
<b>120</b>	120 V	<b>DP</b>	dimming (0-10V) 1%	<b>1</b>	1 circuit	<b>B(#)</b>	battery pack 4' sections
<b>277</b>	277 V			<b>2</b>	2 circuits		
<b>347</b>	347 V			<b>+E(#)</b>	emergency circuit		
<b>UNV</b>	universal					Not available with 347V Please consult factory.	

# Sculpt

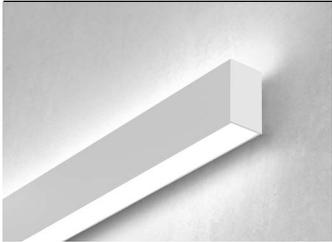

When all you need is a trace of light, **Sculpt** offers a 1.5 in. wide linear luminaire that departs from traditional linear footprints. **Sculpt** delivers the same quality of light and efficiency as larger profile products but in a clean, new, low profile look. Select from our range of lower lumen packages below to ensure balanced luminance and overall visual comfort.

10 business days

 [Click here for the spec sheet.](#)



\* Check the latest update on the DLC website for complete information. Not all versions may be DLC qualified.




## Ordering Guide

SCWDI		NOM. LUM/FT UP		NOM. LUM/FT DOWN		CRI		COLOR TEMP.		SHIELDING INDIRECT		SHIELDING DIRECT	
<b>SCWDI</b>	Sculpt Wall Direct/Indirect	<b>300</b>	300 lm/ft - Min	<b>300</b>	300 lm/ft - Min	<b>80</b>	80 CRI	<b>30</b>	3000 K	<b>SO</b>	spotless lens	<b>FL</b>	flush*
		<b>1000</b>	1000 lm/ft - Max	<b>500</b>	500 lm/ft - Max			<b>35</b>	3500 K			<b>RG</b>	0.5" regressed
								<b>40</b>	4000 K			<b>ASO</b>	asymmetric
Outputs between listed min and max are available.													

LINEAR LENGTH (FT)		FINISH		VOLTAGE		DRIVER		CIRCUITS		BATTERY (OPTIONAL)	
<b>#</b>	4 ft - 12 ft continuous length	<b>W</b>	white	<b>120</b>	120 V	<b>DP</b>	dimming (0-10V) 1%	<b>1</b>	1 circuit	<b>B(#)</b>	battery pack
<b>S(L)</b>	System Run	<b>BLK</b>	black*	<b>277</b>	277 V			<b>2</b>	2 circuits		
		<b>AP</b>	aluminum paint*	<b>347</b>	347 V			<b>+E(#)</b>	emergency circuit		
		<b>UNV</b>	universal								
SCULPT accommodates any length.		*Additional 5 business days required.								5' minimum. For lengths under 5' battery pack is remote only. Not available with 347V Please consult factory.	

# Sculpt

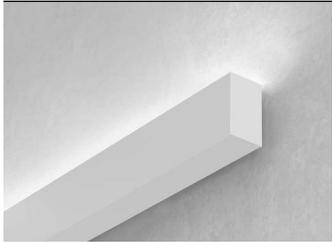

When all you need is a trace of light, **Sculpt** offers a 1.5 in. wide linear luminaire that departs from traditional linear footprints. **Sculpt** delivers the same quality of light and efficiency as larger profile products but in a clean, new, low profile look. Select from our range of lower lumen packages below to ensure balanced luminance and overall visual comfort.

**10 business days**

 [Click here for the spec sheet.](#)



## Ordering Guide

SCWI													
PRODUCT ID		NOM. LUM/FT UP		CRI		COLOR TEMP.		SHIELDING INDIRECT		LINEAR LENGTH (FT)		FINISH	
SCWI	Sculpt Wall Indirect	300	300 lm/ft - Minimum	80	80 CRI	30	3000 K	SO	spotless lens	#	4 ft - 12 ft continuous length	W	white
		1000	1000 lm/ft - Maximum			35	3500 K			S(L)	System Run	BLK	black*
						40	4000 K					AP	aluminum paint*
Outputs between listed min and max are available.								Blank extrusion on direct		SCULPT accommodates any length.		*Additional 5 business days required.	

VOLTAGE		DRIVER		CIRCUITS		BATTERY (OPT.)	
120	120 V	DP	dimming (0-10V) 1%	1	1 circuit	B(#)	battery pack
277	277 V			2	2 circuits		
347	347 V			+E(#)	emergency circuit		
UNV	universal						
4' minimum. For lengths under 4' battery pack is remote only. Not available with 347V Please consult factory.							



## Corners



## Corners

Designed to meet the most demanding lighting challenges enabling you to create cohesive designs that unite the space.




15  
business  
days

# How to Specify 90° Corners and Patterns


## Example

Defining R - Rectangular shape

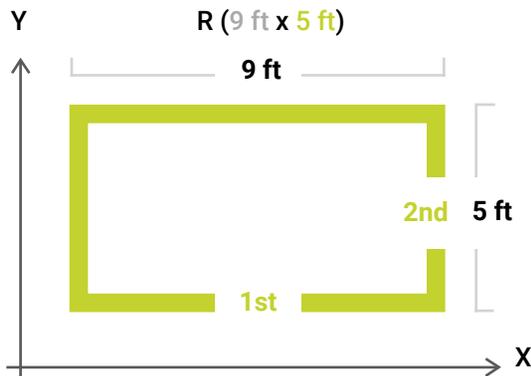


**Note:** The first number will always define the width, the second - the length.

Defining L shape

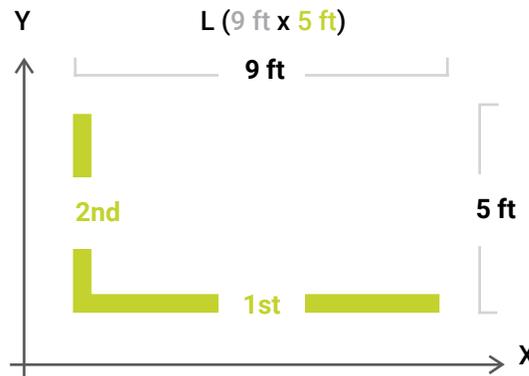


Defining S - Square shape

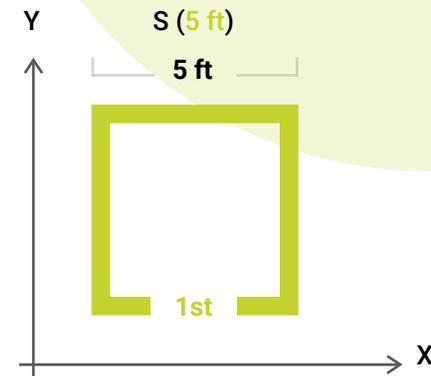

**Note:** The number will define the width. (All sides are the same length).


Defining U - shape

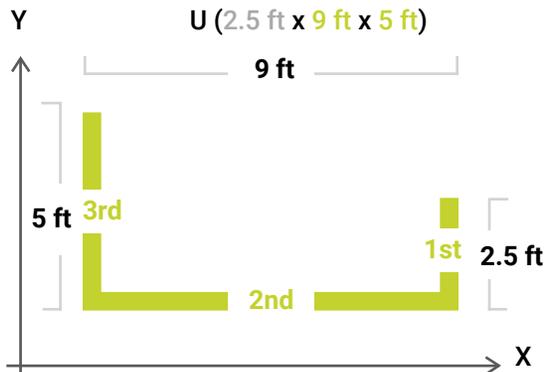


**Note:** The first number will always define the right arm length, the second - the width, and the third - the left arm length.

# Corners | LINEAR PENDANT - 90° Corners

BEAM 2

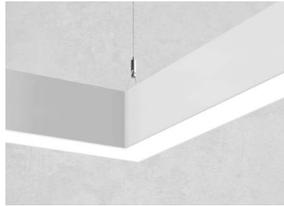


BEAM 2 SQUARE

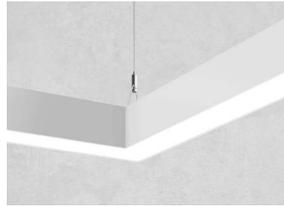

BEAM 3



BEAM 4

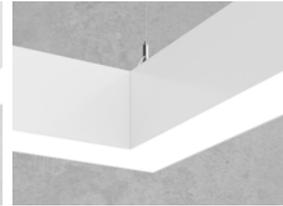

SCULPT



## OPTIONS



Corners	90° Corners	90° Corners	90° Corners	90° Corners	90° Corners
Patterns	Square, Rectangle, U and L shapes	Square, Rectangle, U and L shapes			
Distribution	Direct - Indirect - Direct / Indirect	Direct	Direct - Indirect - Direct / Indirect	Direct - Indirect - Direct / Indirect	Direct - Indirect - Direct / Indirect
Lumens	300lm/ft min - 1000lm/ft max Down 300lm/ft min - 1100lm/ft max Up	300lm/ft - 1000lm/ft Down	300lm/ft - 1100lm/ft Down 300lm/ft - 1200lm/ft Up	400lm/ft - 1200lm/ft Down 400lm/ft - 1200lm/ft Up	300lm/ft min - 500lm/ft max Down 300lm/ft min - 1000lm/ft max Up
CRI	80	80	80	80	80
CCT	3000K - 3500K - 4000K	3000K - 3500K - 4000K			
Shielding Down	Spotless Lens / Asymmetric / Batwing / Narrow / Graze / Wall Wash	Spotless Lens / Asymmetric / Batwing / Narrow / Graze / Wall Wash	Spotless Lens / Asymmetric / Batwing / Narrow / Graze / Wall Wash	Spotless Lens / Asymmetric / Batwing / Narrow / Graze / Wall Wash	Flush / Regressed / Asymmetric
Shielding Up	Spotless Lens / Batwing	N/A	Spotless Lens / Batwing	Spotless Lens / Batwing	Spotless Lens / Batwing
Finish	White / Black <sup>(1)</sup> / Aluminum <sup>(1)</sup>	White / Black <sup>(1)</sup> / Aluminum <sup>(1)</sup>			
Voltage	120V / 277V / 347V / UNV	120V / 277V / 347V / UNV			
Driver	Dimming (0-10V) 1%	Dimming (0-10V) 1%	Dimming (0-10V) 1%	Dimming (0-10V) 1%	Dimming (0-10V) 1%
Circuits	1, 2	1, 2	1, 2	1, 2	1, 2
Mounting	Drywall / T-bar / Tegular	Drywall / T-bar / Tegular			

(1) Additional 5 business days required.

## OPTIONAL

Battery	Battery pack				
---------	--------------	--------------	--------------	--------------	--------------

# Beam 2

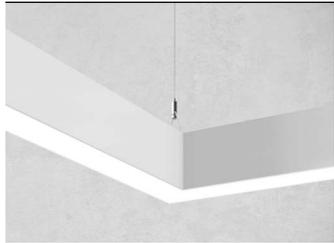

**IMPORTANT: All corner patterns must be submitted with drawings indicating dimensions and angles degree.**

**15 business days**

 [Click here for the spec sheet.](#)



## Ordering Guide

TB2DILEDPAT		PATTERNS AND LENGTH (SELECT ONE)		LUMENS/FT INDIRECT		LUMENS/FT DIRECT		CRI		COLOUR TEMP.		SHIELDING INDIRECT	
<b>TB2DILEDPAT</b>	Beam 2 Direct/Indirect	<b>S(L)*</b> square shape (length)	<b>300</b> 300 lm/ft-Min	<b>300</b> 300 lm/ft - Min	<b>80</b> 80 CRI	<b>35</b> 3500 K	<b>SO</b> spotless lens						
		<b>R(LxL)*</b> rectangular shape (length)	<b>1100</b> 1100 lm/ft-Max	<b>750</b> 750 lm/ft - max for GZ, NW, WW, ASO*		<b>30</b> 3000 K	<b>BW</b> batwing, flush only						
		<b>U(LxLxL)*</b> U shape (length)		<b>1000</b> 1000 lm/ft - max		<b>40</b> 4000 K							
		<b>L(LxL)*</b> L shape (length)											
*Comes in 90 degree only.			Outputs between listed min and max are available.		Outputs between listed min and max are available. * 750 lm/ft max. only for GZ, NW, WW and ASO.								

SHIELDING DIRECT		SPECIFY LENGTH		FINISH		VOLTAGE		DRIVER		CIRCUITS		MOUNTING/SUSPENSION		BATTERY (OPT.)	
<b>SO</b> spotless lens	<b>NL</b> nominal	<b>W</b> white	<b>120</b> 120V	<b>DP</b> dimming (0-10V) 1%	<b>1</b> 1 circuit	<b>CA(#)</b> drywall+cable length (36" std.)		<b>B(#)</b> battery pack							
<b>ASO</b> asymmetric, flush only	<b>EX</b> exact	<b>BLK</b> black*	<b>277</b> 277V		<b>2</b> 2 circuits	<b>CT9(#)</b> TB/TG 9/16+cable length (36" std.)		4' sections							
<b>BW</b> batwing, flush only		<b>AP</b> aluminum paint*	<b>347</b> 347V		<b>+E(#)</b> emergency circuit	<b>CT15(#)</b> TB/TG15/16+cable length (36" std.)									
<b>NW</b> narrow, flush only			<b>UNV</b> universal			<b>CTS(#)</b> screw slot+cable length (36" std.)									
<b>GZ</b> graze, flush only						<b>SA(#)</b> drywall+stem length <48" (18" std.)									
<b>WW</b> wallwash, flush only						<b>CASL(#)</b> drywall cable sloped ceiling									
						<b>SASL(#)</b> drywall stem sloped ceiling									
*Additional 5 business days required.						<a href="https://www.axislighting.com/download_file/9461/0">See Mounting kit guide for full specification code.</a> <a href="https://www.axislighting.com/download_file/9461/0">https://www.axislighting.com/download_file/9461/0</a> Specify quantity									

# Beam 2



**IMPORTANT:** All corner patterns must be submitted with drawings indicating dimensions and angles degree.

**15 business days**

 [Click here for the spec sheet.](#)





## Ordering Guide

TB2DLEDPAT		PATTERNS AND LENGTH (SELECT ONE)		LUMENS/FT DIRECT		CRI		COLOUR TEMP.		SHIELDING DIRECT		SPECIFY LENGTH	
<b>TB2DLEDPAT</b>	Beam 2 Direct	<b>S(L)*</b> square shape (length)	<b>300</b> 300 lm/ft - Min	<b>80</b>	80 CRI	<b>35</b>	3500 K	<b>SO</b>	spotless lens	<b>NL</b>	nominal		
		<b>R(LxL)*</b> rectangular shape (length)	<b>750</b> 750 lm/ft - max for			<b>30</b>	3000 K	<b>ASO</b>	asymmetric, flush only	<b>EX</b>	exact		
		<b>U(LxLxL)*</b> U shape (length)	GZ, NW, WW, ASO*			<b>40</b>	4000 K	<b>BW</b>	batwing, flush only				
		<b>L(LxL)*</b> L shape (length)	<b>1000</b> 1000 lm/ft - max					<b>NW</b>	narrow, flush only				
								<b>GZ</b>	graze, flush only				
								<b>WW</b>	wallwash, flush only				
		*Comes in 90 degree only.		Outputs between listed min and max are available. * 750 lm/ft max. only for GZ, NW, WW and ASO.									

FINISH		VOLTAGE		DRIVER		CIRCUITS		MOUNTING/SUSPENSION				BATTERY (OPT.)		
<b>W</b>	white	<b>120</b>	120V	<b>DP</b>	dimming (0-10V) 1%	<b>1</b>	1 circuit	<b>CA(#)</b>	drywall+cable length (36"std)				<b>B(#)</b>	battery pack
<b>BLK</b>	black*	<b>277</b>	277V			<b>2</b>	2 circuits	<b>CT9(#)</b>	TB/TG 9/16+cable length (36" std.)					4' sections
<b>AP</b>	aluminum paint*	<b>347</b>	347V			<b>+E(#)</b>	emergency circuit	<b>CT15(#)</b>	TB/TG15/16+cable length (36" std.)					
		<b>UNV</b>	universal					<b>CTS(#)</b>	screw slot+cable length (36" std.)					
								<b>SA(#)</b>	drywall+stem length <48 (18"std)					
								<b>CASL(#)</b>	drywallcable sloped ceiling					
								<b>SASL(#)</b>	drywall stem sloped ceiling					
*Additional 5 business days required.								<a href="https://www.axislighting.com/download_file/9461/0">See Mounting kit guide for full specification code. https://www.axislighting.com/download_file/9461/0</a>				Requires 120V or 277V Please consult factory.		

# Beam 2

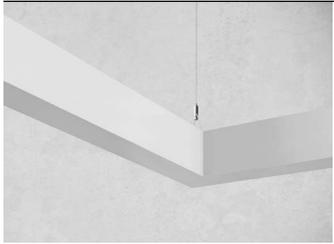

**IMPORTANT:** All corner patterns must be submitted with drawings indicating dimensions and angles degree.

15 business days

 Click here for the spec sheet.



## Ordering Guide

TB2ILEDPAT		PATTERNS AND LENGTH (SELECT ONE)		LUMENS/FT INDIRECT		CRI		COLOUR TEMP.		SHIELDING DIRECT		SPECIFY LENGTH	
<b>TB2ILEDPAT</b>	Beam 2 Indirect	<b>S(L)*</b> square shape (length)	<b>300</b> 300 lm/ft - Min	<b>80</b>	80 CRI	<b>35</b>	3500 K	<b>SO</b>	spotless lens	<b>NL</b>	nominal		
		<b>R(LxL)*</b> rectangular shape (length)	<b>1100</b> 1100 lm/ft - max			<b>30</b>	3000 K	<b>BW</b>	batwing, flush only	<b>EX</b>	exact		
		<b>U(LxLxL)*</b> U shape (length)				<b>40</b>	4000 K						
		<b>L(LxL)*</b> L shape (length)											
*Comes in 90 degree only.			Outputs between listed min and max are available.										

FINISH		VOLTAGE		DRIVER		CIRCUITS		MOUNTING/SUSPENSION				BATTERY (OPT.)		
<b>W</b>	white	<b>120</b>	120V	<b>DP</b>	dimming (0-10V) 1%	<b>1</b>	1 circuit	<b>CA(#)</b>	drywall+cable length (36"std)				<b>B(#)</b>	battery pack
<b>BLK</b>	black*	<b>277</b>	277V			<b>2</b>	2 circuits	<b>CT9(#)</b>	TB/TG 9/16+cable length (36" std.)					4' sections
<b>AP</b>	aluminum paint*	<b>347</b>	347V			<b>+E(#)</b>	emergency circuit	<b>CT15(#)</b>	TB/TG15/16+cable length (36" std.)					
		<b>UNV</b>	universal					<b>CTS(#)</b>	screw slot+cable length (36" std.)					
								<b>SA(#)</b>	drywall+stem length <48 (18"std)					
								<b>CASL(#)</b>	drywallcable sloped ceiling					
								<b>SASL(#)</b>	drywall stem sloped ceiling					
								<b>CASL(#)</b>	drywall cable sloped ceiling					
								<b>SASL(#)</b>	drywall stem sloped ceiling					
*Additional 5 business days required.								<a href="https://www.axislighting.com/download_file/9461/0">See Mounting kit guide for full specification code.</a> <a href="https://www.axislighting.com/download_file/9461/0">https://www.axislighting.com/download_file/9461/0</a> Specify quantity				Requires 120V or 277V Please consult factory.		

# Beam 2 Square



**IMPORTANT: All corner patterns must be submitted with drawings indicating dimensions and angles degree.**

15 business days

 [Click here for the spec sheet.](#)



## Ordering Guide

B2SQDLEDPAT		PATTERNS AND LENGTH (SELECT ONE)		LUMENS/FT DIRECT		CRI		COLOUR TEMP.		SHIELDING DIRECT		SPECIFY LENGTH	
<b>B2SQDLEDPAT</b>	Beam 2 Square Direct	<b>S(L)*</b> square shape (length)	<b>300</b> 300 lm/ft - Min	<b>80</b> 80 CRI	<b>30</b> 3000 K	<b>SO</b> spotless lens	<b>NL</b> nominal	<b>35</b> 3500 K	<b>ASO</b> asymmetric, flush only	<b>BW</b> batwing, flush only	<b>NW</b> narrow, flush only	<b>GZ</b> graze, flush only	<b>WW</b> wallwash, flush only
		<b>R(LxL)*</b> rectangular shape (length)	<b>750</b> 750 lm/ft - max for GZ, NW, WW, ASO*										
		<b>U(LxLxL)*</b> U shape (length)	<b>1000</b> 1000 lm/ft - max										
		<b>L(LxL)*</b> L shape (length)											
		*Comes in 90 degree only.		Outputs between listed min and max are available. * 750 lm/ft max. only for GZ, NW, WW and ASO.									

FINISH		VOLTAGE		DRIVER		CIRCUITS		MOUNTING/SUSPENSION				BATTERY (OPT.)	
<b>W</b>	white	<b>120</b>	120V	<b>DP</b>	dimming (0-10V) 1%	<b>1</b>	1 circuit	<b>CA(#)</b>	drywall+cable length (36" std)			<b>B(#)</b>	battery pack 4' sections
<b>BLK</b>	black*	<b>277</b>	277V			<b>2</b>	2 circuits	<b>CT9(#)</b>	TB/TG 9/16+cable length (36" std.)				
<b>AP</b>	aluminum paint*	<b>347</b>	347V			<b>+E(#)</b>	emergency circuit	<b>CT15(#)</b>	TB/TG15/16+cable length (36" std.)				
		<b>UNV</b>	universal					<b>CTS(#)</b>	screw slot+cable length (36" std.)				
								<b>SA(#)</b>	drywall+stem length <48 (18" std)				
								<b>CASL(#)</b>	drywall cable sloped ceiling				
								<b>SASL(#)</b>	drywall stem sloped ceiling				
* Additional 5 business days required.								See <a href="https://www.axislighting.com/download_file/9461/0">Mounting kit guide for full specification code.</a> <a href="https://www.axislighting.com/download_file/9461/0">https://www.axislighting.com/download_file/9461/0</a>				Requires 120V or 277V Please consult factory.	

# Beam 3



**IMPORTANT: All corner patterns must be submitted with drawings indicating dimensions and angles degree.**

15 business days

 [Click here for the spec sheet.](#)



## Ordering Guide

TB3DILEDPAT		PATTERNS AND LENGTH (SELECT ONE)		LUMENS/FT INDIRECT		LUMENS/FT DIRECT		CRI		COLOUR TEMP.		SHIELDING INDIRECT	
<b>TB3DILEDPAT</b>	Beam 3 Direct/Indirect	<b>S(L)</b> square shape (length)	<b>300</b> 300 lm/ft - min	<b>300</b> 300 lm/ft - min	<b>80</b> 80 CRI	<b>35</b> 3500 K	<b>SO</b> spotless lens						
		<b>R(LxL)</b> rectangular shape (length)	<b>1200</b> 1200 lm/ft - max	<b>1000</b> 1000 lm/ft - max for GZ, NW, WW, ASO.*		<b>30</b> 3000 K	<b>BW</b> batwing						
		<b>U(LxLxL)</b> U shape (length)		<b>1100</b> 1100 lm/ft - max		<b>40</b> 4000 K							
		<b>L(LxL)</b> L shape (length)		Outputs between listed min and max are available.		Outputs between listed min and max are available. * 1000 lm/ft max. only for GZ, NW, WW and ASO.							
		Comes in 90 degree only.											

SHIELDING DIRECT		SPECIFY LENGTH		FINISH		VOLTAGE		DRIVER		CIRCUITS		MOUNTING/SUSPENSION		BATTERY (OPT.)	
<b>SO</b> spotless lens	<b>NL</b> nominal	<b>W</b> white	<b>120</b> 120V	<b>DP</b> dimming (0-10V) 1%		<b>1</b> 1 circuit	<b>CA(#)</b> drywall+cable length (36" std.)		<b>B(#)</b> battery pack 4' sections						
<b>ASO</b> asymmetric	<b>EX</b> exact	<b>BLK</b> black*	<b>277</b> 277V			<b>2</b> 2 circuits	<b>CT9(#)</b> TB/TG 9/16+cable length (36" std.)								
<b>BW</b> batwing		<b>AP</b> aluminum paint*	<b>347</b> 347V			<b>+E(#)</b> emergency circuit	<b>CT15(#)</b> TB/TG15/16+cable length (36" std.)								
<b>NW</b> narrow			<b>UNV</b> universal				<b>CTS(#)</b> screw slot+cable length (36" std.)								
<b>GZ</b> graze							<b>SA(#)</b> drywall+stem length <48" (18" std.)								
<b>WW</b> wallwash							<b>CASL(#)</b> drywall cable sloped ceiling								
							<b>SASL(#)</b> drywall stem sloped ceiling								
		*Additional 5 business days required.						<a href="https://www.axislighting.com/download_file/9461/0">See Mounting kit guide for full specification code.</a> <a href="https://www.axislighting.com/download_file/9461/0">https://www.axislighting.com/download_file/9461/0</a> Specify quantity		Requires 120V or 277V Please consult factory.					

# Beam 3



**IMPORTANT:** All corner patterns must be submitted with drawings indicating dimensions and angles degree.

**15 business days**

 [Click here for the spec sheet.](#)





## Ordering Guide

TB3DLEDPAT		PATTERNS AND LENGTH (SELECT ONE)		LUMENS/FT DIRECT		CRI		COLOUR TEMP.		SHIELDING DIRECT		SPECIFY LENGTH	
<b>TB3DLEDPAT</b>	Beam 3 Direct	<b>S(L)</b>	square shape (length)	<b>300</b>	300 lm/ft - min	<b>80</b>	80 CRI	<b>35</b>	3500 K	<b>SO</b>	spotless lens	<b>NL</b>	nominal
		<b>R(LxL)</b>	rectangular shape (length)	<b>1000</b>	1000 lm/ft - max for GZ, NW, WW, ASO.*			<b>30</b>	3000 K	<b>ASO</b>	asymmetric	<b>EX</b>	exact
		<b>U(LxLxL)</b>	U shape (length)					<b>40</b>	4000 K	<b>BW</b>	batwing		
		<b>L(LxL)</b>	L shape (length)	<b>1100</b>	1100 lm/ft - max					<b>NW</b>	narrow		
										<b>GZ</b>	graze		
										<b>WW</b>	wallwash		
Comes in 90 degree only.				Outputs between listed min and max are available. * 1000 lm/ft max. only for GZ, NW, WW and ASO.									

FINISH		VOLTAGE		DRIVER		CIRCUITS		MOUNTING/SUSPENSION				BATTERY (OPT.)		
<b>W</b>	white	<b>120</b>	120V	<b>DP</b>	dimming (0-10V) 1%	<b>1</b>	1 circuit	<b>CA(#)</b>	drywall+cable length (36" std.)				<b>B(#)</b>	battery pack
<b>BLK</b>	black*	<b>277</b>	277V			<b>2</b>	2 circuits	<b>CT9(#)</b>	TB/TG 9/16+cable length (36" std.)					4' sections
<b>AP</b>	aluminum paint*	<b>347</b>	347V			<b>+E(#)</b>	emergency circuit	<b>CT15(#)</b>	TB/TG15/16+cable length (36" std.)					
		<b>UNV</b>	universal					<b>CTS(#)</b>	screw slot+cable length (36" std.)					
								<b>SA(#)</b>	drywall+stem length <48 (18" std)					
								<b>CASL(#)</b>	drywall cable sloped ceiling					
								<b>SASL(#)</b>	drywall stem sloped ceiling					
*Additional 5 business days required.								See Mounting kit guide for full specification code. <a href="https://www.axislighting.com/download_file/9461/0">https://www.axislighting.com/download_file/9461/0</a>				Requires 120V or 277V Please consult factory.		

# Beam 3

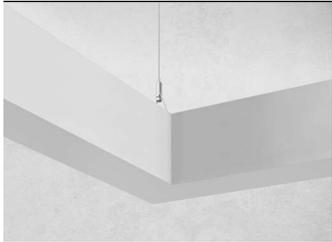

**IMPORTANT: All corner patterns must be submitted with drawings indicating dimensions and angles degree.**

15 business days

 Click here for the spec sheet.



## Ordering Guide

TB3ILEDPAT		PATTERNS AND LENGTH (SELECT ONE)		LUMENS/FT INDIRECT		CRI		COLOUR TEMP.		SHIELDING INDIRECT		SPECIFY LENGTH	
<b>TB3ILEDPAT</b>	Beam 3 Indirect	<b>S(L)</b> square shape (length)	<b>300</b> 300 lm/ft - min	<b>80</b>	80 CRI	<b>30</b>	3000 K	<b>SO</b>	spotless lens	<b>NL</b>	nominal		
		<b>R(LxL)</b> rectangular shape (length)	<b>1200</b> 1200 lm/ft - max			<b>35</b>	3500 K	<b>BW</b>	batwing	<b>EX</b>	exact		
		<b>U(LxLxL)</b> U shape (length)				<b>40</b>	4000 K						
		<b>L(LxL)</b> L shape (length)											
Comes in 90 degree only.				Outputs between listed min and max are available.									

FINISH		VOLTAGE		DRIVER		CIRCUITS		MOUNTING/SUSPENSION				BATTERY (OPT.)	
<b>W</b>	white	<b>120</b>	120V	<b>DP</b>	dimming (0-10V) 1%	<b>1</b>	1 circuit	<b>CA(#)</b>	drywall+cable length (36"std)			<b>B(#)</b>	battery pack
<b>BLK</b>	black*	<b>277</b>	277V			<b>2</b>	2 circuits	<b>CT9(#)</b>	TB/TG 9/16+cable length (36" std.)			4' sections	
<b>AP</b>	aluminum paint*	<b>347</b>	347V			<b>+E(#)</b>	emergency circuit	<b>CT15(#)</b>	TB/TG15/16+cable length (36" std.)				
		<b>UNV</b>	universal					<b>CTS(#)</b>	screw slot+cable length (36" std.)				
								<b>SA(#)</b>	drywall+stem length <48 (18"std)				
								<b>CASL(#)</b>	drywall cable sloped ceiling				
								<b>SASL(#)</b>	drywall stem sloped ceiling				
*Additional 5 business days required.								<a href="https://www.axislighting.com/download_file/9461/0">See Mounting kit guide for full specification code.</a> <a href="https://www.axislighting.com/download_file/9461/0">https://www.axislighting.com/download_file/9461/0</a> Specify quantity				Requires 120V or 277V Please consult factory.	

# Beam 4



**IMPORTANT:** All corner patterns must be submitted with drawings indicating dimensions and angles degree.

15 business days

 [Click here for the spec sheet.](#)




## Ordering Guide

TB4DILEDPAT		PATTERNS AND LENGTH (SELECT ONE)		LUMENS/FT INDIRECT		LUMENS/FT DIRECT		CRI		COLOUR TEMP.		SHIELDING INDIRECT	
<b>TB4DILEDPAT</b>	Beam 4 Direct/Indirect	<b>S(L)</b> square shape (length)	<b>400</b> 400 lm/ft - Min.	<b>400</b> 400 lm/ft - Min.	<b>80</b> 80 CRI	<b>35</b> 3500 K	<b>SO</b> spotless lens						
		<b>R(LxL)</b> rectangular shape (length)	<b>1200</b> 1200 lm/ft - Max.	<b>1000</b> 1000 lm/ft - Max for GZ, NW, WW, ASO.*		<b>30</b> 3000 K	<b>BW</b> batwing						
		<b>U(LxLxL)</b> U shape (length)		<b>1200</b> 1200 lm/ft - Max.		<b>40</b> 4000 K							
		<b>L(LxL)</b> L shape (length)											
		Comes in 90 degree only.		Outputs between listed min and max are available.		Outputs between listed min and max are available. * 1000 lm/ft max. only for GZ, NW, WW and ASO.							

SHIELDING DIRECT		SPECIFY LENGTH		FINISH		VOLTAGE		DRIVER		CIRCUITS		MOUNTING/SUSPENSION		BATTERY (OPT.)	
<b>SO</b> spotless lens	<b>NL</b> nominal	<b>W</b> white	<b>120</b> 120V	<b>DP</b> dimming (0-10V) 1%	<b>1</b> 1 circuit	<b>CA(#)</b> drywall+cable length (36" std.)	<b>B(#)</b> battery pack (integral)								
<b>ASO</b> asymmetric	<b>EX</b> exact	<b>BLK</b> black*	<b>277</b> 277V		<b>2</b> 2 circuits	<b>CT9(#)</b> TB/TG 9/16+cable length (36" std.)									
<b>BW</b> batwing		<b>AP</b> aluminum paint*	<b>347</b> 347V		<b>+E(#)</b> emergency circuit	<b>CT15(#)</b> TB/TG15/16+cable length (36" std.)									
<b>NW</b> narrow			<b>UNV</b> universal			<b>CTS(#)</b> screw slot+cable length (36" std.)									
<b>GZ</b> graze						<b>SA(#)</b> drywall+stem length <48" (18" std.)									
<b>WW</b> wallwash						<b>CASL(#)</b> drywall cable sloped ceiling									
						<b>SASL(#)</b> drywall stem sloped ceiling									
				*Additional 5 business days required.								<a href="https://www.axislighting.com/download_file/9461/0">See Mounting kit guide for full specification code.</a> <a href="https://www.axislighting.com/download_file/9461/0">https://www.axislighting.com/download_file/9461/0</a> Specify quantity		Minimum 5ft; Not available with 347V Please consult factory.	

# Beam 4

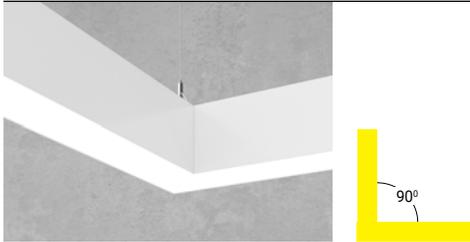

**IMPORTANT:** All corner patterns must be submitted with drawings indicating dimensions and angles degree.

15 business days

 [Click here for the spec sheet.](#)



## Ordering Guide

TB4DLEDPAT		PATTERNS AND LENGTH (SELECT ONE)		LUMENS/FT DIRECT		CRI		COLOUR TEMP.		SHIELDING DIRECT		SPECIFY LENGTH	
<b>TB4DLEDPAT</b>	Beam 4 Direct	<b>S(L)</b> square shape (length)	<b>400</b> 400 lm/ft - Minimum	<b>80</b>	80 CRI	<b>35</b>	3500 K	<b>SO</b>	spotless lens	<b>NL</b>	nominal		
		<b>R(LxL)</b> rectangular shape (length)	<b>1000</b> 1000 lm/ft - max for GZ, NW, WW, ASO.*			<b>30</b>	3000 K	<b>ASO</b>	asymmetric,	<b>EX</b>	exact		
		<b>U(LxLxL)</b> U shape (length)				<b>40</b>	4000 K	<b>BW</b>	batwing				
		<b>L(LxL)</b> L shape (length)	<b>1200</b> 1200 lm/ft - Maximum					<b>NW</b>	narrow				
								<b>GZ</b>	graze				
								<b>WW</b>	wallwash				
		Comes in 90 degree only.		Outputs between listed min and max are available. * 1000 lm/ft max. only for GZ, NW, WW and ASO.									

FINISH		VOLTAGE		DRIVER		CIRCUITS		MOUNTING/SUSPENSION				BATTERY (OPT.)	
<b>W</b>	white	<b>120</b>	120V	<b>DP</b>	dimming (0-10V) 1%	<b>1</b>	1 circuit	<b>CA(#)</b>	drywall+cable length (36"std)			<b>B(#)</b>	battery pack
<b>BLK</b>	black*	<b>277</b>	277V			<b>2</b>	2 circuit	<b>CT9(#)</b>	TB/TG 9/16+cable length (36" std.)				4' sections
<b>AP</b>	aluminum paint*	<b>347</b>	347V			<b>+E(#)</b>	emergency circuit	<b>CT15(#)</b>	TB/TG15/16+cable length (36" std.)				
		<b>UNV</b>	universal					<b>CTS(#)</b>	screw slot+cable length (36" std.)				
								<b>SA(#)</b>	drywall+stem length <48 (18"std)				
								<b>CASL(#)</b>	drywall cable sloped ceiling				
								<b>SASL(#)</b>	drywall stem sloped ceiling				
*Additional 5 business days required.								<a href="https://www.axislighting.com/download_file/9461/0">See Mounting kit guide for full specification code. https://www.axislighting.com/download_file/9461/0</a>				Requires 120V or 277V Please consult factory.	

# Beam 4



**IMPORTANT:** All corner patterns must be submitted with drawings indicating dimensions and angles degree.

15 business days


 [Click here for the spec sheet.](#)



## Ordering Guide

TB4ILEDPAT		PATTERNS AND LENGTH (SELECT ONE)		LUMENS/FT INDIRECT		CRI		COLOUR TEMP.		SHIELDING INDIRECT		SPECIFY LENGTH	
<b>TB4ILEDPAT</b>	Beam 4 Indirect	<b>S(L)</b>	square shape (length)	<b>400</b>	400 lm/ft - Min.	<b>80</b>	80 CRI	<b>30</b>	3000 K	<b>SO</b>	spotless lens	<b>NL</b>	nominal
		<b>R(LxL)</b>	rectangular shape (length)	<b>1200</b>	1200 lm/ft - Max.			<b>35</b>	3500 K	<b>BW</b>	batwing	<b>EX</b>	exact
		<b>U(LxLxL)</b>	U shape (length)					<b>40</b>	4000 K				
		<b>L(LxL)</b>	L shape (length)										
Comes in 90 degree only.				Outputs between listed min and max are available.									

FINISH		VOLTAGE		DRIVER		CIRCUITS		MOUNTING/SUSPENSION				BATTERY (OPT.)	
<b>W</b>	white	<b>120</b>	120V	<b>DP</b>	dimming (0-10V) 1%	<b>1</b>	1 circuit	<b>CA(#)</b>	drywall+cable length (36" std)			<b>B(#)</b>	battery pack
<b>BLK</b>	black*	<b>277</b>	277V			<b>2</b>	2 circuits	<b>CT9(#)</b>	TB/TG 9/16+cable length (36" std.)				4' sections
<b>AP</b>	aluminum paint*	<b>347</b>	347V			<b>+E(#)</b>	emergency circuit	<b>CT15(#)</b>	TB/TG15/16+cable length (36" std.)				
		<b>UNV</b>	universal					<b>CTS(#)</b>	screw slot+cable length (36" std.)				
								<b>SA(#)</b>	drywall+stem length <48 (18" std)				
								<b>CASL(#)</b>	drywall cable sloped ceiling				
								<b>SASL(#)</b>	drywall stem sloped ceiling				
*Additional 5 business days required.								<a href="https://www.axislighting.com/download_file/9461/0">See Mounting kit guide for full specification code. https://www.axislighting.com/download_file/9461/0</a> Specify quantity				Requires 120V or 277V Please consult factory.	



**IMPORTANT:** All corner patterns must be submitted with drawings indicating dimensions and angles degree.

15 business days



Click here for the spec sheet.





## Ordering Guide

SCDPAT		PATTERNS AND LENGTH (SELECT ONE)		LUMENS/FT DIRECT		CRI		COLOUR TEMP.		SHIELDING DIRECT		SPECIFY LENGTH	
SCDPAT	Sculpt Pendant Direct Patterns	S(L)	square shape (length)	300	300 lm/ft - Min.	80	80 CRI	30	3000 K	FL	flush	NL	nominal
		R(LxL)	rectangular shape (length)	1000	1000 lm/ft - Max.			35	3500 K	RG	0.5" Regressed	EX	exact
		U(LxLxL)	U shape (length)					40	4000 K	ASO	asymmetric		
		L(LxL)	L shape (length)										
Comes in 90 degree only.				Outputs between listed min and max are available				All lens options use spotless lens					

FINISH		VOLTAGE		DRIVER		CIRCUITS		MOUNTING/SUSPENSION				BATTERY (OPT.)	
W	white	120	120V	DP	dimming (0-10V) 1%	1	1 circuit	CA(#)	drywall+cable length (36" std.)			B(#)	battery pack
BLK	black*	277	277V			2	2 circuits	CT9(#)	TB/TG 9/16+cable length (36" std.)				
AP	aluminum paint*	347	347V			+E(#)	emergency circuit	CT15(#)	TB/TG15/16+cable length (36" std.)				
		UNV	universal					CTS(#)	screw slot+cable length (36" std.)				
								CASL(#)	drywall cable sloped ceiling				
								+SM	seismic kit				
*Additional 5 business days required.								<a href="https://www.axislighting.com/download_file/9461/0">See Mounting kit guide for full specification code.</a> <a href="https://www.axislighting.com/download_file/9461/0">https://www.axislighting.com/download_file/9461/0</a> Specify length				Remote, 5 feet linear length minimum required for integral battery; Please consult factory.	

# Sculpt

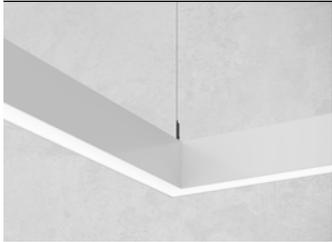

**IMPORTANT:** All corner patterns must be submitted with drawings indicating dimensions and angles degree.

15 business days



 [Click here for the spec sheet.](#)



## Ordering Guide

SCDIPAT		PATTERNS AND LENGTH (SELECT ONE)		LUMENS/FT INDIRECT		LUMENS/FT DIRECT		CRI		COLOUR TEMP.		SHIELDING INDIRECT	
<b>SCDIPAT</b>	Sculpt Pendant Direct/Indirect Patterns	<b>S(L)</b>	square shape (length)	<b>300</b>	300 lm/ft - Min.	<b>300</b>	300 lm/ft - Min.	<b>80</b>	80 CRI	<b>35</b>	3500 K	<b>SO</b>	spotless lens
		<b>R(LxL)</b>	rectangular shape (length)	<b>1000</b>	1000 lm/ft - Max.	<b>500</b>	500 lm/ft - Max.			<b>30</b>	3000 K	<b>BW</b>	batwing
		<b>U(LxLxL)</b>	U shape (length)							<b>40</b>	4000 K		
		<b>L(LxL)</b>	L shape (length)										
Comes in 90 degree only.				Outputs between listed min and max are available.									

SHIELDING DIRECT		SPECIFY LENGTH		FINISH		VOLTAGE		DRIVER		CIRCUITS		MOUNTING/SUSPENSION		BATTERY (OPTIONAL)	
<b>FL</b>	flush	<b>NL</b>	nominal	<b>W</b>	white	<b>120</b>	120V	<b>DP</b>	dimming (0-10V) 1%	<b>1</b>	1 circuit	<b>CA(#)</b>	drywall+cable length (36" std.)	<b>B(#)</b>	battery pack
<b>RG</b>	0.5" regressed	<b>EX</b>	exact	<b>BLK</b>	black*	<b>277</b>	277V			<b>2</b>	2 circuits	<b>CT9(#)</b>	TB/TG 9/16+cable length (36" std.)		
<b>ASO</b>	asymmetric			<b>AP</b>	aluminum paint*	<b>347</b>	347V			<b>+E(#)</b>	emergency circuit	<b>CT15(#)</b>	TB/TG15/16+cable length (36" std.)		
						<b>UNV</b>	universal					<b>CTS(#)</b>	screw slot+cable length (36" std.)		
												<b>CASL(#)</b>	drywall cable sloped ceiling		
												<b>+SM</b>	seismic kit		
Lens options use spotless lens				*Additional 5 business days required.								<a href="https://www.axislighting.com/download_file/9461/0">See Mounting kit guide for full specification code. https://www.axislighting.com/download_file/9461/0</a> Specify length		5' minimum. For lengths under 5' battery pack is remote only. Not available with 347V Please consult factory.	

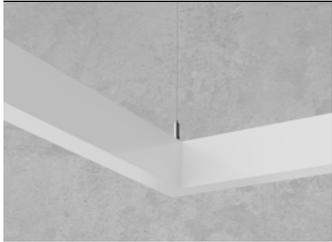

**IMPORTANT: All corner patterns must be submitted with drawings indicating dimensions and angles degree.**

15 business days



Click here for the spec sheet.




## Ordering Guide

SCIPAT		PATTERNS AND LENGTH (SELECT ONE)		LUMENS/FT INDIRECT		CRI		COLOUR TEMP.		SHIELDING INDIRECT		SPECIFY LENGTH	
<b>SCIPAT</b>	Sculpt Pendant Indirect Patterns	<b>S(L)</b>	square shape (length)	<b>300</b>	300 lm/ft - Minimum	<b>80</b>	80 CRI	<b>30</b>	3000 K	<b>SO</b>	spotless lens	<b>NL</b>	nominal
		<b>R(LxL)</b>	rectangular shape (length)	<b>1000</b>	1000 lm/ft - Maximum			<b>35</b>	3500 K	<b>BW</b>	batwing	<b>EX</b>	exact
		<b>U(LxLxL)</b>	U shape (length)					<b>40</b>	4000 K				
		<b>L(LxL)</b>	L shape (length)										
		Comes in 90 degree only.		Outputs between listed min and max are available.									


FINISH		VOLTAGE		DRIVER		CIRCUITS		MOUNTING/SUSPENSION			BATTERY (OPT.)	
<b>W</b>	white	<b>120</b>	120V	<b>DP</b>	dimming (0-10V) 1%	<b>1</b>	1 circuit	<b>CA(#)</b>	drywall+cable length (36" std.)		<b>B(#)</b>	battery pack
<b>BLK</b>	black*	<b>277</b>	277V			<b>2</b>	2 circuits	<b>CT9(#)</b>	TB/TG 9/16+cable length (36" std.)			4' sections
<b>AP</b>	aluminum paint*	<b>347</b>	347V			<b>+E(#)</b>	emergency circuit	<b>CT15(#)</b>	TB/TG15/16+cable length (36" std.)			
		<b>UNV</b>	universal					<b>CTS(#)</b>	screw slot+cable length (36" std.)			
								<b>CASL(#)</b>	drywall cable sloped ceiling			
								<b>+SM</b>	seismic kit			
*Additional 5 business days required.								<a href="https://www.axislighting.com/download_file/9461/0">See Mounting kit guide for full specification code.</a> <a href="https://www.axislighting.com/download_file/9461/0">https://www.axislighting.com/download_file/9461/0</a> Specify quantity			Not available with 347V Please consult factory.	

## Axis QuickShip: Corners | LINEAR RECESSED - 90° Corners


BEAM 2 SQUARE

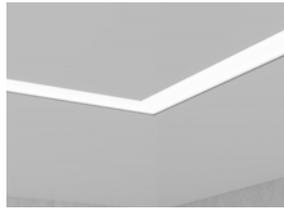


BEAM 3

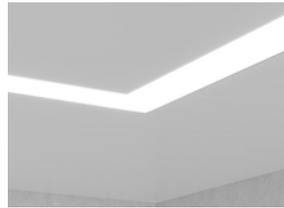


BEAM 4

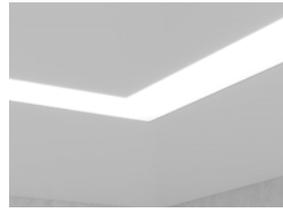

BEAM 6

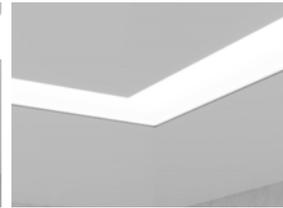

SCULPT

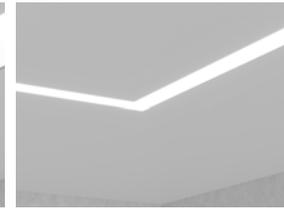

### OPTIONS


Corners	90° Corners	90° Corners	90° Corners	90° Corners	90° Corners
Patterns	Square, Rectangle, U and L shapes	Square, Rectangle, U and L shapes	Square, Rectangle, U and L shapes	Square, Rectangle, U and L shapes	Square, Rectangle, U and L shapes
Lumens	300lm/ft - 1000lm/ft	300lm/ft - 1100lm/ft	400lm/ft - 1200lm/ft	400lm/ft - 1200lm/ft	300lm/ft min - 1000lm/ft max
CRI	80	80	80	80	80
CCT	3000K - 3500K - 4000K	3000K - 3500K - 4000K	3000K - 3500K - 4000K	3000K - 3500K - 4000K	3000K - 3500K - 4000K
Shielding Down <sup>(1)</sup>	Flush / Regressed / Asymmetric / Batwing / Narrow / Graze / Wall Wash	Flush / Regressed / Asymmetric / Batwing / Narrow / Graze / Wall Wash	Flush / Regressed / Asymmetric / Batwing / Narrow / Graze / Wall Wash	Flush / Regressed	Flush / Asymmetric
Shielding Up	N/A	N/A	N/A	N/A	N/A
Finish	White / Black <sup>(2)</sup> / Aluminum <sup>(2)</sup>	White / Black <sup>(2)</sup> / Aluminum <sup>(2)</sup>	White / Black <sup>(2)</sup> / Aluminum <sup>(2)</sup>	White / Black <sup>(2)</sup> / Aluminum <sup>(2)</sup>	White / Black <sup>(2)</sup> / Aluminum <sup>(2)</sup>
Voltage	120V / 277V / 347V / UNV	120V / 277V / 347V / UNV	120V / 277V / 347V / UNV	120V / 277V / 347V / UNV	120V / 277V / 347V / UNV
Driver	Dimming (0-10V) 1%	Dimming (0-10V) 1%	Dimming (0-10V) 1%	Dimming (0-10V) 1%	Dimming (0-10V) 1%
Circuits	1, 2	1, 2	1, 2	1, 2	1, 2
Mounting <sup>(3)</sup>	Drywall / T-bar / Tegular	Drywall / T-bar / Tegular	Drywall / T-bar / Tegular	Drywall / T-bar / Tegular	Drywall / T-bar / Tegular

### OPTIONAL

- (1) For vertical recessed only applies Spotless Lens.  
 (2) Additional 5 business days required.  
 (3) For vertical recessed only applies Drywall.  
 (4) For vertical recessed only applies End feed / Flex whip.

Battery	Battery pack	Battery pack	Battery pack	Battery pack	Battery pack
Others <sup>(4)</sup>	End feed / Flex whip / Chicago plenum	End feed / Flex whip / Chicago plenum	End feed / Flex whip / Chicago plenum	End feed / Flex whip / Chicago plenum	Flex whip / Chicago plenum

# Beam 2 Square

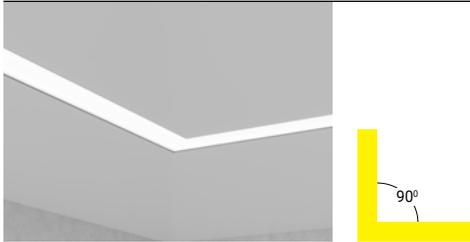

**IMPORTANT: All corner patterns must be submitted with drawings indicating dimensions and angles degree.**

**15 business days**

 [Click here for the spec sheet.](#)



## Ordering Guide

B2SQRLEDPAT		PATTERNS (SELECT ONE)		LUMENS/FT		CRI		COLOUR TEMP.		SHIELDING		SPECIFY LENGTH			
<b>B2SQRLEDPAT</b>	Beam 2 Square Recessed LED	<b>S(L)*</b> square shape (length)	<b>300</b> 300 lm/ft - min	<b>80</b> 80 CRI	<b>30</b> 3000 K	<b>SO</b> spotless lens	<b>NL</b> nominal	<b>35</b> 3500 K	<b>ASO</b> asymmetric, flush only	<b>EX</b> exact	<b>BW</b> batwing, flush only	<b>NW</b> narrow, flush only	<b>GZ</b> graze, flush only	<b>WW</b> wallwash, flush only	
		<b>R(LxL)*</b> rectangular shape (length)	<b>750</b> 750 lm/ft - max for GZ, NW, WW, ASO.*												<b>40</b> 4000 K
		<b>U(LxLxL)*</b> U shape (length)	<b>1000</b> 1000 lm/ft - max												
		<b>L(LxL)*</b> L shape (length)													
		*Comes in 90 degree only.		Outputs between listed min and max are available. * 750 lm/ft max. only for GZ, NW, WW and ASO.											

FINISH		VOLTAGE		DRIVER		CIRCUITS		MOUNTING				BATTERY (OPT.)		OTHER (OPT.)						
<b>W</b>	white	<b>120</b>	120V	<b>DP</b> dimming (0-10V) 1%	<b>1</b> 1 circuit	<b>TB9</b> t-bar 9/16"	<b>TB15</b> t-bar 15/16"	<b>ST</b> screw slot t-bar	<b>TG9</b> tegular 9/16"	<b>TG15</b> tegular 15/16"	<b>DF</b> drywall flange	<b>D</b> drywall flangeless	<b>DS</b> drywall spackle flange	<b>B#</b> battery pack 4' sections	<b>EF</b> end feed					
<b>BLK</b>	black*	<b>277</b>	277V													<b>2</b> 2 circuits	<b>DF</b> drywall flange	<b>D</b> drywall flangeless	<b>DS</b> drywall spackle flange	<b>FW(#)</b> flex whip (6' std)
<b>AP</b>	aluminum paint*	<b>347</b>	347V																	
		<b>UNV</b>	universal																	
* Additional 5 business days required.						<a href="https://www.axislighting.com/download_file/9461/0">See Mounting kit guide for full specification code. https://www.axislighting.com/download_file/9461/0</a>				Requires 120V or 277V Please consult factory.										

# Beam 3



**IMPORTANT: All corner patterns must be submitted with drawings indicating dimensions and angles degree.**

15 business days

 [Click here for the spec sheet.](#)



## Ordering Guide

BMRLEDPAT		PATTERNS AND LENGTH (SELECT ONE)		LUMENS/FT DIRECT		CRI		COLOUR TEMP.		SHIELDING DIRECT		SPECIFY LENGTH	
BMRLEDPAT	Beam 3 Recessed	S(L)	square shape (length)	300	300 lm/ft - min	80	80 CRI	35	3500 K	FL	flush	NL	nominal
		R(LxL)	rectangular shape (length)	1000	1000 lm/ft - max for GZ, NW, WW, ASO.*			30	3000 K	RG	regressed	EX	exact
		U(LxLxL)	U shape (length)					40	4000 K	ASO	asymmetric, flush only		
		L(LxL)	L shape (length)	1100	1100 lm/ft - max					BW	batwing, flush only		
										NW	narrow, flush only		
										GZ	graze, flush only		
										WW	wallwash, flush only		
			Comes in 90 degree only.	Outputs between listed min and max are available. * 1000 lm/ft max. only for GZ, NW, WW and ASO.						Lens options use spotless lens. Choose only one of the options above.			

FINISH		VOLTAGE		DRIVER		CIRCUITS		MOUNTING				BATTERY (OPT.)		OTHER (OPT.)	
W	white	120	120V	DP	dimming (0-10V) 1%	1	1 circuit	TB9	t-bar 9/16"			B#	battery pack	EF	end feed
BLK	black*	277	277V			2	2 circuits	TB15	t-bar 15/16"				4' sections	FW(#)	flex whip (6' std)
AP	aluminum paint*	347	347V			+E(#)	emergency circuit	ST	screw slot t-bar					CP	Chicago plenum
		UNV	universal					TG9	tegar 9/16"						
								TG15	tegar 15/16"						
								DF	drywall flange						
								D	drywall flangeless						
								DB	slip-through bracket						
								DS	drywall spackle flange						
								TX	tx Hunter Douglas techstyle*						
* Additional 5 business days required.								*TX available with flush lens only				Requires 120V or 277V Please consult factory.			

# Beam 4



**IMPORTANT: All corner patterns must be submitted with drawings indicating dimensions and angles degree.**

15 business days

 [Click here for the spec sheet.](#)




## Ordering Guide

BBRLEDPAT		PATTERNS AND LENGTH (SELECT ONE)		LUMENS/FT DIRECT		CRI		COLOUR TEMP.		SHIELDING DIRECT		SPECIFY LENGTH	
<b>BBRLEDPAT</b>	Beam 4 Recessed	<b>S(L)</b> square shape (length)	<b>400</b> 400 lm/ft - Minimum	<b>80</b>	80 CRI	<b>35</b>	3500 K	<b>FL</b>	flush	<b>NL</b>	nominal		
		<b>R(LxL)</b> rectangular shape (length)	<b>1000</b> 1000 lm/ft - max for GZ, NW, WW, ASO.*			<b>30</b>	3000 K	<b>RG</b>	regressed	<b>EX</b>	exact		
		<b>U(LxLxL)</b> U shape (length)				<b>40</b>	4000 K	<b>ASO</b>	asymmetric, flush only				
		<b>L(LxL)</b> L shape (length)	<b>1200</b> 1200 lm/ft - Maximum					<b>BW</b>	batwing, flush only				
								<b>NW</b>	narrow, flush only				
								<b>GZ</b>	graze, flush only				
								<b>WW</b>	wallwash, flush only				
		Comes in 90 degree only.		Outputs between listed min and max are available. * 1000 lm/ft max. only for GZ, NW, WW and ASO.						Lens options use spotless lens. Choose only one of the options above.			

FINISH		VOLTAGE		DRIVER		CIRCUITS		MOUNTING				BATTERY (OPT.)		OTHER (OPT.)	
<b>W</b>	white	<b>120</b>	120V	<b>DP</b>	dimming (0-10V) 1%	<b>1</b>	1 circuit	<b>TB9</b>	t-bar 9/16"	<b>B#</b>	battery pack	<b>EF</b>	end feed		
<b>BLK</b>	black*	<b>277</b>	277V			<b>2</b>	2 circuits	<b>TB15</b>	t-bar 15/16"		4' sections	<b>FW(#)</b>	flex whip (6' std)		
<b>AP</b>	aluminum paint*	<b>347</b>	347V			<b>+E(#)</b>	emergency circuit	<b>ST</b>	screw slot t-bar			<b>CP</b>	Chicago plenum		
		<b>UNV</b>	universal					<b>TG9</b>	tegular 9/16"						
								<b>TG15</b>	tegular 15/16"						
								<b>DF</b>	drywall flange						
								<b>D</b>	drywall flangeless						
								<b>DB</b>	slip-through bracket						
								<b>DS</b>	drywall spackle flange						
								<b>TX</b>	tx Hunter Douglas techstyle*						
* Additional 5 business days required.								*TX available with flush lens only				Requires 120V or 277V Please consult factory.			

# Beam 6

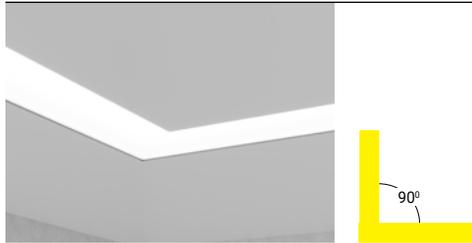

**IMPORTANT:** All corner patterns must be submitted with drawings indicating dimensions and angles degree.

15 business days



 [Click here for the spec sheet.](#)



## Ordering Guide

B6RLEDPAT		PATTERNS (SELECT ONE)		LUMENS/FT		CRI		COLOUR TEMP.		SHIELDING		SPECIFY LENGTH	
<b>B6RLEDPAT</b>	Beam 6 Recessed	<b>S(L)</b> square shape (length)	<b>400</b> 400 lm/ft - Minimum	<b>80</b>	80 CRI	<b>30</b>	3000 K	<b>FL</b>	flush	<b>NL</b>	nominal		
		<b>R(LxL)</b> rectangular shape (length)	<b>1200</b> 1200 lm/ft - Maximum			<b>35</b>	3500 K	<b>RG</b>	regressed	<b>EX</b>	exact		
		<b>U(LxLxL)</b> U shape (length)				<b>40</b>	4000 K						
		<b>L(LxL)</b> L shape (length)											
Comes in 90 degree only				Outputs between listed min and max are available.									

FINISH		VOLTAGE		DRIVER		CIRCUITS		MOUNTING		BATTERY		OTHER (OPT.)	
<b>W</b>	white	<b>120</b>	120V	<b>DP</b>	dimming (0-10V) 1%	<b>1</b>	1 circuit	<b>TB9</b>	t-bar 9/16"	<b>B#</b>	battery pack	<b>EF</b>	end feed
<b>BLK</b>	black*	<b>277</b>	277V			<b>2</b>	2 circuits	<b>TB15</b>	t-bar 15/16"		4' sections	<b>FW(#)</b>	flex whip (6' std)
<b>AP</b>	aluminum paint*	<b>347</b>	347V			<b>+E(#)</b>	emergency circuit	<b>ST</b>	screw slot t-bar			<b>CP</b>	Chicago plenum
		<b>UNV</b>	universal					<b>TG9</b>	tegular 9/16"				
								<b>TG15</b>	tegular 15/16"				
								<b>DF</b>	drywall flange				
								<b>D</b>	drywall flangeless				
								<b>DB</b>	slip-through bracket				
								<b>DS</b>	drywall spackle flange				
* Additional 5 business days required.										Requires 120V or 277V Please consult factory.			

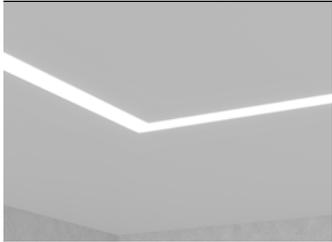

**IMPORTANT: All corner patterns must be submitted with drawings indicating dimensions and angles degree.**

15 business days



Click here for the spec sheet.



## Ordering Guide

SCRPAT		PATTERNS AND LENGTH (SELECT ONE)		LUMENS/FT DIRECT		CRI		COLOUR TEMP.		SHIELDING DIRECT		SPECIFY LENGTH	
SCRPAT	Sculpt Recessed Patterns	S(L)	square shape (length)	300	300 lm/ft - Minimum	80	80 CRI	30	3000 K	FL	flush	NL	nominal
		R(LxL)	rectangular shape (length)	1000	1000 lm/ft - Maximum			35	3500 K	ASO	asymmetric	EX	exact
		U(LxLxL)	U shape (length)					40	4000 K				
		L(LxL)	L shape (length)										
Comes in 90 degree only.				Outputs between listed min and max are available.				Lens options use spotless lens.					

FINISH		VOLTAGE		DRIVER		CIRCUITS		MOUNTING				BATTERY (OPT.)		OTHER (OPT.)	
W	white	120	120 V	DP	dimming (0-10V) 1%	1	1 circuit	MFTB9	MiniFlange t-bar 9/16"	ST	screw slot t-bar	B(#)	battery pack 4' sections	FW(#)	flex whip (6' std)
BLK	black*	277	277 V			2	2 circuits	MFTB15	MiniFlange t-bar 15/16"	TG9	tegar 9/16"			CP	Chicago plenum
AP	aluminum paint*	347	347 V			+E(#)	emergency circuit	MFST	MiniFlange screw slot t-bar	TG15	tegar 15/16"				
		UNV	universal					MFTG9	MiniFlange 9/16" t-tegar	DF	drywall flange				
								MFTG15	MiniFlange 15/16" t-tegar	D	drywall flangeless				
								TB9	t-bar 9/16"	DB	slip-through bracket				
								TB15	t-bar 15/16"	DS	drywall spackle flange				
*Additional 5 business days required.												Not available with 347V Please consult factory.			

## Axis QuickShip: Corners | SURFACE - 90° Corners


BEAM 2 SQUARE



BEAM 3



BEAM 4

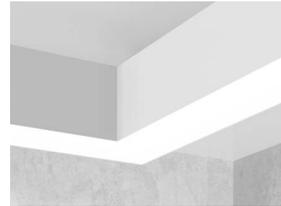

SCULPT



### OPTIONS

Corners	90° Corners	90° Corners	90° Corners	90° Corners
Patterns	Square, Rectangle, U and L shapes	Square, Rectangle, U and L shapes	Square, Rectangle, U and L shapes	Square, Rectangle, U and L shapes
Lumens	300lm/ft - 1000lm/ft	300lm/ft - 1100lm/ft	400lm/ft - 1200lm/ft	300lm/ft min - 1000lm/ft max
CRI	80	80	80	80
CCT	3000K - 3500K - 4000K	3000K - 3500K - 4000K	3000K - 3500K - 4000K	3000K - 3500K - 4000K
Shielding Down	Spotless Lens / Asymmetric / Batwing / Narrow / Graze / Wall Wash	Spotless Lens / Asymmetric / Batwing / Narrow / Graze / Wall Wash	Spotless Lens / Asymmetric / Batwing / Narrow / Graze / Wall Wash	Spotless lens / Asymmetric / Regressed
Finish	White / Black <sup>(1)</sup> / Aluminum <sup>(1)</sup>	White / Black <sup>(1)</sup> / Aluminum <sup>(1)</sup>	White / Black <sup>(1)</sup> / Aluminum <sup>(1)</sup>	White / Black <sup>(1)</sup> / Aluminum <sup>(1)</sup>
Voltage	120V / 277V / 347V / UNV	120V / 277V / 347V / UNV	120V / 277V / 347V / UNV	120V / 277V / 347V / UNV
Driver	Dimming (0-10V) 1%	Dimming (0-10V) 1%	Dimming (0-10V) 1%	Dimming (0-10V) 1%
Circuits	1, 2	1, 2	1, 2	1, 2
Mounting	Drywall / T-bar / Tegular / Solid ceiling	Drywall / T-bar / Tegular / Solid ceiling	Drywall / T-bar / Tegular / Solid ceiling	Drywall / T-bar / Tegular / Solid ceiling
<b>OPTIONAL</b>				
Battery	Battery pack	Battery pack	Battery pack	Battery pack

(1) Additional 5 business days required.

# Beam 2 Square



**IMPORTANT: All corner patterns must be submitted with drawings indicating dimensions and angles degree.**

**15 business days**

 [Click here for the spec sheet.](#)




## Ordering Guide

B2SQSLEDPAT		PATTERNS AND LENGTH (SELECT ONE)		LUMENS/FT		CRI		COLOUR TEMP.		SHIELDING DIRECT		SPECIFY LENGTH	
<b>B2SQSLEDPAT</b>	Beam 2 Square Surface	<b>S(L)*</b> square shape (length)	<b>300</b> 300 lm/ft - Minimum	<b>80</b> 80 CRI	<b>30</b> 3000 K <b>35</b> 3500 K <b>40</b> 4000 K	<b>SO</b> spotless lens <b>ASO</b> asymmetric, flush only <b>BW</b> batwing, flush only <b>NW</b> narrow, flush only <b>GZ</b> graze, flush only <b>WW</b> wallwash, flush only	<b>NL</b> nominal <b>EX</b> exact	<b>R(LxL)*</b> rectangular shape (length)	<b>750</b> 750 lm/ft - max for GZ, NW, WW, ASO*				
		<b>U(LxLxL)*</b> U shape (length)											
		<b>L(LxL)*</b> L shape (length)	<b>1000</b> 1000 lm/ft - max										
		*Comes in 90 degree only.		Outputs between listed min and max are available. * 750 lm/ft max. only for GZ, NW, WW and ASO.									

FINISH		VOLTAGE		DRIVER		CIRCUITS		MOUNTING		BATTERY (OPT.)	
<b>W</b>	white	<b>120</b>	120V	<b>DP</b>	dimming (0-10V) 1%	<b>1</b>	1 circuit	<b>S</b>	surface drywall ceiling	<b>B(#)</b>	battery pack 4' sections
<b>BLK</b>	black*	<b>277</b>	277V			<b>2</b>	2 circuits				
<b>AP</b>	aluminum paint*	<b>347</b>	347V			<b>+E(#)</b>	emergency circuit				
		<b>UNV</b>	universal							Requires 120V or 277V Please consult factory.	

\* Additional 5 business days required.

# Beam 3



**IMPORTANT: All corner patterns must be submitted with drawings indicating dimensions and angles degree.**

15 business days

 [Click here for the spec sheet.](#)



## Ordering Guide

TB3SLEDPAT		PATTERNS AND LENGTH (SELECT ONE)		LUMENS/FT		CRI		COLOUR TEMP.		SHIELDING DIRECT		
<b>TB3SLEDPAT</b>	Beam 3 Surface	<b>S(L)</b> square shape (length)	<b>300</b> 300 lm/ft - min	<b>80</b> 80 CRI	<b>30</b> 3000 K	<b>SO</b> spotless lens	<b>ASO</b> asymmetric	<b>BW</b> batwing	<b>NW</b> narrow	<b>GZ</b> graze	<b>WW</b> wallwash	
		<b>R(LxL)</b> rectangular shape (length)	<b>1000</b> 1000 lm/ft - max for GZ, NW, WW, ASO.*									<b>35</b> 3500 K
		<b>U(LxLxL)</b> U shape (length)	<b>1100</b> 1100 lm/ft - max									<b>40</b> 4000 K
		<b>L(LxL)</b> L shape (length)										
		Comes in 90 degree only.		Outputs between listed min and max are available. * 1000 lm/ft max. only for GZ, NW, WW and ASO.						Choose only one of the options above		

SPECIFY LENGTH		FINISH		VOLTAGE		DRIVER		CIRCUITS		MOUNTING		BATTERY (OPT.)	
<b>NL</b> nominal	<b>W</b> white	<b>120</b> 120V	<b>DP</b> dimming (0-10V) 1%	<b>1</b> 1 circuit	<b>S</b> surface drywall ceiling	<b>B(#)</b> battery pack 4' sections							
<b>EX</b> exact	<b>BLK</b> black*	<b>277</b> 277V		<b>2</b> 2 circuits	<b>SB</b> surface t-bar ceiling								
	<b>AP</b> aluminum paint*	<b>347</b> 347V		<b>+E(#)</b> emergency circuit	<b>SC</b> surface solid ceiling								
		*Additional 5 business days required.								Requires 120V or 277V Please consult factory.			

# Beam 4



**IMPORTANT:** All corner patterns must be submitted with drawings indicating dimensions and angles degree.

15 business days


 [Click here for the spec sheet.](#)



## Ordering Guide

TB4SLEDPAT		PATTERNS AND LENGTH (SELECT ONE)		LUMENS/FT		CRI		COLOUR TEMP.		SHIELDING DIRECT			
<b>TB4SLEDPAT</b>	Beam 3 Surface	<b>S(L)</b>	square shape (length)	<b>400</b>	400 lm/ft - Minimum	<b>80</b>	80 CRI	<b>30</b>	3000 K	<b>SO</b>	spotless lens		
		<b>R(LxL)</b>	rectangular shape (length)	<b>1000</b>	1000 lm/ft - max for GZ, NW, WW, ASO.*			<b>35</b>	3500 K	<b>ASO</b>	Asymmetric	<b>BW</b>	Batwing
		<b>U(LxLxL)</b>	U shape (length)	<b>1200</b>	1200 lm/ft - Maximum			<b>40</b>	4000 K	<b>NW</b>	Narrow	<b>GZ</b>	Graze
		<b>L(LxL)</b>	L shape (length)							<b>WW</b>	Wallwash		
Comes in 90 degree only.				Outputs between listed min and max are available. * 1000 lm/ft max. only for GZ, NW, WW and ASO.				Choose only one of the options above					

SPECIFY LENGTH		FINISH		VOLTAGE		DRIVER		CIRCUITS		MOUNTING		BATTERY (OPT.)	
<b>NL</b>	nominal	<b>W</b>	white	<b>120</b>	120V	<b>DP</b>	dimming (0-10V) 1%	<b>1</b>	1 circuit	<b>SB9</b>	surface TB/TG 9/16	<b>B(#)</b>	battery pack (integral)
<b>EX</b>	exact	<b>BLK</b>	black*	<b>277</b>	277V			<b>2</b>	2 circuits	<b>SB15</b>	surface TB/TG 15/16		
		<b>AP</b>	aluminum paint*	<b>347</b>	347V			<b>+E(#)</b>	emergency circuit	<b>SBS</b>	surface screw slot t-bar		
				<b>UNV</b>	universal					<b>S</b>	surface drywall ceiling		
										<b>SC</b>	surface solid ceiling		
*Additional 5 business days required.												Minimum 5ft; Not available with 347V Please consult factory.	



**IMPORTANT: All corner patterns must be submitted with drawings indicating dimensions and angles degree.**

**15 business days**



Click here for the spec sheet.



## Ordering Guide

SCSPAT													
PRODUCT ID		PATTERNS AND LENGTH (SELECT ONE)		LUMENS/FT		CRI		COLOUR TEMP.		SHIELDING DIRECT		SPECIFY LENGTH	
SCSPAT	Sculpt Surface Patterns	S(L)	square shape (length)	300	300 lm/ft - Min.	80	80 CRI	30	3000 K	FL	flush	NL	nominal
		R(LxL)	rectangular shape (length)	1000	1000 lm/ft - Max.			35	3500 K	RG	0.5" regressed	EX	exact
		U(LxLxL)	U shape (length)					40	4000 K	ASO	asymmetric		
		L(LxL)	L shape (length)										
		Comes in 90 degree only.		Outputs between listed min and max are available.						Lens options use spotless lens			

FINISH		VOLTAGE		DRIVER		CIRCUITS		MOUNTING		BATTERY (OPT.)	
W	white	120	120V	DP	dimming (0-10V) 1%	1	1 circuit	S	surface drywall ceiling	B(#)	battery pack 4' sections
BLK	black*	277	277V			2	2 circuits	SB	surface t-bar ceiling		
AP	aluminum paint*	347	347V			+E(#)	emergency circuit	SC	surface solid ceiling		
		UNV	universal								
*Additional 5 business days required.										Requires 120V or 277V Please consult factory.	

## Axis QuickShip: Corners | WALL - 90° Corners

BEAM 2




BEAM 2 SQUARE



BEAM 3



BEAM 4

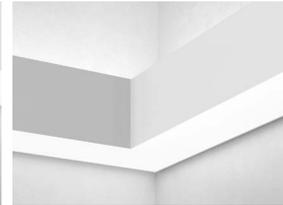

SCULPT



### OPTIONS



Corners	90° Corners	90° Corners	90° Corners	90° Corners	90° Corners
Patterns	Square, Rectangle, U and L shapes	Square, Rectangle, U and L shapes	Square, Rectangle, U and L shapes	Square, Rectangle, U and L shapes	Square, Rectangle, U and L shapes
Distribution	Direct - Indirect - Direct / Indirect	Direct	Direct - Indirect - Direct / Indirect	Direct - Indirect - Direct / Indirect	Direct - Indirect - Direct / Indirect
Lumens	300lm/ft min - 1000lm/ft max Down 300lm/ft min - 1100lm/ft max Up	300lm/ft - 1000lm/ft Down	300lm/ft - 1100lm/ft Down 300lm/ft - 1200lm/ft Up	400lm/ft - 1200lm/ft Down 400lm/ft - 1200lm/ft Up	300lm/ft min - 500lm/ft max Down 300lm/ft min - 1000lm/ft max Up
CRI	80	80	80	80	80
CCT	3000K - 3500K - 4000K	3000K - 3500K - 4000K	3000K - 3500K - 4000K	3000K - 3500K - 4000K	3000K - 3500K - 4000K
Shielding Down	Spotless Lens / Asymmetric / Narrow / Graze	Spotless Lens / Asymmetric / Narrow / Graze	Spotless Lens / Asymmetric / Narrow / Graze	Spotless Lens / Asymmetric / Narrow / Graze	Flush / Regressed / Asymmetric
Shielding Up	Spotless Lens	N/A	Spotless Lens	Spotless Lens	Spotless Lens
Finish	White / Black <sup>(1)</sup> / Aluminum <sup>(1)</sup>	White / Black <sup>(1)</sup> / Aluminum <sup>(1)</sup>	White / Black <sup>(1)</sup> / Aluminum <sup>(1)</sup>	White / Black <sup>(1)</sup> / Aluminum <sup>(1)</sup>	White / Black <sup>(1)</sup> / Aluminum <sup>(1)</sup>
Voltage	120V / 277V / 347V / UNV	120V / 277V / 347V / UNV	120V / 277V / 347V / UNV	120V / 277V / 347V / UNV	120V / 277V / 347V / UNV
Driver	Dimming (0-10V) 1%	Dimming (0-10V) 1%	Dimming (0-10V) 1%	Dimming (0-10V) 1%	Dimming (0-10V) 1%
Circuits	1, 2	1, 2	1, 2	1, 2	1, 2
Mounting	Wall	Wall	Wall	Wall	Wall

(1) Additional 5 business days required.

### OPTIONAL

Battery	Battery pack				
---------	--------------	--------------	--------------	--------------	--------------

# Beam 2

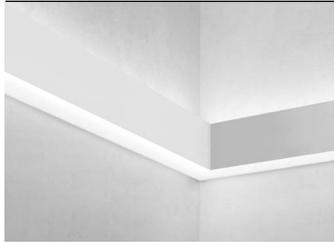

**IMPORTANT:** All corner patterns must be submitted with drawings indicating dimensions and angles degree.

15 business days

 [Click here for the spec sheet.](#)





## Ordering Guide

TB2WDILEDPAT		PATTERNS AND LENGTH (SELECT ONE)		LUMENS/FT INDIRECT		LUMENS/FT DIRECT		CRI		COLOUR TEMP.		SHIELDING INDIRECT	
<b>TB2WDILEDPAT</b>	Beam 2 Wall Direct/Indirect	<b>S(L)*</b> square shape (length)		<b>300</b>	300 lm/ft-Min	<b>300</b>	300 lm/ft - Min.	<b>80</b>	80 CRI	<b>30</b>	3000 K	<b>SO</b>	spotless lens
		<b>R(LxL)*</b> rectangular shape (length)		<b>1100</b>	1100 lm/ft-Max	<b>750</b>	750 lm/ft - max for GZ, NW, ASO*			<b>35</b>	3500 K		
		<b>U(LxLxL)*</b> U shape (length)				<b>1000</b>	1000 lm/ft - max			<b>40</b>	4000 K		
		<b>L(LxL)*</b> L shape (length)											
		*Comes in 90 degree only.		Outputs between listed min and max are available.		Outputs between listed min and max are available. * 750 lm/ft max. only for GZ, NW and ASO.							

SHIELDING DIRECT		SPECIFY LENGTH		FINISH		VOLTAGE		DRIVER		CIRCUITS		BATTERY (OPT.)	
<b>SO</b>	spotless lens	<b>NL</b>	nominal	<b>W</b>	white	<b>120</b>	120V	<b>DP</b>	dimming (0-10V) 1%	<b>1</b>	1 circuit	<b>B(#)</b>	battery pack
<b>ASO</b>	asymmetric, flush only	<b>EX</b>	exact	<b>BLK</b>	black*	<b>277</b>	277V			<b>2</b>	2 circuits		4' sections
<b>NW</b>	narrow, flush only			<b>AP</b>	aluminum paint*	<b>347</b>	347V			<b>+E(#)</b>	emergency circuit		
<b>GZ</b>	graze, flush only					<b>UNV</b>	universal						
				*Additional 5 business days required.								Requires 120V or 277V Please consult factory.	

# Beam 2

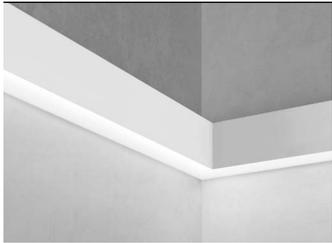

**IMPORTANT: All corner patterns must be submitted with drawings indicating dimensions and angles degree.**

**15 business days**

 [Click here for the spec sheet.](#)





## Ordering Guide

TB2WDLEDPAT								
PRODUCT ID		PATTERNS AND LENGTH (SELECT ONE)	LUMENS/FT		CRI	COLOUR TEMP.	SHIELDING DIRECT	
TB2WDLEDPAT	Beam 2 Wall Direct	S(L)* square shape (length)	300	300 lm/ft - min	80	80 CRI	35 3500 K 30 3000 K 40 4000 K	SO spotless lens ASO asymmetric, flush only NW narrow, flush only GZ graze, flush only
		R(LxL)* rectangular shape (length)	750	750 lm/ft - max for GZ, NW, ASO*				
		U(LxLxL)* U shape (length)						
		L(LxL)* L shape (length)	1000	1000 lm/ft - max				
		*Comes in 90 degree only.	Outputs between listed min and max are available. * 750 lm/ft max. only for GZ, NW and ASO.					

SPECIFY LENGTH		FINISH	VOLTAGE	DRIVER	CIRCUITS	BATTERY (OPT.)
NL	nominal	W white	120 120V	DP dimming (0-10V) 1%	1 1 circuit	B(#) battery pack 4' sections
EX	exact	BLK black*	277 277V		2 2 circuits	
		AP aluminum paint*	347 347V		+E(#) emergency circuit	
			UNV universal			
		*Additional 5 business days required.				Requires 120V or 277V Please consult factory.

# Beam 2

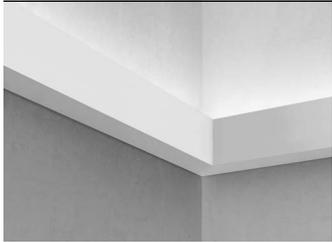

**IMPORTANT:** All corner patterns must be submitted with drawings indicating dimensions and angles degree.

15 business days

 [Click here for the spec sheet.](#)





## Ordering Guide

TB2WILEDPAT											
PRODUCT ID		PATTERNS AND LENGTH (SELECT ONE)		LUMENS/FT INDIRECT		CRI		COLOUR TEMP.		SHIELDING INDIRECT	
TB2WILEDPAT	Beam 2 Wall Indirect	S(L)*	square shape (length)	300	300 lm/ft-Min	80	80 CRI	30	3000 K	SO	spotless lens
		R(LxL)*	rectangular shape (length)	1100	1100 lm/ft-Max			35	3500 K		
		U(LxLxL)*	U shape (length)					40	4000 K		
		L(LxL)*	L shape (length)								
		*Comes in 90 degree only.		Outputs between listed min and max are available.							
										<b>NL</b> nominal <b>EX</b> exact	

FINISH	VOLTAGE	DRIVER	CIRCUITS	BATTERY (OPT.)
W white	120 120V	DP dimming (0-10V) 1%	1 1 circuit	B(#) battery pack 4' sections
BLK black*	277 277V		2 2 circuits	
AP aluminum paint*	347 347V		+E(#) emergency circuit	
	UNV universal			
*Additional 5 business days required.				Requires 120V or 277V Please consult factory.

# Beam 2 Square

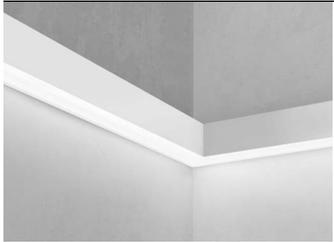

**IMPORTANT:** All corner patterns must be submitted with drawings indicating dimensions and angles degree.

15 business days



Click here for the spec sheet.





## Ordering Guide

B2SQWDLEDPAT		PATTERNS AND LENGTH (SELECT ONE)		LUMENS/FT		CRI		COLOUR TEMP.		SHIELDING DIRECT	
<b>B2SQWDLEDPAT</b>	Beam 2 Square Wall Direct	<b>S(L)*</b> square shape (length)	<b>300</b> 300 lm/ft - Minimum	<b>80</b> 80 CRI	<b>30</b> 3000 K	<b>35</b> 3500 K	<b>40</b> 4000 K	<b>SO</b> spotless lens	<b>ASO</b> asymmetric, flush only	<b>NW</b> narrow, flush only	<b>GZ</b> graze, flush only
		<b>R(LxL)*</b> rectangular shape (length)	<b>750</b> 750 lm/ft - max for								
		<b>U(LxLxL)*</b> U shape (length)	GZ, NW, WW, ASO*								
		<b>L(LxL)*</b> L shape (length)	<b>1000</b> 1000 lm/ft - max								
		*Comes in 90 degree only.		Outputs between listed min and max are available.							
				* 750 lm/ft max. only for GZ, NW, WW and ASO.							

SPECIFY LENGTH		FINISH		VOLTAGE		DRIVER		CIRCUITS		BATTERY (OPT.)	
<b>NL</b> nominal		<b>W</b> white		<b>120</b> 120V		<b>DP</b> dimming (0-10V) 1%		<b>1</b> 1 circuit		<b>B(#)</b> battery pack	
<b>EX</b> exact		<b>BLK</b> black*		<b>277</b> 277V				<b>2</b> 2 circuits		4' sections	
		<b>AP</b> aluminum paint*		<b>347</b> 347V				<b>+E(#)</b> emergency circuit			
				<b>UNV</b> universal							
		*Additional 5 business days required.								Requires 120V or 277V Please consult factory.	

# Beam 3

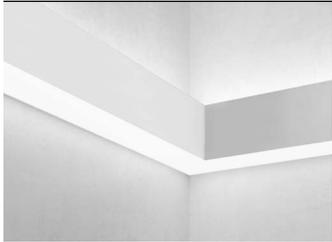

**IMPORTANT:** All corner patterns must be submitted with drawings indicating dimensions and angles degree.

15 business days

 [Click here for the spec sheet.](#)





## Ordering Guide

TB3WDILEDPAT											
PRODUCT ID		PATTERNS AND LENGTH (SELECT ONE)		LUMENS/FT INDIRECT		LUMENS/FT DIRECT		CRI		COLOUR TEMP.	
TB3WDILEDPAT	Beam 3 Wall Direct/Indirect	S(L)	square shape (length)	300	300 lm/ft - min	300	300 lm/ft - min	80	80 CRI	30	3000 K
		R(LxL)	rectangular shape (length)	1200	1200 lm/ft - max	1000	1000 lm/ft - max for GZ, NW, ASO.*			35	3500 K
		U(LxLxL)	U shape (length)							40	4000 K
		L(LxL)	L shape (length)			1100	1100 lm/ft - max				
		Comes in 90 degree only.		Outputs between listed min and max are available.		Outputs between listed min and max are available. * 1000 lm/ft max. only for GZ, NW and ASO.					

SHIELDING DIRECT		SPECIFY LENGTH		FINISH		VOLTAGE		DRIVER		CIRCUITS		BATTERY (OPT.)	
SO	spotless lens	NL	nominal	W	white	120	120V	DP	dimming (0-10V) 1%	1	1 circuit	B(#)	battery pack
ASO	asymmetric	EX	exact	BLK	black*	277	277V			2	2 circuits		4' sections
NW	narrow			AP	aluminum paint*	347	347V			+E(#)	emergency circuit		
GZ	graze					UNV	universal						
				*Additional 5 business days required.								Requires 120V or 277V Please consult factory.	

# Beam 3

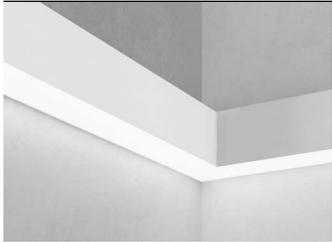

**IMPORTANT:** All corner patterns must be submitted with drawings indicating dimensions and angles degree.

15 business days

 [Click here for the spec sheet.](#)





## Ordering Guide

TB3WDLEDPAT									
PRODUCT ID		PATTERNS AND LENGTH (SELECT ONE)	LUMENS/FT		CRI	COLOUR TEMP.	SHIELDING DIRECT		
TB3WDLEDPAT	Beam 3 Wall Direct	<b>S(L)</b> square shape (length)	<b>300</b>	300 lm/ft - min	<b>80</b>	80 CRI	<b>35</b> 3500 K	<b>SO</b> spotless lens	
		<b>R(LxL)</b> rectangular shape (length)	<b>1000</b>	1000 lm/ft - max for GZ, NW, ASO.*				<b>30</b> 3000 K	<b>ASO</b> asymmetric
		<b>U(LxLxL)</b> U shape (length)						<b>40</b> 4000 K	<b>NW</b> narrow
		<b>L(LxL)</b> L shape (length)	<b>1100</b>	1100 lm/ft - max					<b>GZ</b> graze
		Comes in 90 degree only.	Outputs between listed min and max are available. * 1000 lm/ft max. only for GZ, NW and ASO.						

SPECIFY LENGTH		FINISH	VOLTAGE	DRIVER	CIRCUITS	BATTERY (OPT.)
<b>NL</b> nominal		<b>W</b> white	<b>120</b> 120V	<b>DP</b> dimming (0-10V) 1%	<b>1</b> 1 circuit	<b>B(#)</b> battery pack 4' sections
<b>EX</b> exact		<b>BLK</b> black*	<b>277</b> 277V		<b>2</b> 2 circuits	
		<b>AP</b> aluminum paint*	<b>347</b> 347V		<b>+E(#)</b> emergency circuit	
			<b>UNV</b> universal			
		*Additional 5 business days required.				Requires 120V or 277V Please consult factory.

# Beam 3

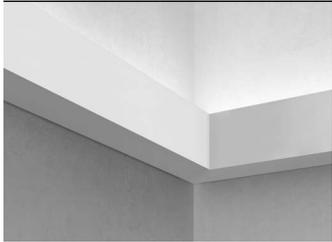

**IMPORTANT: All corner patterns must be submitted with drawings indicating dimensions and angles degree.**

**15 business days**

 [Click here for the spec sheet.](#)





## Ordering Guide

TB3WILEDPAT		PATTERNS AND LENGTH (SELECT ONE)		LUMENS/FT INDIRECT		CRI		COLOUR TEMP.		SHIELDING INDIRECT		SPECIFY LENGTH	
<b>TB3WILEDPAT</b>	Beam 3 Wall Indirect	<b>S(L)</b>	square shape (length)	<b>300</b>	300 lm/ft - min	<b>80</b>	80 CRI	<b>30</b>	3000 K	<b>S0</b>	spotless lens	<b>NL</b>	nominal
		<b>R(LxL)</b>	rectangular shape (length)	<b>1200</b>	1200 lm/ft - max			<b>35</b>	3500 K			<b>EX</b>	exact
		<b>U(LxLxL)</b>	U shape (length)					<b>40</b>	4000 K				
		<b>L(LxL)</b>	L shape (length)										
Comes in 90 degree only.				Outputs between listed min and max are available.									

FINISH		VOLTAGE		DRIVER		CIRCUITS		BATTERY (OPT.)	
<b>W</b>	white	<b>120</b>	120V	<b>DP</b>	dimming (0-10V) 1%	<b>1</b>	1 circuit	<b>B(#)</b>	battery pack
<b>BLK</b>	black*	<b>277</b>	277V			<b>2</b>	2 circuits		4' sections
<b>AP</b>	aluminum paint*	<b>347</b>	347V			<b>+E(#)</b>	emergency circuit		
		<b>UNV</b>	universal						
*Additional 5 business days required.								Requires 120V or 277V Please consult factory.	

# Beam 4

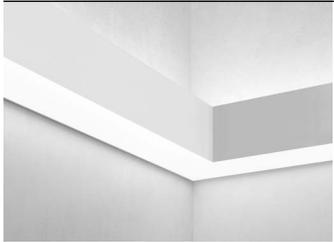

**IMPORTANT: All corner patterns must be submitted with drawings indicating dimensions and angles degree.**

**15 business days**

 [Click here for the spec sheet.](#)





## Ordering Guide

TB4WDILEDPAT								
PRODUCT ID	PATTERNS AND LENGTH (SELECT ONE)	LUMENS/FT INDIRECT		LUMENS/FT DIRECT		CRI	COLOUR TEMP.	SHIELDING INDIRECT
TB4WDILEDPAT	Beam 4 Wall Direct/Indirect	S(L) square shape (length) R(LxL) rectangular shape (length) U(LxLxL) U shape (length) L(LxL) L shape (length)	400 400 lm/ft - Min. 1200 1200 lm/ft - Max.	400 400 lm/ft - Min. 1000 1000 lm/ft - Max for GZ, NW, ASO.* 1200 1200 lm/ft - Max.	80 80 CRI	30 3000 K 35 3500 K 40 4000 K	SO spotless lens	
		Comes in 90 degree only.	Outputs between listed min and max are available.	Outputs between listed min and max are available. * 1000 lm/ft max. only for GZ, NW and ASO.				

SHIELDING DIRECT	SPECIFY LENGTH	FINISH	VOLTAGE	DRIVER	CIRCUITS	BATTERY (OPT.)
SO spotless lens ASO asymmetric NW narrow GZ graze	NL nominal EX exact	W white BLK black* AP aluminum paint*	120 120V 277 277V 347 347V UNV universal	DP dimming (0-10V) 1%	1 1 circuit 2 2 circuits +E(#) emergency circuit	B(#) battery pack (integral)
						Minimum 5ft; Not available with 347V Please consult factory.

# Beam 4

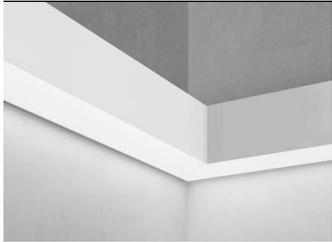

**IMPORTANT: All corner patterns must be submitted with drawings indicating dimensions and angles degree.**

15 business days

 [Click here for the spec sheet.](#)





## Ordering Guide

TB4WDLEDPAT		PATTERNS AND LENGTH (SELECT ONE)		LUMENS/FT		CRI		COLOUR TEMP.		SHIELDING DIRECT			
<b>TB4WDLEDPAT</b>	Beam 4 Wall Direct	<b>S(L)</b>	square shape (length)	<b>400</b>	400 lm/ft - Min.	<b>80</b>	80 CRI	<b>35</b>	3500 K	<b>SO</b>	spotless lens		
		<b>R(LxL)</b>	rectangular shape (length)	<b>1000</b>	1000 lm/ft - Max for GZ, NW, ASO.*			<b>30</b>	3000 K	<b>ASO</b>	Asymmetric	<b>NW</b>	Narrow
		<b>U(LxLxL)</b>	U shape (length)					<b>40</b>	4000 K	<b>GZ</b>	Graze		
		<b>L(LxL)</b>	L shape (length)	<b>1200</b>	1200 lm/ft - Max.								
		Comes in 90 degree only.		Outputs between listed min and max are available. * 1000 lm/ft max. only for GZ, NW and ASO.									

SPECIFY LENGTH		FINISH		VOLTAGE		DRIVER		CIRCUITS		BATTERY (OPT.)	
<b>NL</b>	nominal	<b>W</b>	white	<b>120</b>	120V	<b>DP</b>	dimming (0-10V) 1%	<b>1</b>	1 circuit	<b>B(#)</b>	battery pack (integral)
<b>EX</b>	exact	<b>BLK</b>	black*	<b>277</b>	277V			<b>2</b>	2 circuits		
		<b>AP</b>	aluminum paint*	<b>347</b>	347V			<b>+E(#)</b>	emergency circuit		
				<b>UNV</b>	universal						
		*Additional 5 business days required.								Minimum 5ft. Not available with 347V Please consult factory.	

# Beam 4

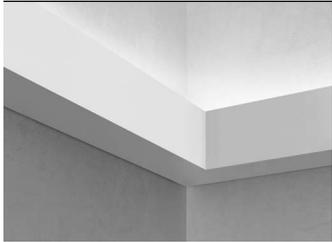

**IMPORTANT: All corner patterns must be submitted with drawings indicating dimensions and angles degree.**

**15 business days**


 [Click here for the spec sheet.](#)



## Ordering Guide

TB4WILEDPAT		PATTERNS AND LENGTH (SELECT ONE)		LUMENS/FT INDIRECT		CRI		COLOUR TEMP.		SHIELDING INDIRECT		SPECIFY LENGTH	
<b>TB4WILEDPAT</b>	Beam 4 Wall Indirect	<b>S(L)</b> square shape (length)	<b>400</b> 400 lm/ft - Min.	<b>80</b>	80 CRI	<b>30</b>	3000 K	<b>SO</b>	spotless lens	<b>NL</b>	nominal		
		<b>R(LxL)</b> rectangular shape (length)	<b>1200</b> 1200 lm/ft - Max.			<b>35</b>	3500 K			<b>EX</b>	exact		
		<b>U(LxLxL)</b> U shape (length)				<b>40</b>	4000 K						
		<b>L(LxL)</b> L shape (length)											
Comes in 90 degree only.				Outputs between listed min and max are available.									

FINISH		VOLTAGE		DRIVER		CIRCUITS		BATTERY (OPT.)	
<b>W</b>	white	<b>120</b>	120V	<b>DP</b>	dimming (0-10V) 1%	<b>1</b>	1 circuit	<b>B(#)</b>	battery pack
<b>BLK</b>	black*	<b>277</b>	277V			<b>2</b>	2 circuits		4' sections
<b>AP</b>	aluminum paint*	<b>347</b>	347V			<b>+E(#)</b>	emergency circuit		
		<b>UNV</b>	universal						
*Additional 5 business days required.								Requires 120V or 277V Please consult factory.	



**IMPORTANT: All corner patterns must be submitted with drawings indicating dimensions and angles degree.**

15 business days



Click here for the spec sheet.





## Ordering Guide

SCWDPAT		PATTERNS AND LENGTH (SELECT ONE)		LUMENS/FT		CRI		COLOUR TEMP.		SHIELDING DIRECT	
PRODUCT ID											
SCWDPAT	Sculpt Wall Direct Patterns	S(L)	square shape (length)	300	300 lm/ft - Min	80	80 CRI	35	3500 K	FL	flush
		R(LxL)	rectangular shape (length)	1000	1000 lm/ft - Max			30	3000 K	RG	0.5" regressed
		U(LxLxL)	U shape (length)					40	4000 K	ASO	asymmetric
		L(LxL)	L shape (length)								
		Comes in 90 degree only.		Outputs between listed min and max are available.						Lens options use spotless lens	

SPECIFY LENGTH		FINISH		VOLTAGE		DRIVER		CIRCUITS		BATTERY (OPT.)	
NL	nominal	W	white	120	120V	DP	dimming (0-10V) 1%	1	1 circuit	B(#)	battery pack
EX	exact	BLK	black*	277	277V			2	2 circuits		
		AP	aluminum paint*	347	347V			+E(#)	emergency circuit		
				UNV	universal						
		*Additional 5 business days required.								Not available with 347V Please consult factory.	

# Sculpt

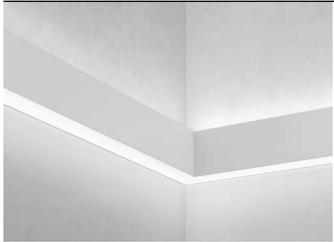

**IMPORTANT:** All corner patterns must be submitted with drawings indicating dimensions and angles degree.

15 business days





Click here for the spec sheet.



## Ordering Guide

SCWDIPAT		PATTERNS AND LENGTH (SELECT ONE)		LUMENS/FT INDIRECT		LUMENS/FT DIRECT		CRI		COLOUR TEMP.		SHIELDING INDIRECT	
PRODUCT ID													
SCWDIPAT	Sculpt Wall Direct/Indirect Patterns	S(L)	square shape (length)	300	300 lm/ft - Min.	300	300 lm/ft - Min.	80	80 CRI	30	3000 K	SO	spotless lens
		R(LxL)	rectangular shape (length)	1000	1000 lm/ft - Max.	500	500 lm/ft - Max.			35	3500 K		
		U(LxLxL)	U shape (length)							40	4000 K		
		L(LxL)	L shape (length)										
Comes in 90 degree only.				Outputs between listed min and max are available.									

SHIELDING DIRECT		SPECIFY LENGTH		FINISH		VOLTAGE		DRIVER		CIRCUITS		BATTERY (OPT.)	
FL	flush	NL	nominal	W	white	120	120V	DP	dimming (0-10V) 1%	1	1 circuit	B(#)	battery pack
RG	0.5" regressed	EX	exact	BLK	black*	277	277V			2	2 circuits		
ASO	asymmetric			AP	aluminum paint*	347	347V			+E(#)	emergency circuit		
				UNV	universal								
				*Additional 5 business days required.								5' minimum. For lengths under 5' battery pack is remote only. Not available with 347V. Please consult factory.	

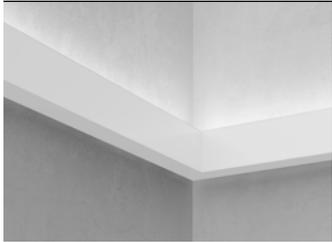

**IMPORTANT: All corner patterns must be submitted with drawings indicating dimensions and angles degree.**

**15 business days**

 [Click here for the spec sheet.](#)



## Ordering Guide

SCWIPAT		PATTERNS AND LENGTH (SELECT ONE)		LUMENS/FT INDIRECT		CRI		COLOUR TEMP.		SHIELDING INDIRECT		SPECIFY LENGTH	
<b>SCWIPAT</b>	Sculpt Wall Indirect Patterns	<b>S(L)</b> square shape (length)	<b>300</b> 300 lm/ft - Minimum	<b>80</b>	80 CRI	<b>30</b>	3000 K	<b>SO</b>	spotless lens	<b>NL</b>	nominal	<b>EX</b>	exact
		<b>R(LxL)</b> rectangular shape (length)	<b>1000</b> 1000 lm/ft - Maximum			<b>35</b>	3500 K						
		<b>U(LxLxL)</b> U shape (length)				<b>40</b>	4000 K						
		<b>L(LxL)</b> L shape (length)											
		Comes in 90 degree only.		Outputs between listed min and max are available.									

FINISH		VOLTAGE		DRIVER		CIRCUITS		BATTERY (OPT.)	
<b>W</b>	white	<b>120</b>	120V	<b>DP</b>	dimming (0-10V) 1%	<b>1</b>	1 circuit	<b>B(#)</b>	battery pack
<b>BLK</b>	black*	<b>277</b>	277V			<b>2</b>	2 circuits		
<b>AP</b>	aluminum paint*	<b>347</b>	347V			<b>+E(#)</b>	emergency circuit		
		<b>UNV</b>	universal						
*Additional 5 business days required.								Remote, 5 feet linear length minimum required for integral battery; Please consult factory.	



## Decorative Pendant



## Decorative Pendant

The QuickShip+ Decorative Pendant Lighting Fixtures offer a convenient and expedited solution for adding a touch of style and ambiance to interior spaces.

# DECORATIVE PENDANT

CHIME CYLINDER  
PENDANT



CHIME TAPER  
PENDANT



LUNA ORB PENDANT



HELIOS DISK



## OPTIONS

Distribution	Direct	Direct	Direct	Direct
Lumens	HI (1700lm)	HI (1700lm)	1200lm	LO (1500 -1700lm) HI (2400 - 2700lm)
CRI	90	90	90	90
CCT	2700K / 3000K / 3500K / 4000K	2700K / 3000K / 3500K / 4000K	2700K / 3000K / 3500K / 4000K	2700K / 3000K / 3500K / 4000K
Length	1.5' / 2' / 3'	1.5' / 2' / 3'	-	-
Finish	Maple Wood finish / Black / White	Maple Wood finish	White / Black <sup>(1)</sup> / Aluminum <sup>(1)</sup>	White / Black <sup>(1)</sup> / Aluminum <sup>(1)</sup>
Voltage	Universal	Universal	Universal	Universal
Driver	Dimming (0-10V) 1%	Dimming (0-10V) 1%	Dimming (0-10V) 1%	Dimming (0-10V) 1%
Circuits	1	1	1	1
Mounting	FCP	FCP	FCP	FCP

(1) Additional 5 business days required.

# Chime Cylinder



These pendants resemble drop earrings. **Chime Cylinder** pendants combine real wood construction and stunning chrome trims. Use in singles or groupings to define areas, or create a staggered look.

10 business days

 [Click here for the spec sheet.](#)



## Ordering Guide

CCPD					90					
PRODUCT ID	LENGTH	BEAM ANGLE	NOM. LUMENS	CRI	COLOR TEMP.	HOUSING FINISH		VOLTAGE		
CCPD Chime Cylinder Pendant	1.5 1.5' 2 2' 3 3'	NB narrow MB medium* WB wide	HI high lumen output	90 90 CRI	27 2700K 30 3000K 35 3500K 40 4000K	NMP maple wood with natural finish BLK metal with black finish W metal with white finish		UNV universal (120-277V)		
		* Default option.								

DRIVER	TRIM FINISH	MOUNTING	MOUNTING FINISH	PENDANT CABLE LENGTH
DP dimming (0-10V or TRIAC) 1% *	SCR silver chrome BLK black* W white**	FCP flat stand alone canopy, driver in j-box	BLK black W white	TLA(L) cable length adjustable (specify length between 6" and 140" – includes 18" of additional internal cable for on-site adjustment)
* TRIAC dimming for line voltage capable (120V voltage only), purple and pink wires need to be capped in that case.	* Not available with NMP (natural maple) and W (white) housing. ** Not available with NMP (natural maple) and BLK (black) housing.	Round canopy used.		Black, plenum rated cable, 1/8" diameter used.

# Chime Taper



Jewelry-inspired pendants combining real wood construction and stunning chrome trims. Use in singles or groupings to define areas, or create a staggered look to showcase a larger space.

10 business days

 [Click here for the spec sheet.](#)



## Ordering Guide

CTPD		LENGTH		BEAM ANGLE		NOM. LUMENS		90		COLOR TEMP.		HOUSING FINISH		VOLTAGE	
PRODUCT ID															
CTPD	Chime Taper Pendant	1.5	1.5'	NB	narrow	HI	high lumen output	90	90 CRI	27	2700K	NMP	natural maple	UNV	universal (120-277V)
		2	2'	MB	medium*					30	3000K				
		3	3'	WB	wide					35	3500K				
										40	4000K				
				* Default option.											

DRIVER		SCR		MOUNTING		MOUNTING FINISH		PENDANT CABLE LENGTH	
		TRIM FINISH						TLA(L)	
DP	dimming (0-10V or TRIAC) 1%	SCR	silver chrome	FCP	flat stand alone canopy, driver in j-box*	BLK	black		cable length adjustable (specify length between 6" and 140" – includes 18" of additional internal cable for on-site adjustment)
						W	white		
* Triac dimming for line voltage capable (120V voltage only), purple and pink wires need to be capped in that case.				Round canopy used.				Black, plenum rated cable, 1/8" diameter used.	

# Luna Orb



Soften your surroundings with the round embrace and classic look of **Luna Orb**.

10 business days



Click here for the spec sheet.



## Ordering Guide

LOPD		SO		1200		90		COLOR TEMP.		HOUSING FINISH		VOLTAGE			
PRODUCT ID		SHIELDING		ORIENTATION		NOM. LUMENS		CRI		HOUSING FINISH		VOLTAGE			
<b>LOPD</b>	Luna Orb Pendant	<b>SO</b>	spotless lens	<b>STR</b>	straight	<b>1200</b>	1200 lm	<b>90</b>	90 CRI	<b>30</b>	3000 K	<b>W</b>	white	<b>UNV</b>	universal (120-277V)
				<b>TLT</b>	tilted 30°					<b>35</b>	3500 K	<b>BLK</b>	black		
										<b>40</b>	4000 K				

DRIVER		MOUNTING		MOUNTING FINISH		PENDANT CABLE LENGTH	
<b>DP</b>	dimming (0-10V 1% or TRIAC) *	<b>FCP</b>	flat stand alone canopy, driver in j-box	<b>BLK</b>	black	<b>TLA(L)</b>	cable length adjustable (specify length between 6" and 140" – includes 18" of additional internal cable for on-site adjustment)
				<b>W</b>	white		
* Triac dimming for line voltage capable (120V voltage only), purple and pink wires need to be capped in that case.		Round canopy used.				Black, plenum rated cable, 1/8" diameter used.	





1.800.263.AXIS  
T 514.948.6272

F 514.948.6271

[axislighting.com](https://www.axislighting.com)  
f @ t p v in

© 2023 Axis Lighting Inc. | FIRST EDITION