





Project _____

Type _____

Notes _____

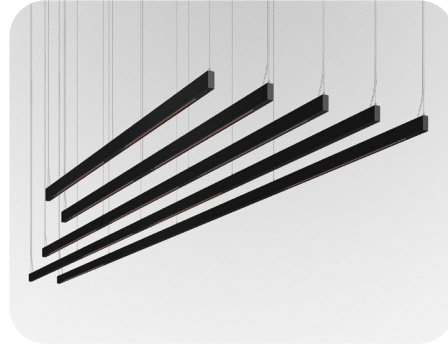

8ft Linear Kit:

- 1 x Framework: 4ft segments (2) + I180 Hub (1) + EC Hub (2)
- 2 x AxisTrak™ Inserts (4ft)



10ft Linear:

- 1 x Framework: 5ft segments (2) + I180 Hub (1) + EC Hub (2)
- 2 x AxisTrak™ Inserts (5ft)
- 2 x Indirect Surroundlite Inserts (5ft)



15ft Linear:

- 1 x Framework: 5ft segments (3) + I180 Hub (2) + EC Hub (2)
- 3 x AxisTrak™ Inserts (5ft)
- 3 x Indirect Surroundlite Inserts (5ft)



20ft Linear Mid Axistrak™:

- 1 x Framework: 5ft segments (4) + I180 Hub (3) + EC Hub (2)
- 2 x AxisTrak™ Inserts (5ft)
- 2 x Indirect Surroundlite Inserts (5ft)



20ft Linear Edge Axistrak™:

- 1 x Framework: 5ft segments (4) + I180 Hub (3) + EC Hub (2)
- 2 x AxisTrak™ Inserts (5ft)
- 2 x Indirect Surroundlite Inserts (5ft)

Patented Design

Product design and development is an ongoing process at Axis Lighting. We reserve the right to change specifications. Contact Axis for the latest product information.



AxisTrak™ decoratives must be ordered separately. Please follow the link:



Project _____

Type _____

Notes _____

Ordering Guide Framework

PRODUCT ID	FINISH	UNV VOLTAGE	CONTROLS	CIRCUITS	MOUNTING/SUSPENSION	CANOPY
8 foot Linear Pendant 10 foot Linear Pendant 15 foot Linear Pendant 20 foot Mid Axistrak Linear Pendant 20 foot Edge Axistrak Linear Pendant	BLK black W white AP aluminum paint C(#) custom	UNV universal	IMW Integral Modular Wiring for 0-10V dimming (1%) with DP integral driver IMWD Integral Modular Wiring for DALI 2.0 with DALIDT6 integral driver	Number of circuits will depend on the ordered kit, and matches lighting Zone count	CA(#) drywall+cable length (36" std.) SLV(#) drywall+stem length <48" (18" std.) leveling	RC round canopy SC square canopy*
		Wired for 120V to determine power drops.			Specify suspension length * See Mounting kit guide for full specification code . White canopy standard. Other canopies are available. Please visit the link above.	*Not available with (SLV) stem mounting.

Ordering Guide Linear Lighting Inserts

SFLDAXT	PRODUCT ID	TOTAL LENGTH	UNV VOLTAGE	CONTROLS	HOUSING FINISH
SFLDAXT	StencilFlex® AxisTrak™ Insert	4 4' 5 5'	UNV universal	DPCV integral 48V driver 60W max. 0-10V dimming through two added contacts on AxisTrak™ DALIDT6CV integral 48V driver 60W max. DALI dimming through two added contacts on AxisTrak™	BLK black W white
			Wired for 120V to determine power drops.		! Please be mindful of your Framework Color Selection when selecting your insert housing finish.

PRODUCT ID	TOTAL LENGTH	TOTAL LUMENS/FT	CRI	COLOR TEMP.	VOLTAGE	CONTROLS
SFLISL	StencilFlex® Indirect SurroundLite Insert	5 5'	175 175 lm/ft 250 250 lm/ft 350 350 lm/ft 500 500 lm/ft 700 700 lm/ft 1000 1000 lm/ft	80 80 CRI 90 90 CRI	27 2700 K 30 3000 K 35 3500 K 40 4000 K	UNV universal DP integral driver 0-10V dimming (1%) - wired DALIDT6 integral driver DALI 2.0 Type 6 - wired
	2 feet lit segment.				Wired for 120V to determine power drops.	

Patented Design

Product design and development is an ongoing process at Axis Lighting. We reserve the right to change specifications. Contact Axis for the latest product information.

2 / 2

February 26, 2024

FILE NAME:SF_AXT_LIN.SPEC

© 2016 Axis Lighting Inc.
1.800.263.2947
[T] 514.948.6272

axis
axislighting.com