





Project _____

Type _____

Notes _____

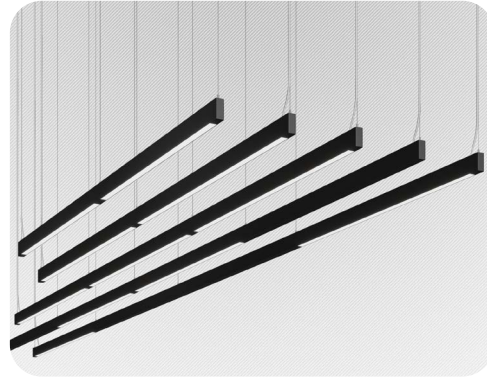

8ft Linear:

- 1 x Framework: 4ft segments (2) + I180 Hub (1) + EC Hub (2)
- 2 x Direct Flush Spotless Lens Inserts (4ft)



10ft Linear:

- 1 x Framework: 5ft segments (2) + I180 Hub (1) + EC Hub (2)
- 2 x Direct Flush Spotless Lens Inserts (5ft)
- 2 x Indirect Surroundlite Inserts (5ft)



15ft Linear:

- 1 x Framework: 5ft segments (3) + I180 Hub (2) + EC Hub (2)
- 3 x Direct Flush Spotless Lens Inserts (5ft)
- 3 x Indirect Surroundlite Inserts (5ft)



20ft Mid Lit Linear:

- 1 x Framework: 5ft segments (4) + I180 Hub (3) + EC Hub (2)
- 2 x Direct Flush Spotless Lens Inserts (5ft)
- 2 x Indirect Surroundlite Inserts (5ft)



20ft Ends Lit Linear:

- 1 x Framework: 5ft segments (4) + I180 Hub (3) + EC Hub (2)
- 2 x Direct Flush Spotless Lens Inserts (5ft)
- 2 x Indirect Surroundlite Inserts (5ft)

Patented Design

Product design and development is an ongoing process at Axis Lighting. We reserve the right to change specifications. Contact Axis for the latest product information.

Project _____

Type _____

Notes _____

Ordering Guide Framework

PRODUCT ID	FINISH	UNV		CONTROLS	CIRCUITS	MOUNTING/SUSPENSION		CANOPY
		VOLTAGE						
8 foot Linear Pendant 10 foot Linear Pendant 15 foot Linear Pendant 20 foot Mid Lit Linear Pendant 20 foot Edge Lit Linear Pendant	BLK black W white AP aluminum paint C(#) custom	UNV universal		IMW Integral Modular Wiring for 0-10V dimming (1%) with DP integral driver IMWD Integral Modular Wiring for DALI 2.0 with DALIDT6 integral driver	Number of circuits will depend on the ordered kit, and matches lighting Zone count	CA(#) drywall+cable length (36" std.)* SLV(#) drywall+stem length <48" (18" std.) leveling		RC round canopy SC square canopy*
						Specify suspension length * See Mounting kit guide for full specification code. White canopy standard. Other canopies are available. Please visit the link above.		Not available with (SLV) stem mounting.

Ordering Guide Linear Lighting Inserts

SFLDSOFL						UNV			
PRODUCT ID	MODULE LENGTH	TOTAL LUMENS/FT		CRI		VOLTAGE		CONTROLS	
SFLDSOFL StencilFlex® Direct Linear Insert SO Flush Lens	4 4'	200	200 lm/ft	80	80 CRI	27	2700 K	UNV	universal
	5 5'	300	300 lm/ft	90	90 CRI	30	3000 K		
		400	400 lm/ft			35	3500 K		
						40	4000 K		

PRODUCT ID	TOTAL LENGTH	TOTAL LUMENS/FT		CRI		VOLTAGE		CONTROLS	
SFLISL StencilFlex® Indirect SurroundLite Insert	5 5'	175	175 lm/ft	80	80 CRI	27	2700 K	UNV	universal
		250	250 lm/ft	90	90 CRI	30	3000 K		
		350	350 lm/ft			35	3500 K		
		500	500 lm/ft			40	4000 K		
		700	700 lm/ft						
		1000	1000 lm/ft						
	2 feet lit segment.								

Patented Design

Product design and development is an ongoing process at Axis Lighting. We reserve the right to change specifications. Contact Axis for the latest product information.