





Project _____


Type _____

Notes _____




4ft Square:

- 1 x Framework: 4ft segments (4) + L90Hub (4)
- 2 x AxisTrak™ Inserts (4ft)
- 1 x Optional Softzone 90° Triangle TR90 panel (4ft)



5ft Square:

- 1 x Framework: 5ft segments (4) + L90Hub (4)
- 2 x AxisTrak™ Inserts (5ft)
- 4 x Indirect Surroundlite Inserts (5ft)
- 1 x Optional Softzone 90° Triangle TR90 panel (4ft)




6ft Square:

- 1 x Framework: 6ft segments (4) + L90Hub (4)
- 2 x AxisTrak™ Inserts (6ft)
- 4 x Indirect Surroundlite Inserts (6ft)
- 1 x Optional Softzone 90° Triangle TR90 panel (4ft)



4x8ft Rectangle:

- 1 x Framework: 4ft segments (6) + L90Hub (4) + I180 (2)
- 2 x AxisTrak™ Inserts (4ft)
- 2 x Optional Softzone 90° Triangle TR90 panel (4ft)

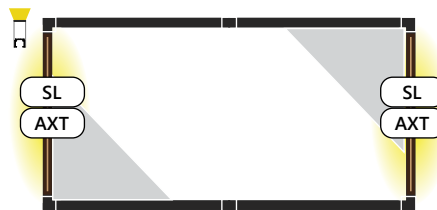

5x10ft Rectangle:

- 1 x Framework: 5ft segments (6) + L90Hub (4) + I180 (2)
- 2 x AxisTrak™ Inserts (5ft)
- 6 x Indirect Surroundlite Inserts (5ft)
- 2 x Optional Softzone 90° Triangle TR90 panel (4ft)



6x12ft Rectangle:

- 1 x Framework: 6ft segments (6) + L90Hub (4) + I180 (2)
- 2 x AxisTrak™ Inserts (6ft)
- 6 x Indirect Surroundlite Inserts (6ft)
- 2 x Optional Softzone 90° Triangle TR90 panel (4ft)

Patented Design

Product design and development is an ongoing process at Axis Lighting. We reserve the right to change specifications. Contact Axis for the latest product information.



Project _____

Type _____

Notes _____

AxisTrak™ decoratives must be ordered separately. Please follow the link:



Ordering Guide Framework

PRODUCT ID	FINISH	UNV VOLTAGE	CONTROLS	CIRCUITS	MOUNTING/SUSPENSION	CANOPY
4 foot Square Pendant 5 foot Square Pendant 6 foot Square Pendant 4x8 foot Rectangle Pendant 5x10 foot Rectangle Pendant 6x12 foot Rectangle Pendant	BLK black W white AP aluminum paint C(#) custom*	UNV universal	IMW Integral Modular Wiring for 0-10V dimming (1%) with DP integral driver IMWD Integral Modular Wiring for DALI 2.0 with DALIDT6 integral driver	Number of circuits will depend on the ordered kit, and matches lighting Zone count	CA(#) drywall+cable length (36" std.) SLV(#) drywall+stem length <48" (18" std.) leveling	RC round canopy SC square canopy*
* You can match framework finish to Standard Palette Softzone panels.		Wired for 120V to determine power drops.			Specify suspension length * See Mounting kit guide for full specification code . White canopy standard. Other canopies are available. Please visit the link above.	Not available with (SLV) stem mounting.

Ordering Guide Linear Lighting Inserts

SFLDAXT PRODUCT ID	TOTAL LENGTH	UNV VOLTAGE	CONTROLS	HOUSING FINISH
SFLDAXT StencilFlex® AxisTrak™ Insert	4 4' 5 5' 6 6'	UNV universal	DPCV integral 48V driver 60W max. 0-10V dimming through two added contacts on AxisTrak™ * DALIDT6CV integral 48V driver 60W max. DALI dimming through two added contacts on AxisTrak™ *	BLK black W white
		Wired for 120V to determine power drops.		* Available with multicircuit wiring. ** See page 2 for supported platforms.
				! Please be mindful of your Framework Color Selection when selecting your insert housing finish.

PRODUCT ID	TOTAL LENGTH	TOTAL LUMENS/FT	CRI	COLOR TEMP.	VOLTAGE	CONTROLS
SFLISL StencilFlex® Indirect SurroundLite Insert	5 5' 6 6'	175 175 lm/ft 250 250 lm/ft 350 350 lm/ft 500 500 lm/ft 700 700 lm/ft 1000 1000 lm/ft	80 80 CRI 90 90 CRI	27 2700 K 30 3000 K 35 3500 K 40 4000 K	UNV universal	DP integral driver 0-10V dimming (1%) - wired DALIDT6 integral driver DALI 2.0 Type 6 - wired
*2 feet lit segment.				Wired for 120V to determine power drops.		

Ordering Guide SoftZone® Panels (Optional)

PRODUCT ID		Panel ID (Color)																		
		PANEL ID			SOFTZONE PANEL COLOR															
					COT	cotton		SAN	sand		PUR	purple								
SFSZ	StencilFlex® Softzone Panels	Triangle	TR904	4' triangle- 90° only	CUSMAR	marble		COR	cork		OCE	ocean								
					TIN	tin		LEM	lemon		CUSNAV	navy								
					CON	concrete		CUSAPP	apple green		CUSPEB	pebble								
					SLA	slate		BRI	brick		CUSSHA	shadow								
					CAR	carbon		CUSMAN	maroon											
				Matching framework finishes available.																

Patented Design

Product design and development is an ongoing process at Axis Lighting. We reserve the right to change specifications. Contact Axis for the latest product information.